




P	LTR	DESCRIPTION	DATE	DWN	APVD
A		REVISED PER ECR-17-015449	26OCT2017	BDA	KR

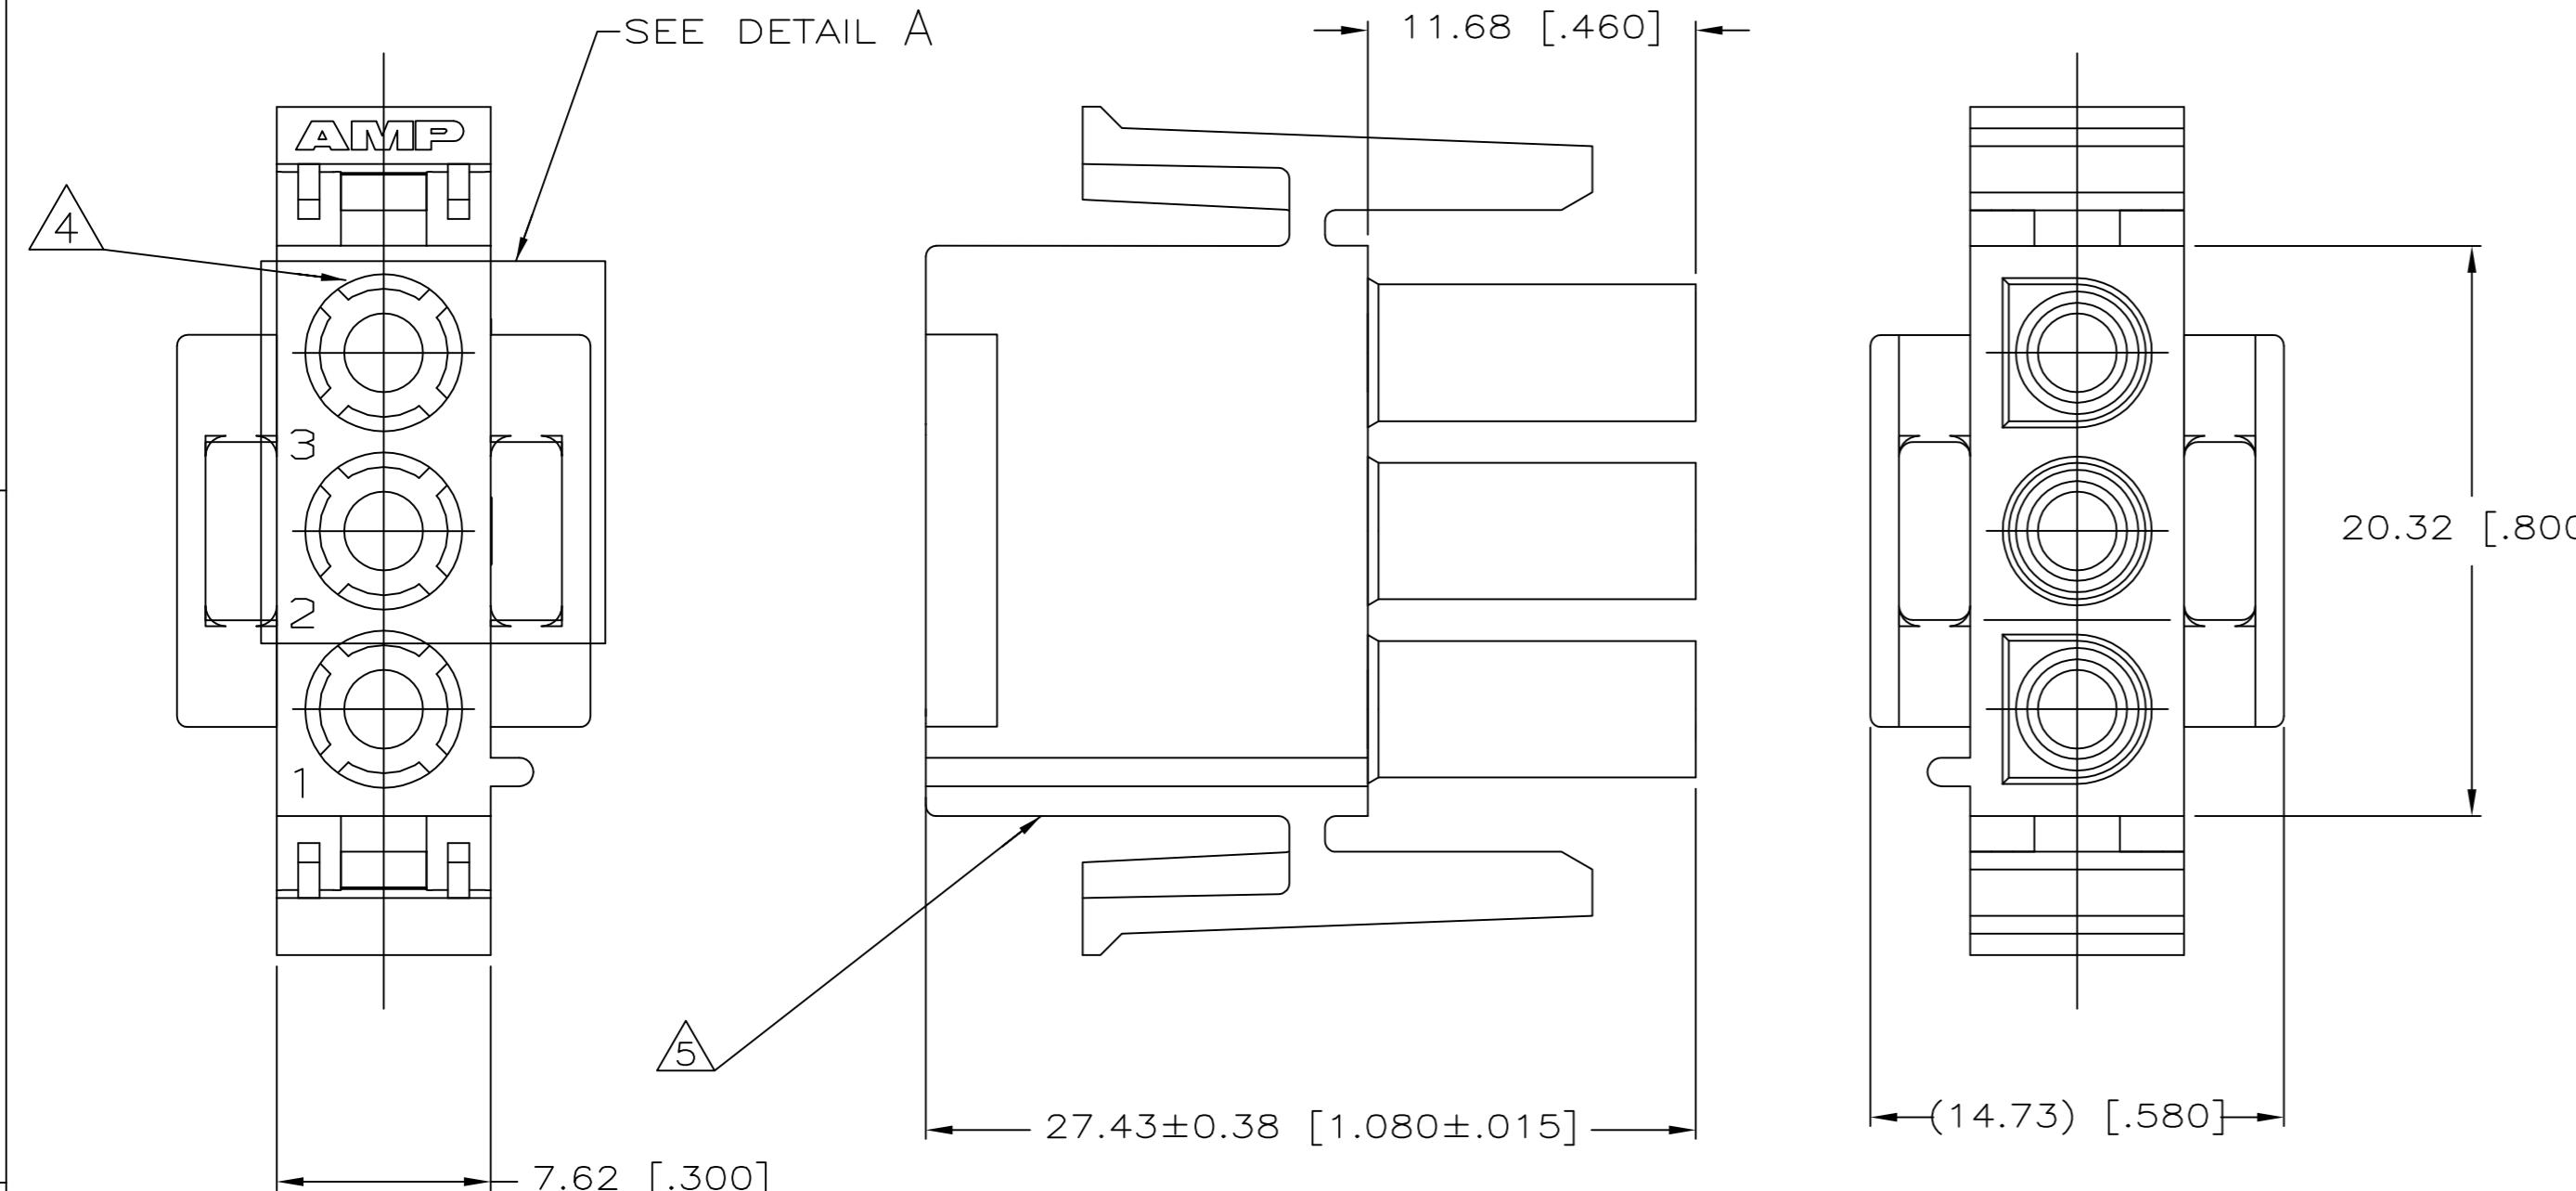

1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ CAP OR HEADER.
2. SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS [1.0 LBS]. NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS [.5 LBS].
3. DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
4. FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
5. UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.

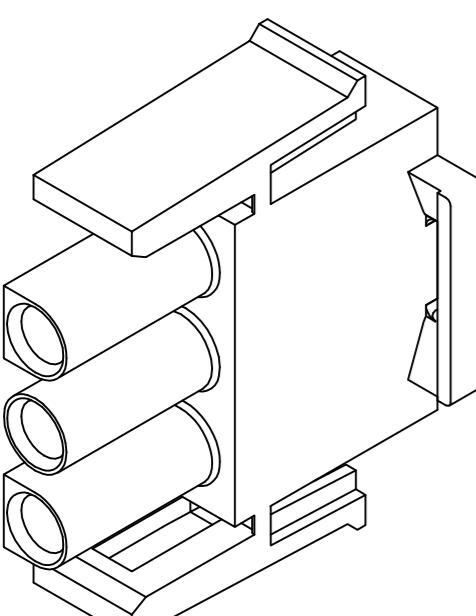

3-DIMENSIONAL MODEL
NTS

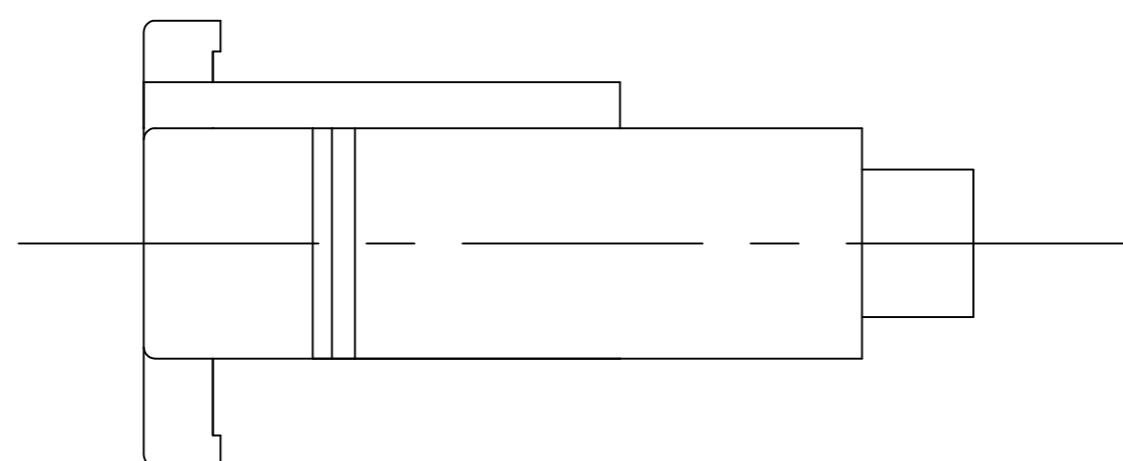

DETAIL A
OPTIONAL CONSTRUCTION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 05-MAR-2004	
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	S. HOOVER 05-MAR-2004	CHK 05-MAR-2004
0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES	± ± 0.13 [.005] ±	S. RIDGILL 05-MAR-2004	S. RIDGILL 05-MAR-2004
PRODUCT SPEC	APPLICATION SPEC	NAME	
MATERIAL NYLON, UL 94V-2	FINISH	TE Connectivity	
WEIGHT		PLUG, 3 CIRCUIT, UV RESISTANT UNIVERSAL MATE-N-LOK™	
A200779	C=1586377	SIZE	CAGE CODE
		DRAWING NO	RESTRICTED TO
CUSTOMER DRAWING		SCALE 4:1	1 OF 1 REV A