


envelope $\varnothing$ 15.5mm in final assembled state

Kabelabgang 360°, frei drehbar
 cable junction 360°, free turnable

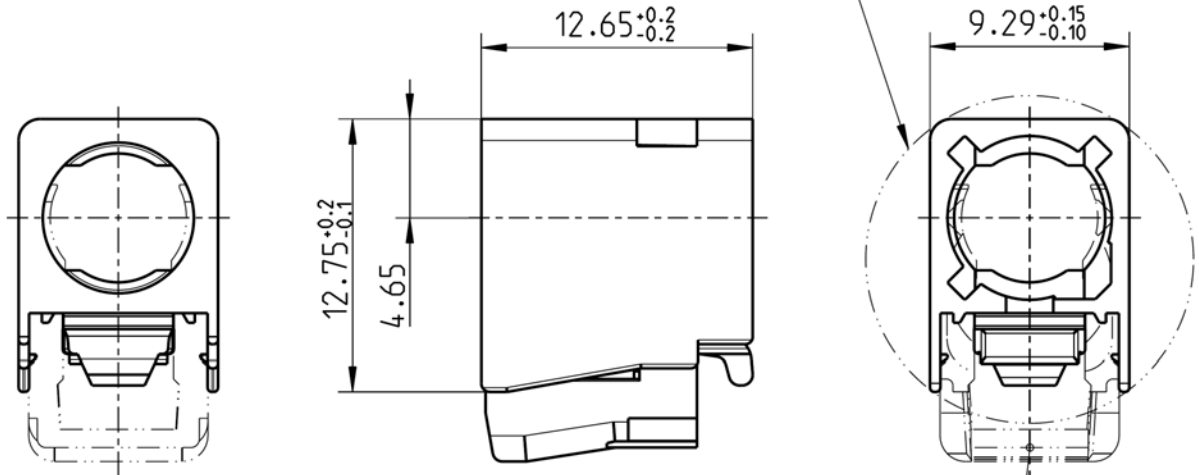

secondary-locking, in delivery condition
 (pre assembled position)

All dimensions are in mm; tolerances according to ISO 2768 m-H
 Y = Part number has to be accomplished by codification

Interface and coding

According to

DIN 72594-1

Material and plating**Connector parts**

Housing

Secondary lock

Material

POM

POM

Mechanical data

Mating cycles	≥ 25
Retention force latch	≥ 110 N
Retention force primary lock	≥ 80 N
Retention force secondary lock	≥ 60 N
Coding efficiency	≥ 40 N

Environmental data

Temperature range	-40°C to +105°C
Thermal shock	DIN 72594-2 clause 6.2
Temperature and humidity	DIN 72594-2 clause 6.3
Vibration and mechanical shock	DIN 72594-2 clause 6.1
Dry heat	DIN 72594-2 clause 6.4
2002/95/EC (RoHS)	compliant

Application

Applicable e.g. for following connectors:	59K25A-1xxA4 *
	59K25C-1xxA4 *
	59K25H-1xxA4 *

* -xx for all available cable variations

Packing

Standard	500 pcs in box
Weight	0.91 g/pce

Coding

Part Number has to be accomplished by codification

Coding		Color	RAL	Part-Number
	A	black	sim. 9005	59Z006-T00-A
	B	white	sim. 9001	59Z006-T00-B
	C	blue	sim. 5005	59Z006-T00-C
	D	bordeauxviolet	sim. 4004	59Z006-T00-D
	E	green	sim. 6002	59Z006-T00-E
	F	brown	sim. 8011	59Z006-T00-F
	G	grey	sim. 7031	59Z006-T00-G
	H	violet	sim. 4003	59Z006-T00-H
	I	beige	sim. 1001	59Z006-T00-I
	K	curry	sim. 1027	59Z006-T00-K
	L	Carmine red	sim. 3002	59Z006-T00-L
	M	pastel orange	sim. 2003	59Z006-T00-M
	N	pastel green	sim. 6019	59Z006-T00-N
	Z	waterblue	sim. 5021	59Z006-T00-Z

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Denis Oberhöller	04/04/05	T. Hoefling	04.08.09	d00	09-0514	Manfred Ruf	21/07/09
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de				Tel.: +49 8684 18-0 Fax: +49 8684 18-499 email: info@rosenberger.de			Page 2 / 2