


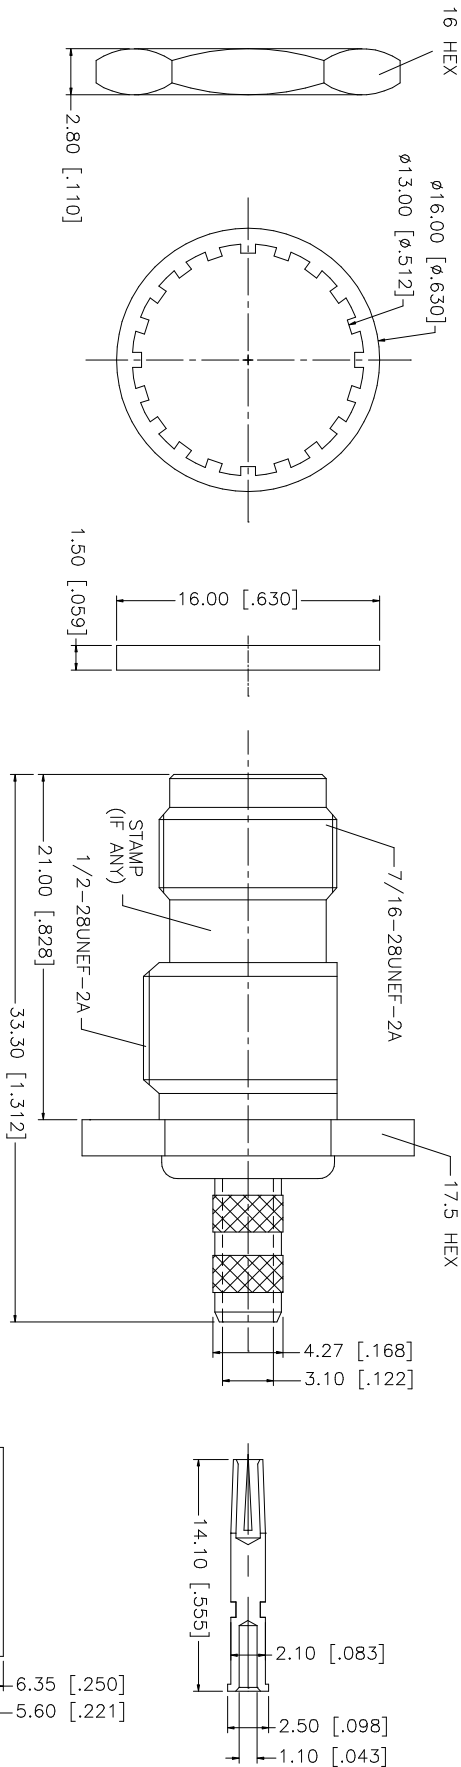


DESCRIPTION		
REV.	DATE	
NC	01/21/03	INITIAL RELEASE
A	10/10/05	ADD NOTE: 
B	10/31/05	CHANGE GASKET MATERIAL TO SILICONE

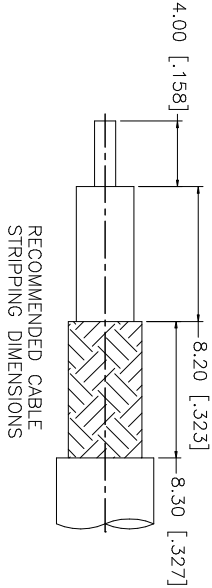

RECOMMENDED
MOUNTING HOLE

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"
3. MAX. PANEL THICKNESS = 6.5mm
 UL APPROVED.

Amphenol Connex

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:		
0.5 - 8mm ± 0.20mm	8 - 30mm ± 0.40mm	30 - 120mm ± 0.50mm
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:		
.020 - .315 ± 0.007"	.315 - 1.180 ± 0.015"	1.180 - 4.724 ± 0.020"
DO NOT SCALE DRAWING		
CAD FILE C:/122/122479.DWG		
DWG. NO. 122479.DWG		
REV. B		
SIZE A		
SCALE NA		
PART DESCRIPTION		
TNC BULKHEAD CRIMP JACK (FOR RG-142A/U, 223/U, 400/U CABLE)		
PART NO. 122479		
APPROVALS		
DRAWN	G.R.S.	DATE
CHECKED		
ISSUED		
SHEET	1 OF 1	
DESCRIPTION		
MATERIAL		
FINISH		
QTY		
16 HEX		
FERRULE		
HEX NUT		
LOCK WASHER		
GASKET		
CONTACT PIN		
INSULATOR		
BODY		
DESCRIPTION		
MATERIAL		
FINISH		
QTY		