
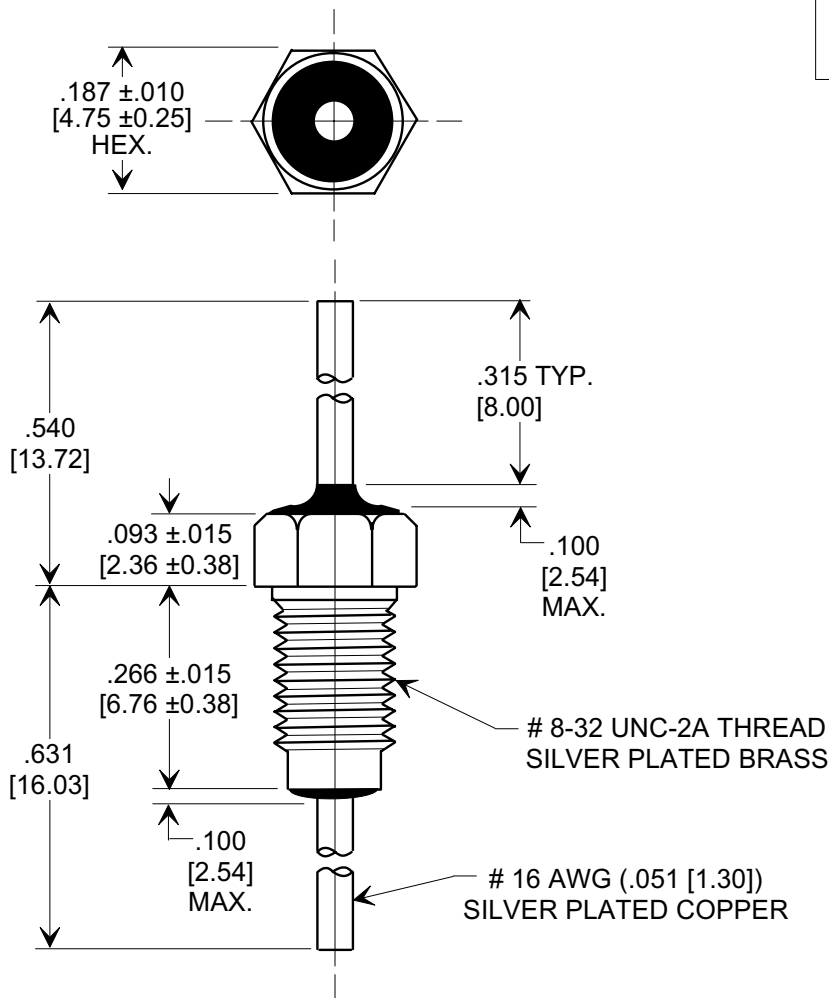



MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.



SPECIFICATIONS

TUSONIX STYLE:	2425-550
VALUE:	1000 pF
VALUE TOL.:	- 0%, +100%
TEMP. COEF.:	X7R
RATING:	100 VDC @ + 125°C
OPERATING RANGE:	-55°C TO +125°C
CURRENT (A)	20
INSULATION RESISTANCE:	10,000 MEGOHMS (MIN) @ 25 °C
DWV	600 VDC

NOTES:

- SUPPLIED WITH SILVER PLATED HEX NUT AND LOCK WASHER.
- MOUNTING TORQUE NOT TO EXCEED 5 lb-in MAX. [.565 N-m]
- TUSONIX STANDARD PART NUMBER: 2425-550-X7R0-102P. TUSONIX RoHS COMPLIANT PART NUMBER: 2425-550-X7R0-102P LF. CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
- PART MARKING: STANDARD PART: BLACK INK FOR TRADEMARK AND CAP. CODE. RoHS PART: GREEN FOR TRADEMARK AND CAP CODE.

REVISION RECORD Original Release C.O. WAS SK 8038-057 L.E. 11-08-02 20021105-2-03 ADDED NOTES 2-4. S.M. 02-10-06 20060109-5-06 1	--TOLERANCES-- Unless Otherwise Specified		Title MINIATURE BUSHING FEED-THRU	
	DECIMAL $\pm .031$ [0.79]		Drawn S.M. 10-23-02	
	ANGLES \pm		Scale 4 X	
	TUSONIX TUCSON, ARIZONA		Approved B.Mc. 10-23-02	
		A		2425-550-X7R0-102P