
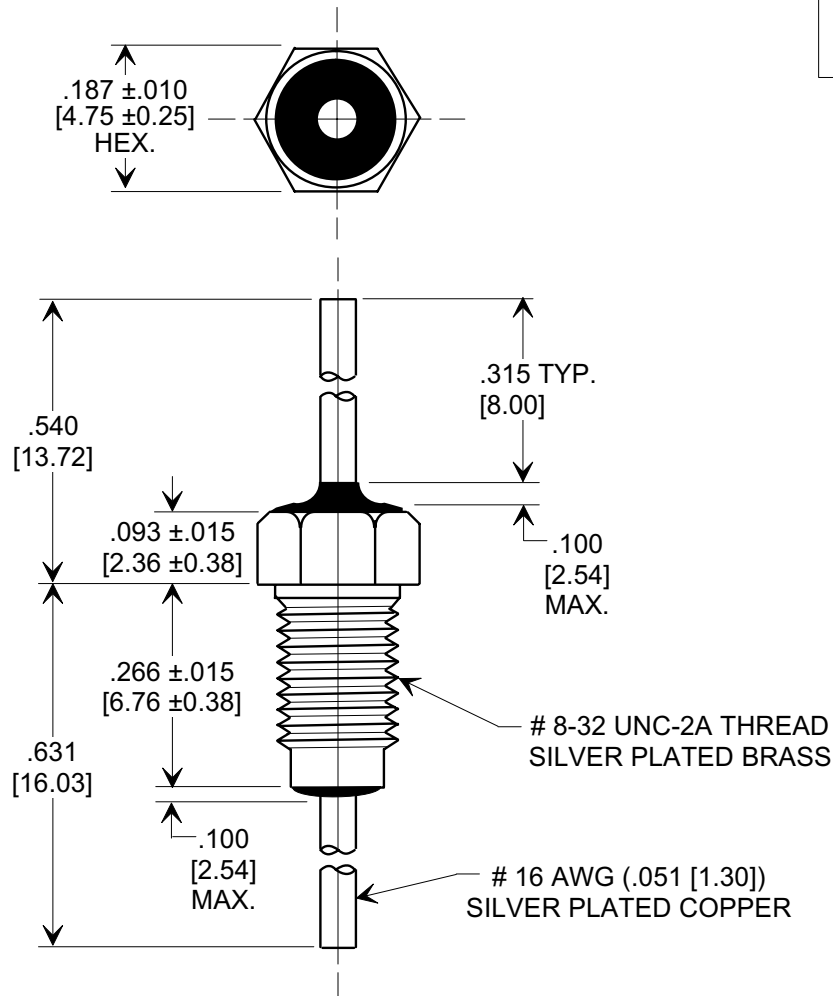



DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

**Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.**



TUSONIX STYLE:	2425-550
VALUE:	1000 pF
VALUE TOL.:	- 0%, +100%
TEMP. COEF.:	X7R
RATING:	100 VDC @ + 125°C
OPERATING RANGE:	-55°C TO +125°C
CURRENT (A)	20
INSULATION RESISTANCE:	10,000 MEGOHMS (MIN) @ 25 °C
DWV	600 VDC

1. SUPPLIED WITH SILVER PLATED
HEX NUT AND LOCK WASHER.
2. MOUNTING TORQUE NOT TO EXCEED
5 lb-in MAX. [.565 N-m]
1. TUSONIX STANDARD PART NUMBER:
2425-550-X7R0-102P.
TUSONIX RoHS COMPLIANT PART
NUMBER: 2425-550-X7R0-102P LF.
CUSTOMER MUST SPECIFY STANDARD
OR RoHS PART NUMBER WHEN
ORDERING.
3. PART MARKING: STANDARD PART:
BLACK INK FOR TRADEMARK AND CAP.
CODE. RoHS PART: GREEN FOR
TRADEMARK AND CAP CODE.

<div>REVISION RECORD</div> <div>Original Release C.O. WAS SK 8038-057 L.E. 11-08-02 20021105-2-03 ADDED NOTES 2-4. S.M. 02-10-06 20060109-5-06</div>	0	1	<div>--TOLERANCES-- Unless Otherwise Specified</div>	<div>Title</div> <div>MINIATURE BUSHING FEED-THRU</div>	
	DECIMAL ± .031 [0.79]				
	ANGLES ± 		Drawn	S.M. 10-23-02	Scale 4 X
	<div>TUSONIX</div> <div>TUCSON, ARIZONA</div>		Approved B.Mc. 10-23-02		
A			2425-550-X7R0-102P		