
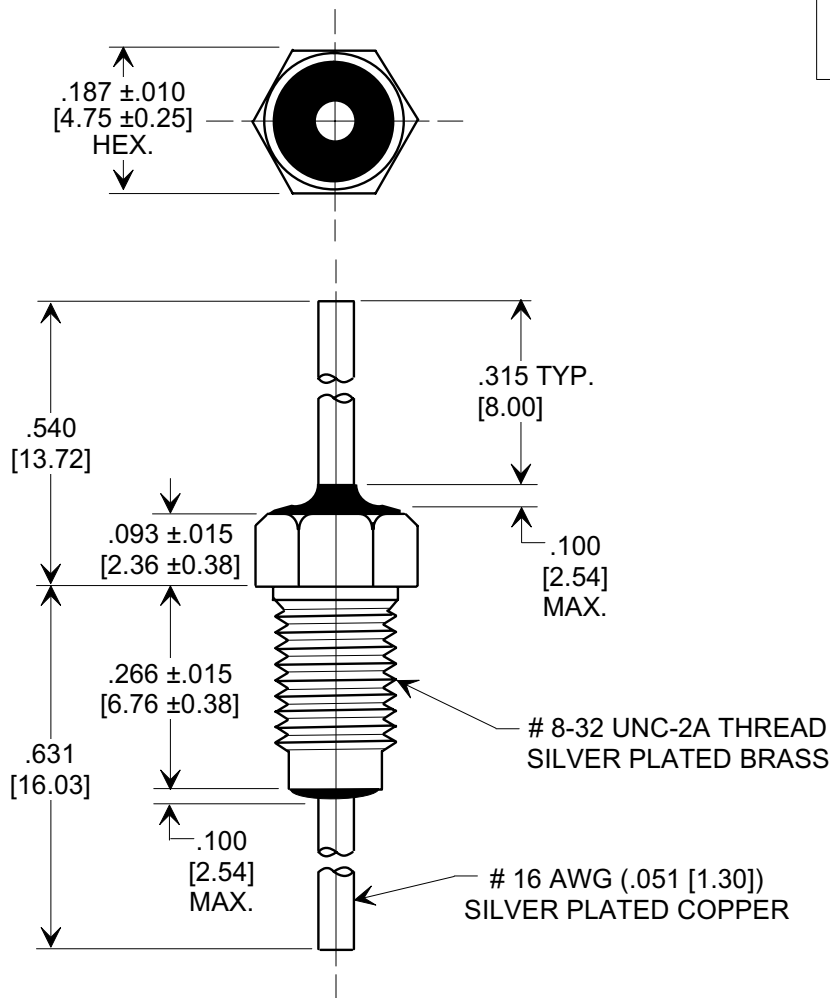



DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

**Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.**



TUSONIX STYLE:	2425-550
VALUE:	1000 pF
VALUE TOL.:	- 0%, +100%
TEMP. COEF.:	X7R
RATING:	100 VDC @ + 125°C
OPERATING RANGE:	-55°C TO +125°C
CURRENT (A)	20
INSULATION RESISTANCE:	10,000 MEGOHMS (MIN) @ 25 °C
DWV	600 VDC

1. SUPPLIED WITH SILVER PLATED HEX NUT AND LOCK WASHER.
2. MOUNTING TORQUE NOT TO EXCEED 5 lb-in MAX. [.565 N-m]
1. TUSONIX STANDARD PART NUMBER: 2425-550-X7R0-102P.
TUSONIX RoHS COMPLIANT PART NUMBER: 2425-550-X7R0-102P LF.
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
3. PART MARKING: STANDARD PART: BLACK INK FOR TRADEMARK AND CAP. CODE. RoHS PART: GREEN FOR TRADEMARK AND CAP CODE.

<div>REVISION RECORD</div> <div>Original Release C.O.</div> <div>WAS SK 8038-057 L.E. 11-08-02</div> <div>20021105-2-03 ADDED NOTES 2-4. S.M. 02-10-06</div> <div>20060109-5-06</div>		<div>--TOLERANCES-- Unless Otherwise Specified</div>	<div>Title</div> <div>MINIATURE BUSHING FEED-THRU</div>	
		<div>DECIMAL ± .031 [0.79]</div>		
		<div>ANGLES ± </div>	<div>Drawn</div> <div>S.M. 10-23-02</div>	<div>Scale</div> <div>4 X</div>
		<div>TUSONIX</div> <div>TUCSON, ARIZONA</div>	<div>Approved</div> <div>B.Mc. 10-23-02</div>	<div>A</div> <div>2425-550-X7R0-102P</div>