
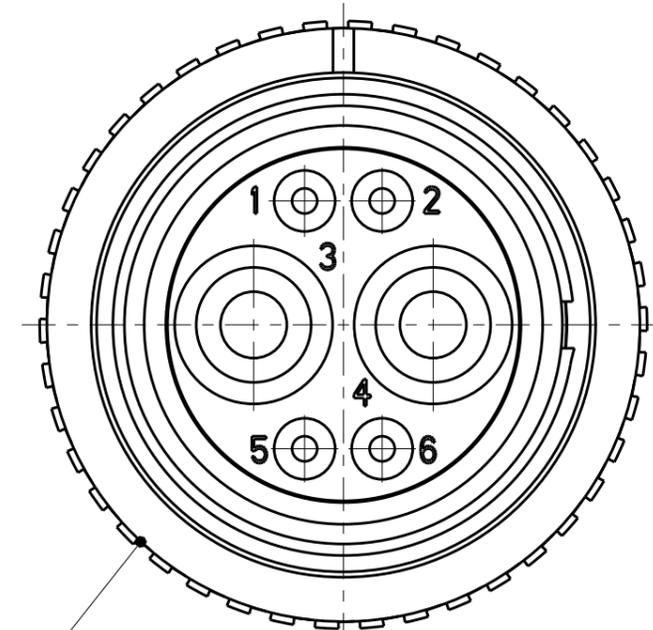
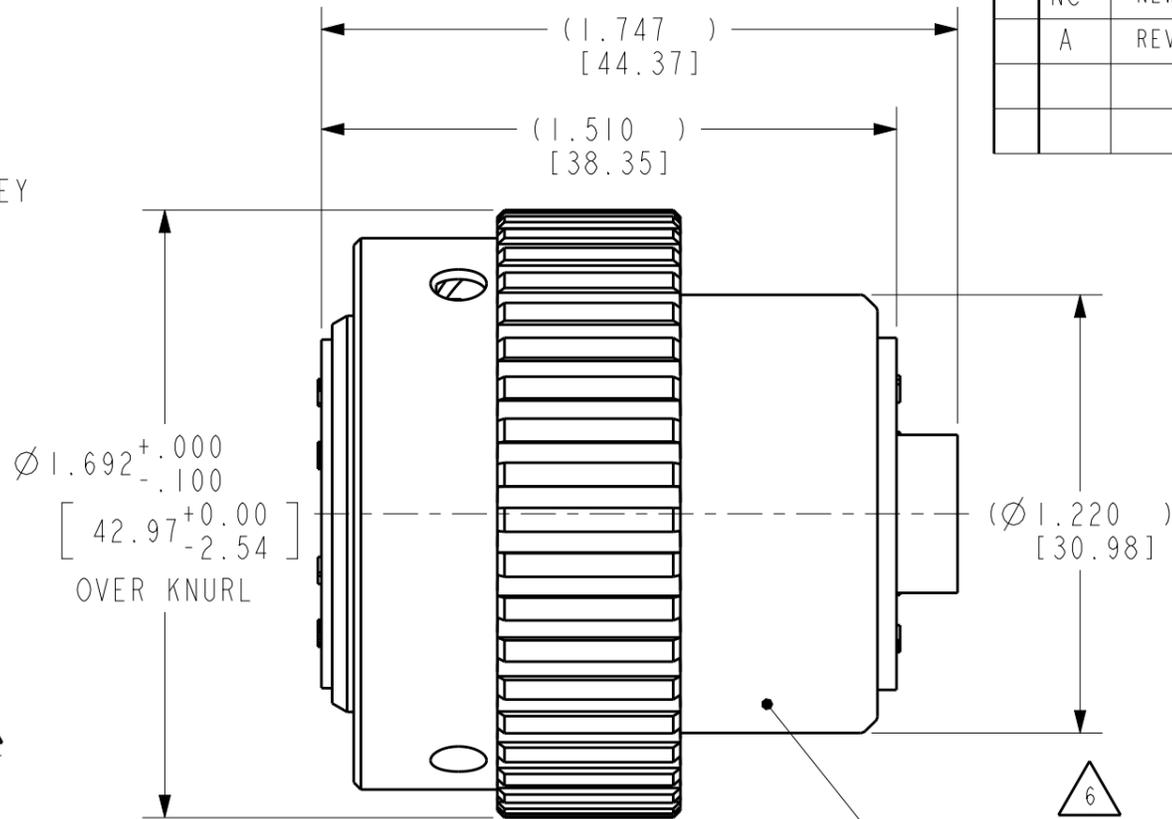


LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
-	-	NC	NEW RELEASE PER E.O. PI9718	21FEB2008	-	RDR
-	-	A	REVISED PER ECO-15-001798	19MAR2015	VNB	DM

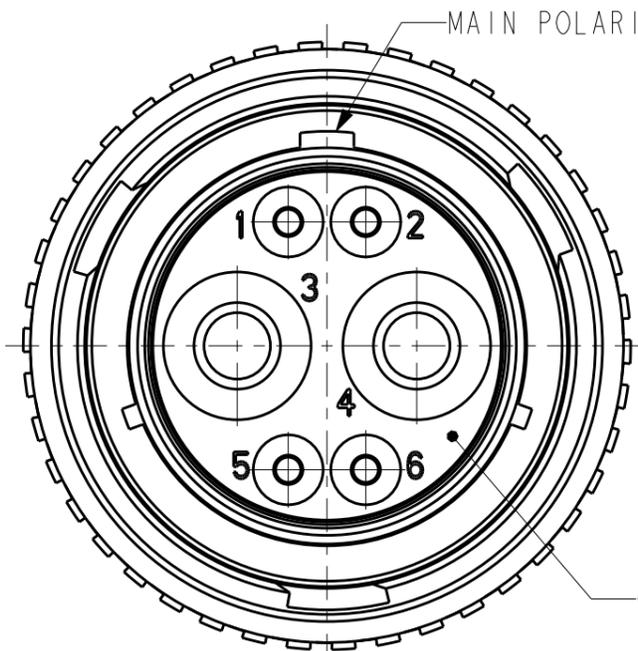

- 3. THIS CONNECTOR MATES WITH PART NO. HD34-18-6PX-XXXX. XXXX= ALL MODIFICATION, X= TYPE OF SEAL.
- 2. THIS CONNECTOR WILL ACCOMMODATE THE FOLLOWING WIRE INSULATION DIAMETERS:

4 SEAL TYPE	CONTACT SIZE	MIN INSULATION O.D.	MAX INSULATION O.D.	5 WIRE GAUGE AWG [mm ²] RANGE
N	16	.100 [2.54]	.134 [3.40]	14-20 [2.0-0.5mm ²]
E	16	.053 [1.35]	.120 [3.05]	14-20 [2.0-0.5mm ²]
N or E	4	.261 [6.63]	.292 [7.42]	6 [13mm ²]

- 6. MATERIAL:
 PLUG HOUSING: AL 6000 SERIES
 GROMMET: SILICONE VMQ (RED)
- 5. FOR CONTACTS AND WIRES PERFORMANCE AND APPLICATION CHARACTERISTICS SEE ENVELOPE DWG. 0425-015-0000.
- 4. WHEN X = N: NORMAL SEAL WHEN X = E: REDUCED DIAMETER E-SEAL

1. CONSULT FACTORY FOR ELECTRICAL AND MATERIAL SPECIFICATIONS.

NOTES:

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN X. SANCHEZ 27JUN2001	TE Connectivity	
DIMENSIONS: INCHES [mm]		CHK A. ROLINSKI 19JUL2001		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. BEARD 01AUG2001	NAME PLUG CONNECTOR 18-6 ARR. BAYONET COUPLING	
0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±.010 [±.254] 4 PLC ±- ANGLES ±° 30' 0"		PRODUCT SPEC 0425-016-0000	SIZE A3	
MATERIAL SEE NOTE		APPLICATION SPEC 0425-015-0000	CAGE CODE -	DRAWING NO. © HD36-18-6PX
		WEIGHT 54.92g	RESTRICTED TO -	
		Customer Drawing	SCALE NONE	SHEET 1 OF 1 REV A