

DC Connector, Plug, 6.3 mm, 2.00 mm, 2-pole, solder terminal

**Description**

- Solder terminal:
Screw-on mounting, from rear-side
- Low Voltage DC Plug and Socket
- DC Plug: 2-pole, straight

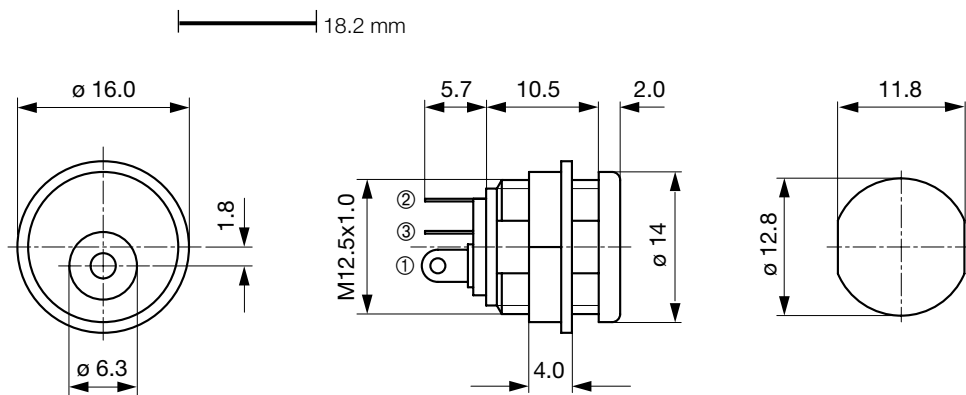

Weblinks

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

Technical Data

| | |
|-----------------------|-------------------|
| Diameter | 6.3 mm / 2.0 mm |
| Number of Poles | 2-pole |
| Ratings DC | 1 A / 12VDC |
| Dielectric Strength | 500VDC |
| Insulation Resistance | > 100 MΩ @ 500VDC |

| | |
|---------------------------|-------------------------------------------------|
| Allowable Operation Temp. | -20°C to 70°C |
| Terminal | solder terminal silver plated |
| Mounting | Screw-on mounting wall thickness max. 5.5 mm |
| Style | straight |
| Lifetime | 5000 Insertions |

Dimensions**Diagrams****Variants**

| Product group | Diameter [mm] | Number of Poles | Terminal | Order Number |
|----------------|---------------|-----------------|-----------------|--------------|
| DC Plug/Socket | 6.3 | 2-pole | solder terminal | 4840.2200 |

Packaging unit 250 Pcs

Mating Inlets/Plugs

Category / Description

[DC Plug/Socket Overview complete](#)



| | |
|--------------------------------------------------------------|-----------|
| DC Connector, Plug, 5.5x2.1 mm, 2-pole, solder terminal | 4840.1200 |
| DC Connector, Plug, 5.5x2.1 mm, 2-pole, straight, with cable | 4840.5200 |
| DC Connector, Plug, 5.5x2.1 mm, 2-pole, angled, with cable | 4840.5201 |

[DC Plug/Socket further types to 4840 DC-Stecker, verschiedene](#)