



RUBBER BOX
COLOR: YELLOW

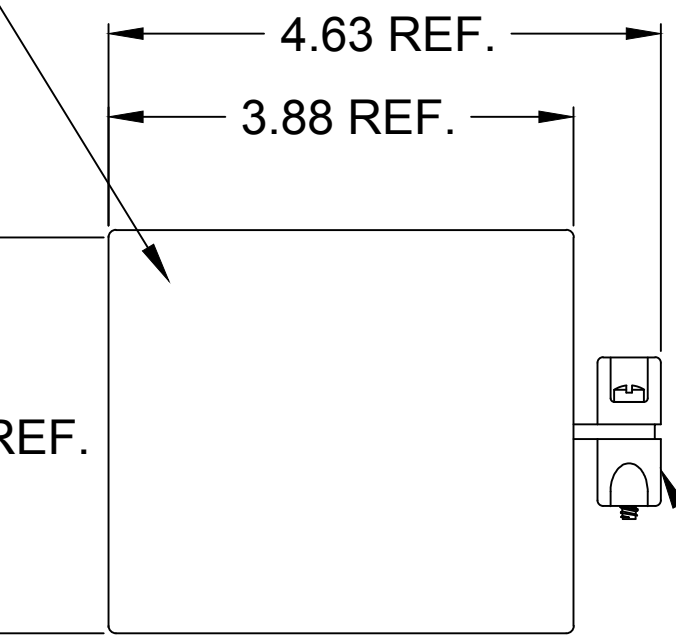


#12-3 SJTW
300V CORD
COLOR: YELLOW

NYLON CORD CLAMP
COLOR: YELLOW

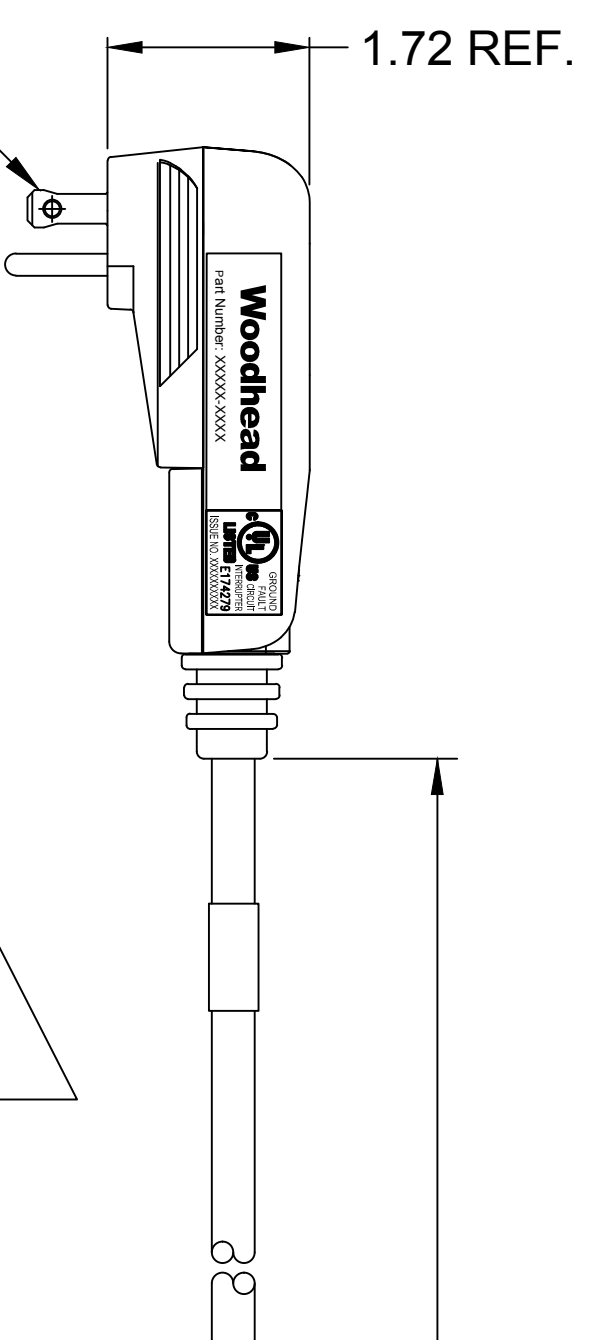

NEMA 5-15P PLUG

1.72 REF.

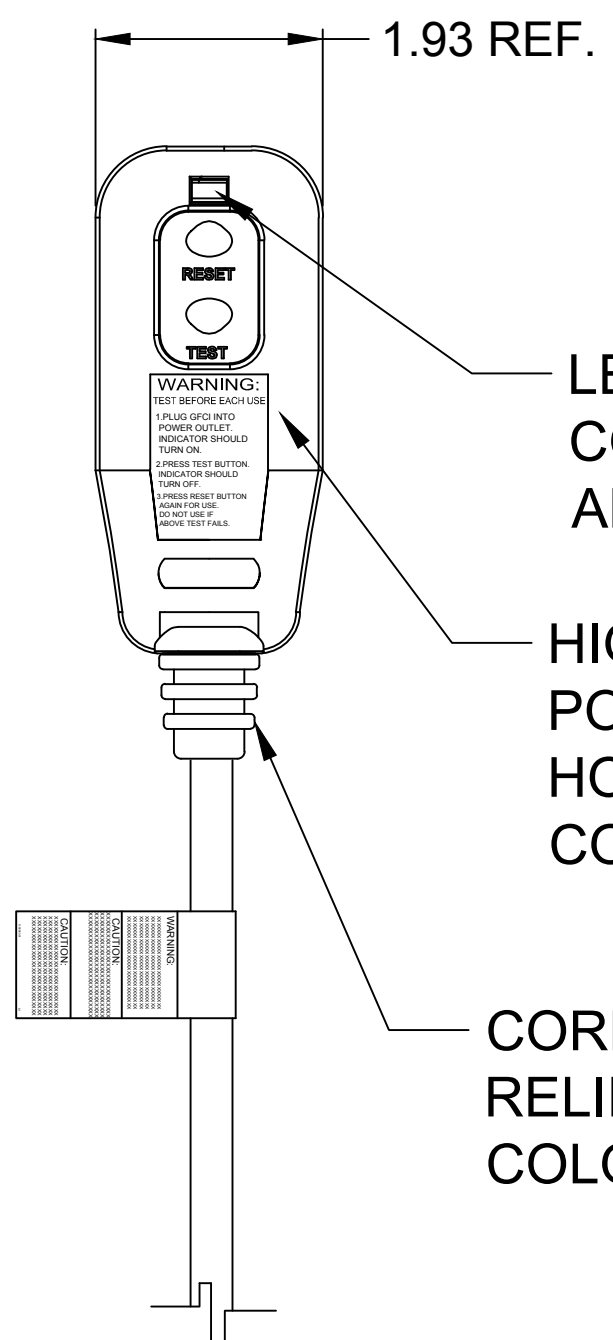


LED INDICATOR
CONFIRMS POWER
AND FAULT STATUS

HIGH STRENGTH
POLYCARBONATE
HOUSING
COLOR: BLACK

CORD STRAIN
RELIEF
COLOR: BLACK

1.93 REF.

NEMA 5-15
SUPER-SAFEWAY
DUAL-SIDED OUTLET BOX
PART# 3000-1

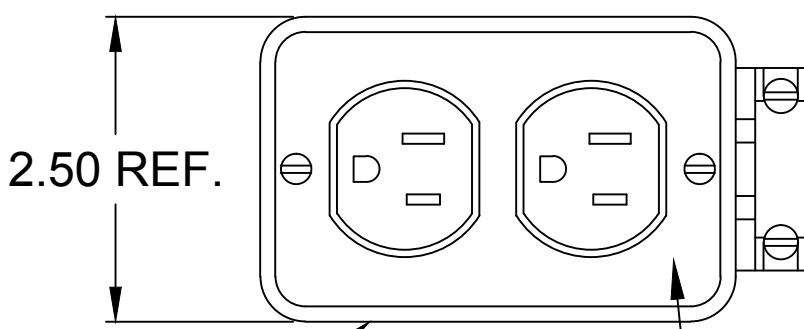

2.50 REF.

NYLON COVER PLATE
COLOR: YELLOW

LENGTH "L"

TECHNICAL:
LISTED: UL AND cUL
RATED SUPPLY VOLTAGE: 120 VAC
RATED CURRENT: UP TO 15 AMPS OR CABLE RATING
RESET TYPE: AUTOMATIC OR MANUAL
OPERATING FREQUENCY: 60 Hz
TYPE: CLASS A
GROUND TRIP CURRENT: 4-6 mA
OVERLOAD CURRENT: 90 AMP 125 VAC
INSULATION VOLTAGE: 1,500 VRMS – 1 MINUTE
ENDURANCE OPERATIONS: 3000 OPERATIONS

MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	POWER-UP
1301530075	15053-2A	2 FT ± 1 IN	AUTO
1301530073	15053-25A	25 FT ± 2 IN	AUTO
1301530078	15053-50A	50 FT ± 4 IN	AUTO
1301530076	15053-2M	2 FT ± 1 IN	MANUAL
1301530074	15053-25M	25 FT ± 2 IN	MANUAL
1301530079	15053-50M	50 FT ± 4 IN	MANUAL

INITIAL RELEASE EC NO: IPG2013-1078 DRWN: HRUIZ01 2013/02/08 CHKD: HKNEELAN 2014/07/22 APPR: JFMURPHY 2015/04/20	REV A	DESCRIPTION QUALITY SYMBOL ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE INCH		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY HRUIZ01	DATE 2013/02/08	TITLE 120V 15A GFCI PLUG W/ RCPT BOX NEMA 5-15		
			4 PLACES	±---	±---	CHECKED BY HKNEELAN	DATE 2014/07/22	MOLEX INCORPORATED		
			3 PLACES	±---	±.005	APPROVED BY JFMURPHY	DATE 2015/04/20		DOCUMENT NO. SD-130153-019	SHEET NO. 1 OF 1
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			2 PLACES	±0.13	±.010	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
			1 PLACE	±0.25	±.020					