

# CS8371

## 8.0 V/1.0 A, 5.0 V/250 mA Dual Regulator with Independent Output Enables and NOCAP™

The CS8371 is an 8.0 V/5.0 V dual output linear regulator. The 8.0 V  $\pm 5.0\%$  output sources 1.0 A, while the 5.0 V  $\pm 5.0\%$  output sources 250 mA. Each output is controlled by its own ENABLE lead. Setting the ENABLE input high turns on the associated regulator output. Holding both ENABLE inputs low puts the IC into sleep mode where current consumption is less than 10  $\mu$ A.

The regulator is protected against overvoltage, short-circuit and thermal runaway conditions. The device can withstand 45 V load dump transients making suitable for use in automotive environments. ON's proprietary NOCAP solution is the first technology which allows the output to be stable without the use of an external capacitor.

The CS8371 is available in a 7 lead TO-220 package with copper tab. The tab can be connected to a heatsink if necessary.


### Features

- Two Regulated Outputs
  - 8.0 V  $\pm 5.0\%$ ; 1.0 A
  - 5.0 V  $\pm 5.0\%$ ; 250 mA
- Independent ENABLE for Each Output
- Separate Sense Feedback Lead for 8.0 V Output
- $< 10 \mu$ A Sleep Mode Current
- Fault Protection
  - Overvoltage Shutdown
  - +45 V Peak Transient Voltage
  - Short Circuit
  - Thermal Shutdown
- CMOS Compatible, Low Current ENABLE Inputs
- Pb-Free Packages are Available\*




ON Semiconductor®

<http://onsemi.com>





TO-220  
SEVEN LEAD  
T SUFFIX  
CASE 821E



TO-220  
SEVEN LEAD  
TVA SUFFIX  
CASE 821J

### PIN CONNECTIONS AND MARKING DIAGRAM



Tab = GND  
Pin 1. ENABLE<sub>1</sub>  
2. ENABLE<sub>2</sub>  
3. V<sub>OUT2</sub>  
4. GND  
5. Sense  
6. V<sub>CC</sub>  
7. V<sub>OUT1</sub>

A = Assembly Location  
WL = Wafer Lot  
Y = Year  
WW = Work Week  
G = Pb-Free Package

### ORDERING INFORMATION

| Device       | Package                         | Shipping      |
|--------------|---------------------------------|---------------|
| CS8371ET7    | TO-220<br>STRAIGHT              | 50 Units/Rail |
| CS8371ET7G   | TO-220<br>STRAIGHT<br>(Pb-Free) | 50 Units/Rail |
| CS8371ETVA7  | TO-220<br>VERTICAL              | 50 Units/Rail |
| CS8371ETVA7G | TO-220<br>VERTICAL<br>(Pb-Free) | 50 Units/Rail |

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# CS8371

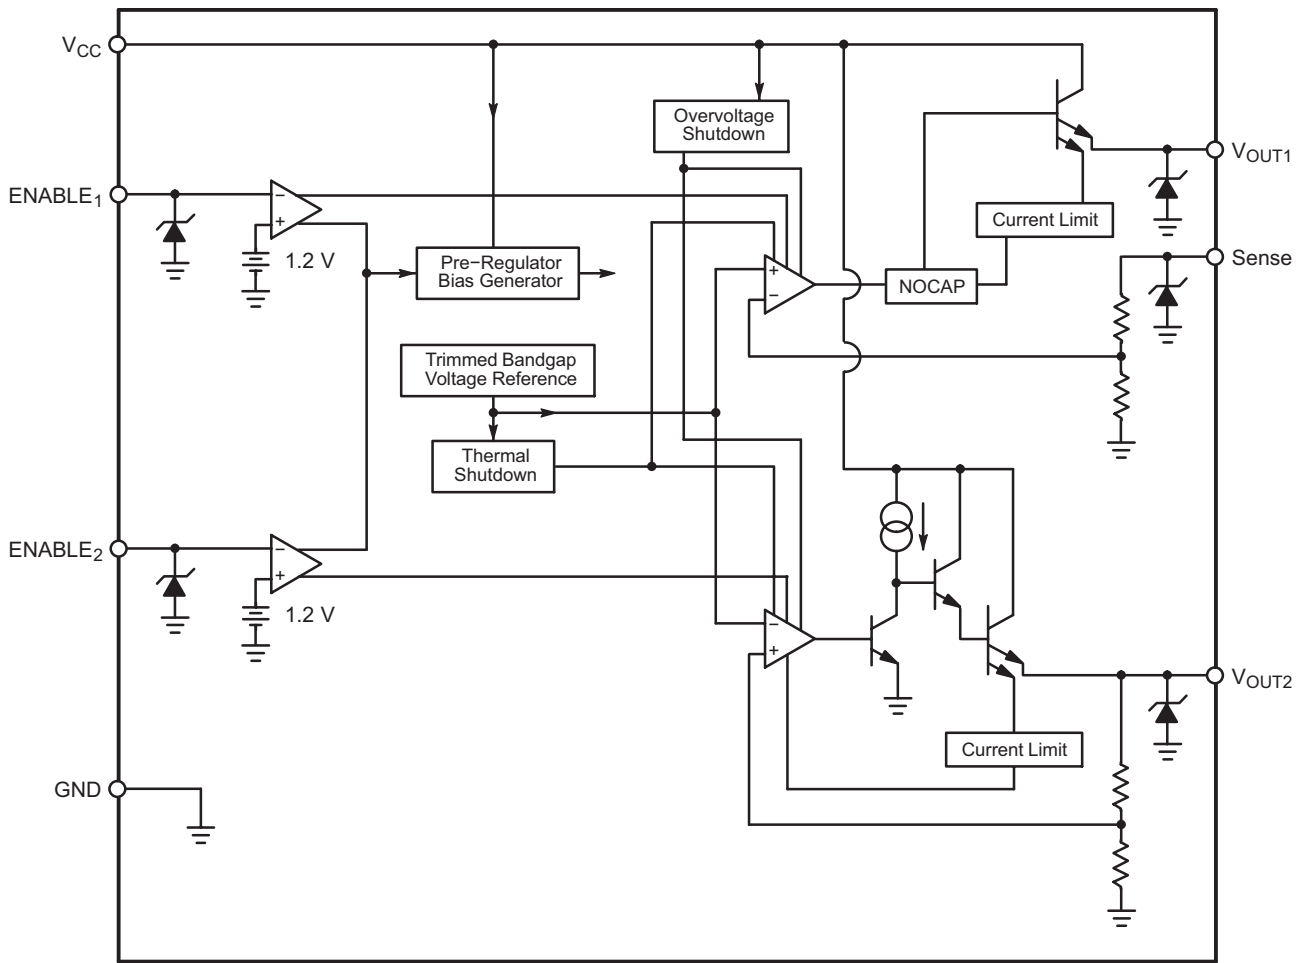


Figure 1. Block Diagram

## MAXIMUM RATINGS

| Rating  | Value              | Unit |
|---|--------------------|------|
| Power Dissipation   | Internally Limited | -    |
| ENABLE Input Voltage Range  | -0.6 to +10        | V    |
| Load Current (8.0 V Regulator)  | Internally Limited | -    |
| Load Current (5.0 V Regulator)  | Internally Limited | -    |
| Transient Peak Voltage (31 V Load Dump @ 14 V V <sub>CC</sub> )             | 45                 | V    |
| Storage Temperature Range   | -65 to +150        | °C   |
| Junction Temperature Range  | -40 to +150        | °C   |
| Lead Temperature Soldering: Wave Solder (through hole styles only) (Note 1) | 260 peak           | °C   |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. 10 second maximum.

# CS8371

**ELECTRICAL CHARACTERISTICS:** ( $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ ,  $10.5\text{ V} \leq V_{\text{CC}} \leq 16\text{ V}$ ,  $\text{ENABLE}_1 = \text{ENABLE}_2 = 5.0\text{ V}$ ,  $I_{\text{OUT}1} = I_{\text{OUT}2} = 5.0\text{ mA}$ , unless otherwise stated.)

| Characteristic                                       | Test Conditions   | Min  | Typ            | Max        | Unit                       |
|--|---|------|----------------|------------|----------------------------|
| <b>PRIMARY OUTPUT (<math>V_{\text{OUT}1}</math>)</b> |   |      |                |            |                            |
| Output Voltage                                       | $I_{\text{OUT}1} = 1.0\text{ A}$  | 7.60 | 8.00           | 8.40       | V                          |
| Line Regulation                                      | $10.5\text{ V} \leq V_{\text{CC}} \leq 26\text{ V}$   | -    | -              | 50         | mV                         |
| Load Regulation                                      | $5.0\text{ mA} \leq I_{\text{OUT}1} \leq 1.0\text{ A}$  | -    | -              | 150        | mV                         |
| Sleep Mode Quiescent Current                         | $V_{\text{CC}} = 14\text{ V}$ , $\text{ENABLE}_1 = \text{ENABLE}_2 = 0\text{ V}$  | 0    | 0.2            | 10.0       | $\mu\text{A}$              |
| Quiescent Current                                    | $V_{\text{CC}} = 14\text{ V}$ , $I_{\text{OUT}1} = 1.0\text{ A}$ , $I_{\text{OUT}2} = 250\text{ mA}$  | -    | -              | 30         | mA                         |
| Dropout Voltage                                      | $I_{\text{OUT}1} = 250\text{ mA}$<br>$I_{\text{OUT}1} = 1.0\text{ A}$   | -    | -              | 1.2<br>1.5 | V<br>V                     |
| Quiescent Bias Current                               | $I_{\text{OUT}1} = 5.0\text{ mA}$ , $\text{ENABLE}_2 = 0\text{ V}$ , $V_{\text{CC}} = 14\text{ V}$ ,<br>$I_Q = I_{\text{CC}} - I_{\text{OUT}1}$<br>$I_{\text{OUT}1} = 1.0\text{ A}$ , $\text{ENABLE}_2 = 0\text{ V}$ , $V_{\text{CC}} = 14\text{ V}$ ,<br>$I_Q = I_{\text{CC}} - I_{\text{OUT}1}$   | -    | -              | 10<br>22   | mA<br>mA                   |
| Ripple Rejection                                     | $f = 120\text{ Hz}$ , $V_{\text{CC}} = 14\text{ V}$ with $1.0\text{ V}_{\text{PP}}$ AC, $C_{\text{OUT}} = 0\text{ }\mu\text{F}$<br>$f = 10\text{ kHz}$ , $V_{\text{CC}} = 14\text{ V}$ with $1.0\text{ V}_{\text{PP}}$ AC, $C_{\text{OUT}} = 0\text{ }\mu\text{F}$<br>$f = 20\text{ kHz}$ , $V_{\text{CC}} = 14\text{ V}$ with $1.0\text{ V}_{\text{PP}}$ AC, $C_{\text{OUT}} = 0\text{ }\mu\text{F}$ | -    | 90<br>74<br>68 | -          | dB<br>dB<br>dB             |
| Current Limit  | $V_{\text{CC}} = 16\text{ V}$   | 1.1  | -              | 2.5        | A                          |
| Overshoot Voltage                                    | $5.0\text{ mA} \leq I_{\text{REG}1} \leq 1.0\text{ A}$  | -    | -              | 6.0        | V                          |
| Output Noise   | 10 Hz – 100 kHz   | -    | 300            | -          | $\mu\text{V}_{\text{rms}}$ |

## SECONDARY OUTPUT ( $V_{\text{OUT}2}$ )

|                        |   |      |                |            |                            |
|------------------------|---|------|----------------|------------|----------------------------|
| Output Voltage         | $I_{\text{OUT}2} = 250\text{ mA}$   | 4.75 | 5.00           | 5.25       | V                          |
| Line Regulation        | $7.0\text{ V} \leq V_{\text{CC}} \leq 26\text{ V}$  | -    | -              | 40         | mV                         |
| Load Regulation        | $5.0\text{ mA} \leq I_{\text{OUT}2} \leq 250\text{ mA}$   | -    | -              | 100        | mV                         |
| Dropout Voltage        | $I_{\text{OUT}2} = 5.0\text{ mA}$<br>$I_{\text{OUT}2} = 250\text{ mA}$  | -    | -              | 2.2<br>2.5 | V<br>V                     |
| Quiescent Bias Current | $I_{\text{OUT}2} = 5.0\text{ mA}$ , $\text{ENABLE}_1 = 0\text{ V}$ , $V_{\text{CC}} = 14\text{ V}$ ,<br>$I_Q = I_{\text{CC}} - I_{\text{OUT}2}$<br>$I_{\text{OUT}2} = 250\text{ mA}$ , $\text{ENABLE}_1 = 0\text{ V}$ , $V_{\text{CC}} = 14\text{ V}$ ,<br>$I_Q = I_{\text{CC}} - I_{\text{OUT}2}$  | -    | -              | 7.0<br>8.0 | mA<br>mA                   |
| Ripple Rejection       | $f = 120\text{ Hz}$ , $V_{\text{CC}} = 14\text{ V}$ with $1.0\text{ V}_{\text{PP}}$ AC, $C_{\text{OUT}} = 0\text{ }\mu\text{F}$<br>$f = 10\text{ kHz}$ , $V_{\text{CC}} = 14\text{ V}$ with $1.0\text{ V}_{\text{PP}}$ AC, $C_{\text{OUT}} = 0\text{ }\mu\text{F}$<br>$f = 20\text{ kHz}$ , $V_{\text{CC}} = 14\text{ V}$ with $1.0\text{ V}_{\text{PP}}$ AC, $C_{\text{OUT}} = 0\text{ }\mu\text{F}$ | -    | 90<br>75<br>67 | -          | dB<br>dB<br>dB             |
| Current Limit          | $V_{\text{CC}} = 16\text{ V}$   | 270  | -              | 600        | mA                         |
| Overshoot Voltage      | $5.0\text{ mA} \leq I_{\text{REG}2} \leq 250\text{ mA}$   | -    | -              | 4.3        | V                          |
| Output Noise           | 10 Hz – 100 kHz   | -    | 170            | -          | $\mu\text{V}_{\text{rms}}$ |

## ENABLE FUNCTION (ENABLE)

|               |   |          |        |            |               |
|---------------|---|----------|--------|------------|---------------|
| Input Current | $V_{\text{CC}} = 14\text{ V}$ , $0\text{ V} \leq \text{ENABLE} \leq 5.5\text{ V}$ | -150     | -      | 150        | $\mu\text{A}$ |
| Input Voltage | Low<br>High   | 0<br>2.0 | -<br>- | 0.8<br>5.0 | V<br>V        |

## PROTECTION CIRCUITRY

|                    |                      |           |           |    |                    |
|--------------------|----------------------|-----------|-----------|----|--------------------|
| ESD Threshold      | Human Body Model     | $\pm 2.0$ | $\pm 4.0$ | -  | kV                 |
| Overshoot Shutdown | -                    | 24        | -         | 30 | V                  |
| Thermal Shutdown   | Guaranteed by Design | 150       | 180       | -  | $^{\circ}\text{C}$ |
| Thermal Hysteresis | -                    | -         | 30        | -  | $^{\circ}\text{C}$ |

PACKAGE PIN DESCRIPTION

| PACKAGE LEAD # | LEAD SYMBOL         | FUNCTION                                     |
|----------------|---------------------|--|
| 7 Lead TO-220  |                     |  |
| 1              | ENABLE <sub>1</sub> | ENABLE control for the 8.0 V, 1.0 A output.  |
| 2              | ENABLE <sub>2</sub> | ENABLE control for the 5.0 V, 250 mA output. |
| 3              | V <sub>OUT2</sub>   | 5.0 V ±5.0%, 250 mA regulated output.        |
| 4              | GND                 | Ground.                                      |
| 5              | Sense               | Sense feedback for the primary 8.0 V output. |
| 6              | V <sub>CC</sub>     | Supply voltage, usually from battery.        |
| 7              | V <sub>OUT1</sub>   | 8.0 V ±5.0%, 1.0 A regulated output.         |

TYPICAL PERFORMANCE CHARACTERISTICS

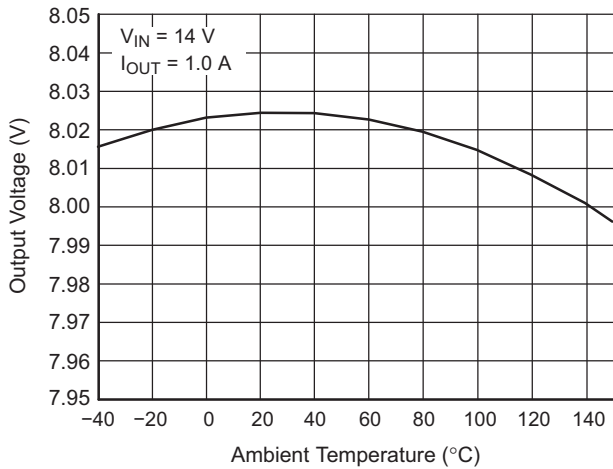


Figure 2. Regulator 1 Output Voltage

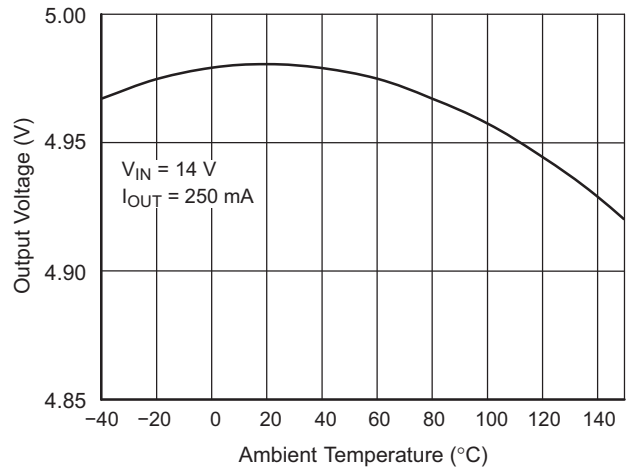


Figure 3. Regulator 2 Output Voltage

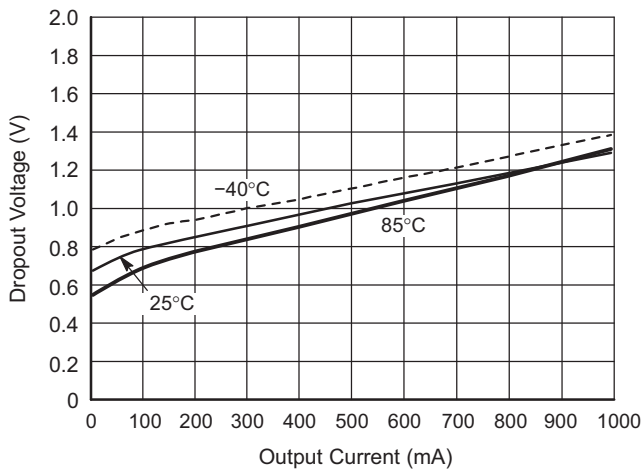


Figure 4. Regulator 1 Dropout Voltage

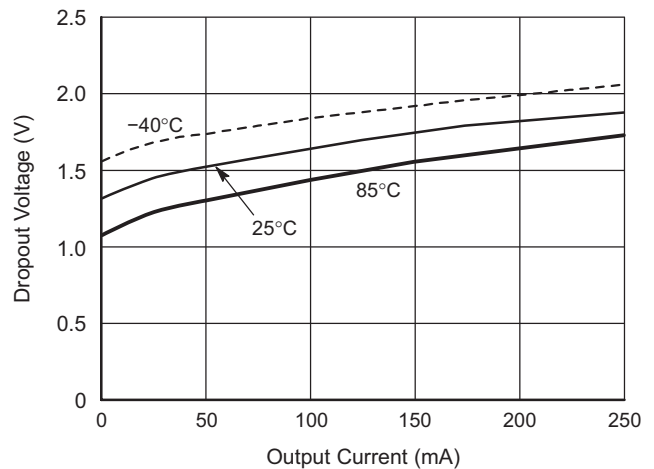


Figure 5. Regulator 2 Dropout Voltage

TYPICAL PERFORMANCE CHARACTERISTICS

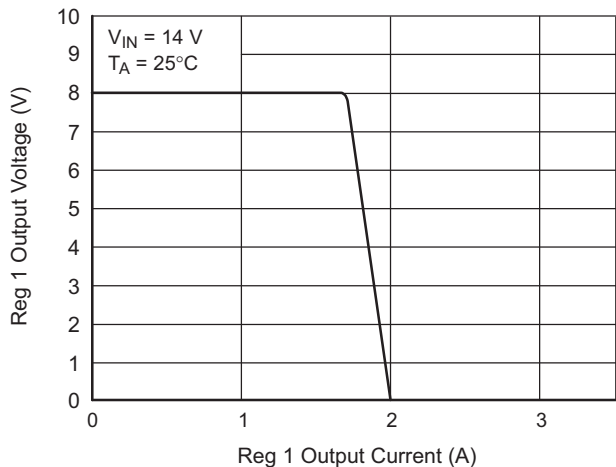


Figure 6. Regulator 1 Current Limit

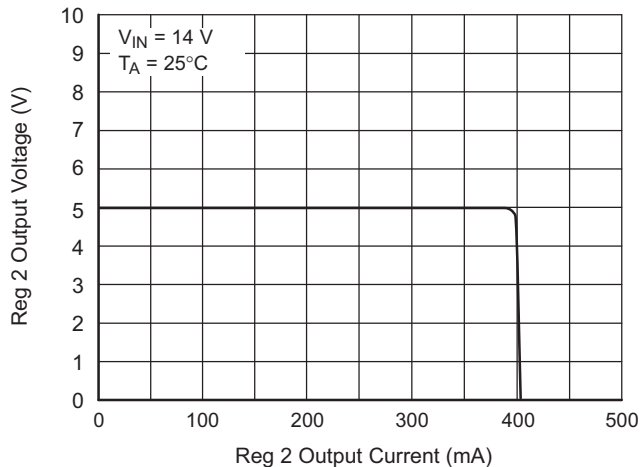


Figure 7. Regulator 2 Current Limit

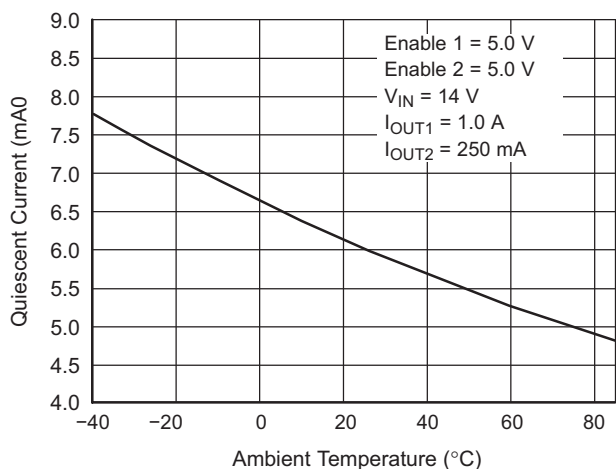


Figure 8. Quiescent Current

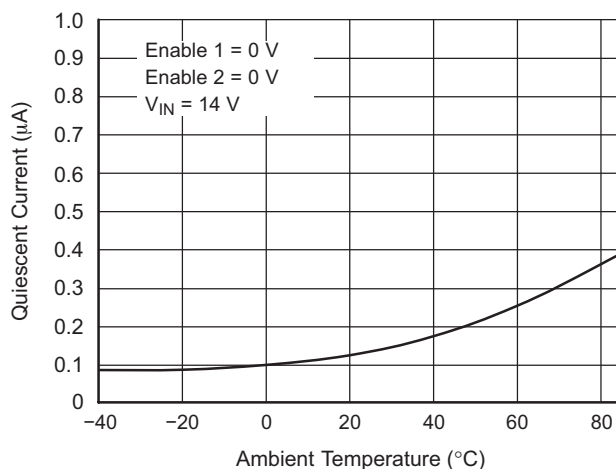


Figure 9. Quiescent Current

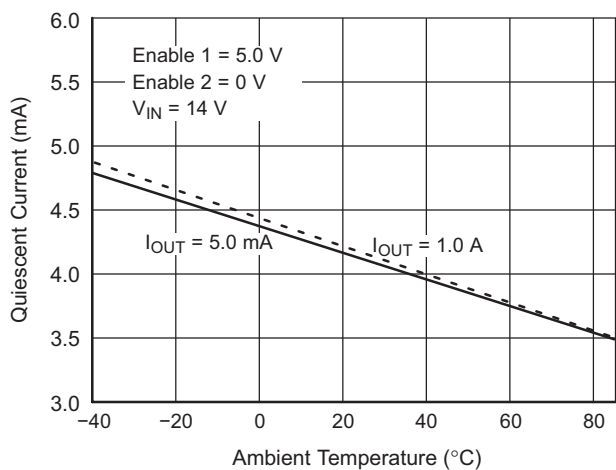


Figure 10. Regulator 1 Quiescent Current

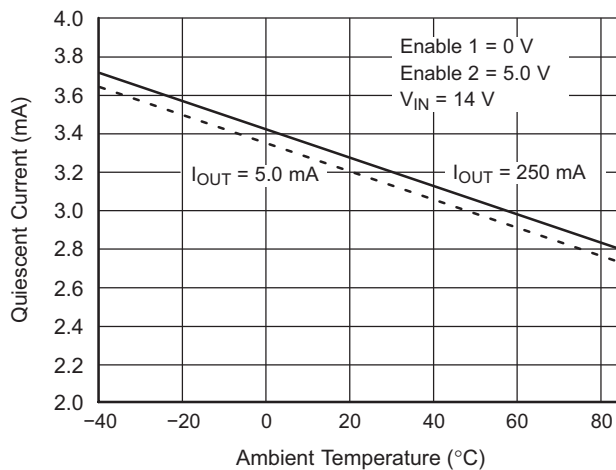


Figure 11. Regulator 2 Quiescent Current

TYPICAL PERFORMANCE CHARACTERISTICS

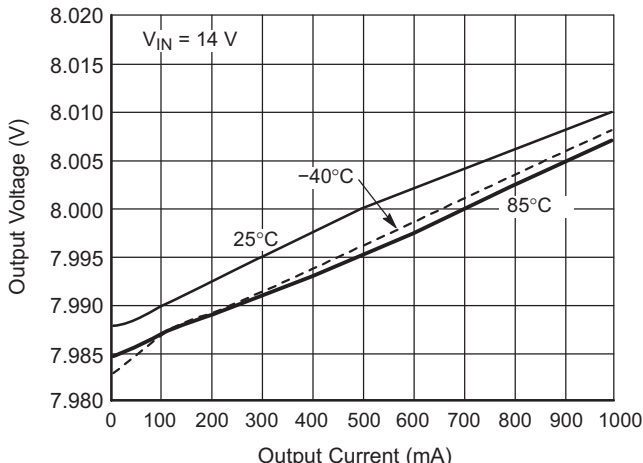


Figure 12. Regulator 1 Load Regulation

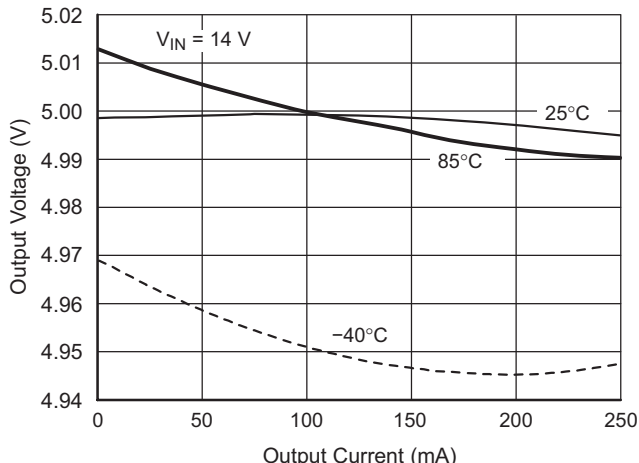


Figure 13. Regulator 2 Load Regulation

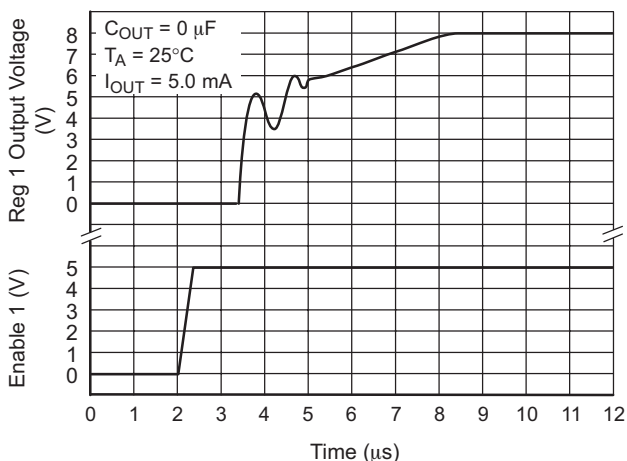


Figure 14. Regulator 1 Startup

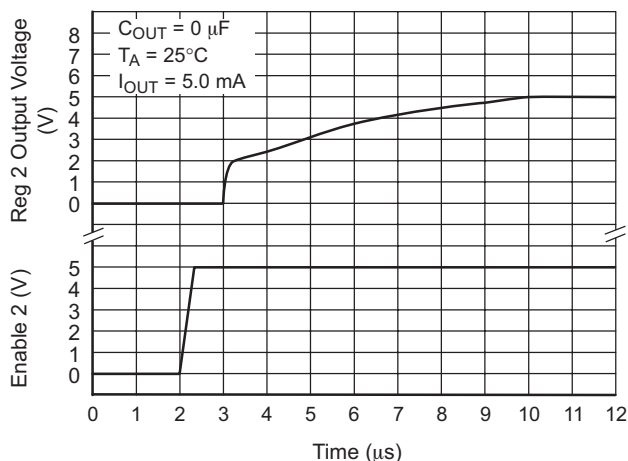


Figure 15. Regulator 2 Startup

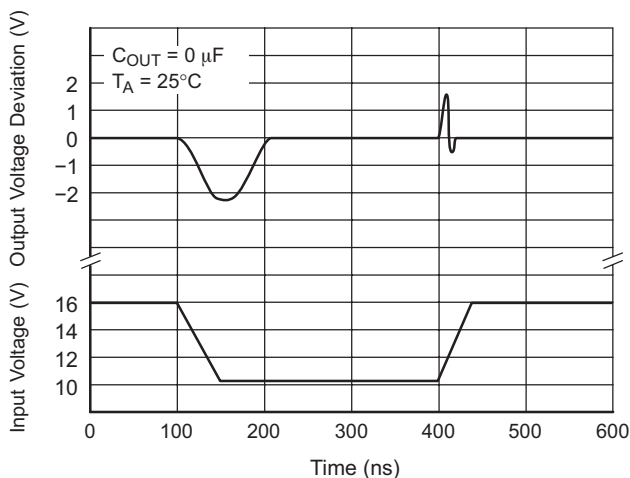


Figure 16. Regulator 1 Line Transient Response

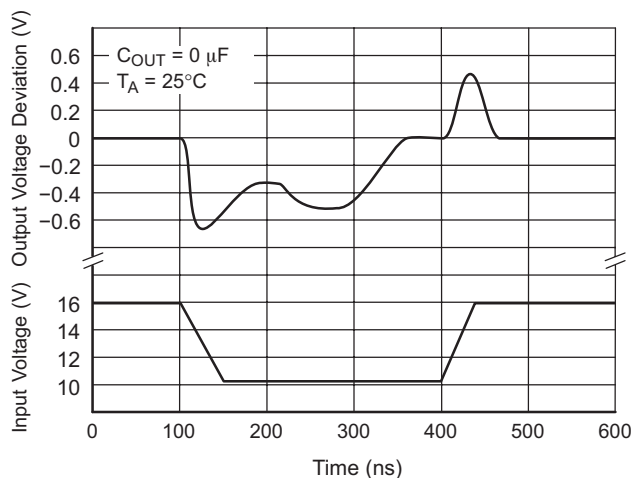


Figure 17. Regulator 2 Line Transient Response

TYPICAL PERFORMANCE CHARACTERISTICS

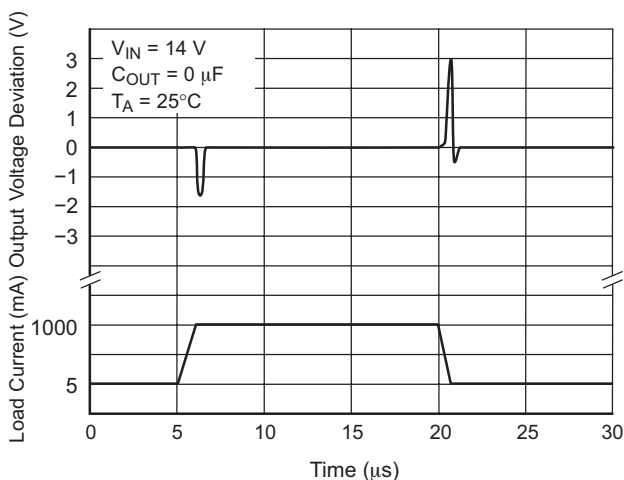


Figure 18. Regulator 1 Load Transient Response

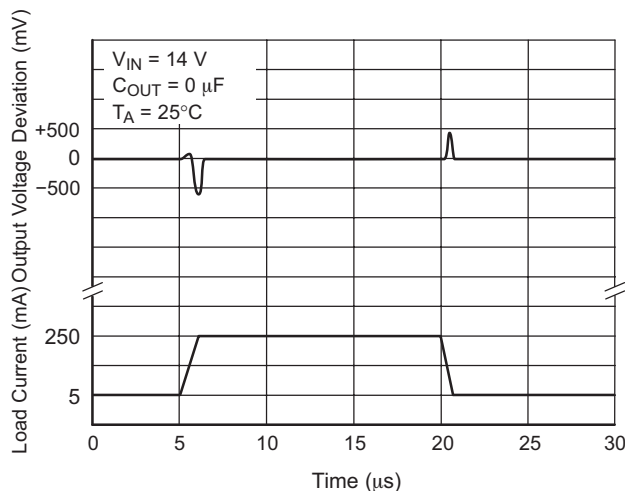


Figure 19. Regulator 2 Load Transient Response

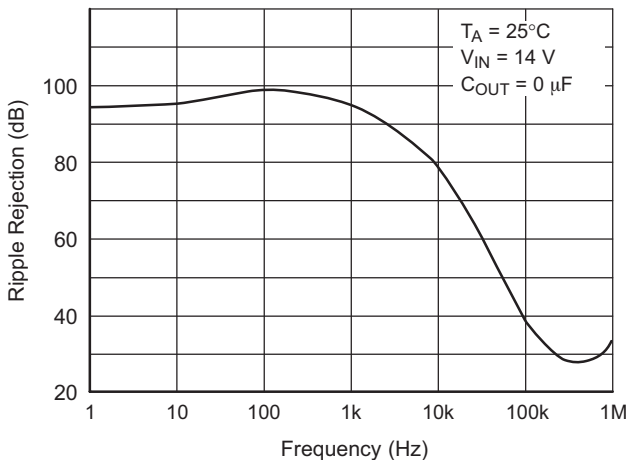


Figure 20. Regulator 1 Ripple Rejection

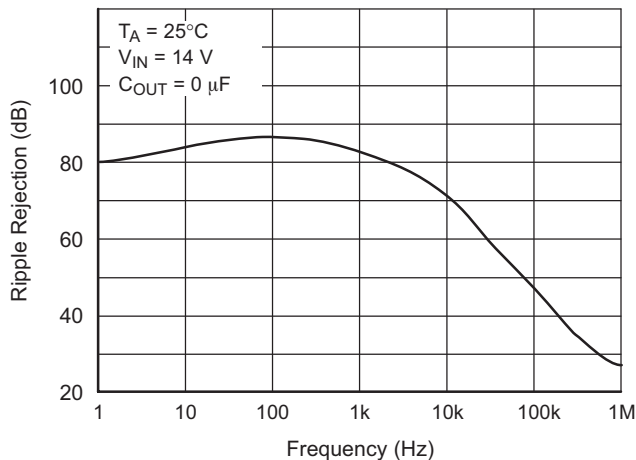


Figure 21. Regulator 2 Ripple Rejection

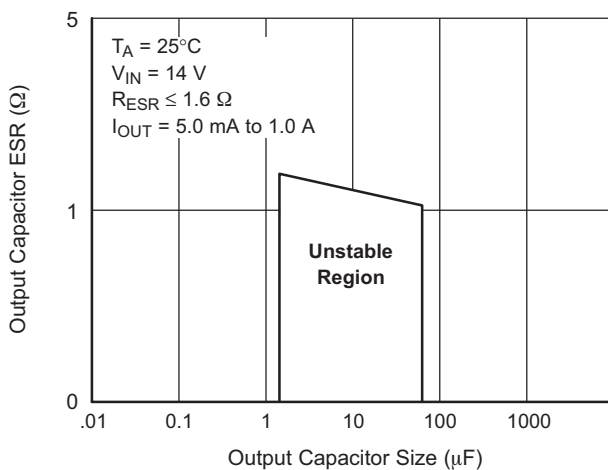


Figure 22. Regulator 1 Stability

## DEFINITION OF TERMS

**Dropout Voltage** – The input–output voltage differential at which the circuit ceases to regulate against further reduction in input voltage. Measured when the output voltage has dropped 100 mV from the nominal value obtained at 14 V input, dropout voltage is dependent upon load current and junction temperature.

**Current Limit** – Peak current that can be delivered to the output.

**Input Voltage** – The DC voltage applied to the input terminals with respect to ground.

**Input Output Differential** – The voltage difference between the unregulated input voltage and the regulated output voltage for which the regulator will operate.

**Line Regulation** – The change in output voltage for a change in the input voltage. The measurement is made under conditions of low dissipation or by using pulse techniques such that the average chip temperature is not significantly affected.

**Load Regulation** – The change in output voltage for a change in load current at constant chip temperature.


**Long Term Stability** – Output voltage stability under accelerated life–test conditions after 1000 hours with maximum rated voltage and junction temperature.

**Output Noise Voltage** – The rms AC voltage at the output, with constant load and no input ripple, measured over a specified frequency range.

**Quiescent Current** – The part of the positive input current that does not contribute to the positive load current. The regulator ground lead current.

**Ripple Rejection** – The ratio of the peak–to–peak input ripple voltage to the peak–to–peak output ripple voltage.

**Temperature Stability of  $V_{OUT}$**  – The percentage change in output voltage for a thermal variation from room temperature to either temperature extreme.

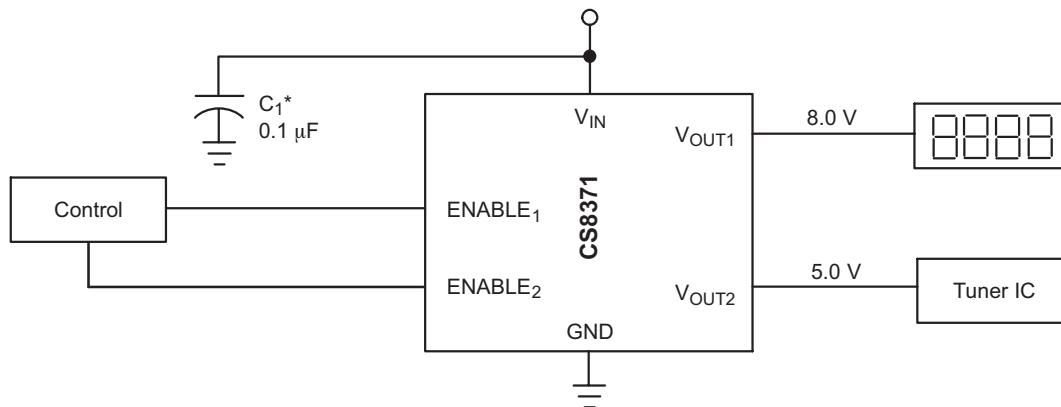

\*  $C_1$  is required if the regulator is far from the power source filter.

Figure 23. Applications Circuit

## APPLICATION NOTES

With separate control of each output channel, the CS8371 is ideal for applications where each load must be switched independently. In an automotive radio, the 8.0 V output drives the displays and tape drive motors while the 5.0 V output supplies the Tuner IC and memory.

**Stability Considerations/NOCAP**

Normally a low dropout or quasi–low dropout regulator (or any type requiring a slow lateral PNP in the control loop) necessitates a large external compensation capacitor at the output of the IC. The external capacitor is also used to curtail overshoot, determine startup delay time and load transient response.

Traditional LDO regulators typically have low unity gain bandwidth, display overshoot and poor ripple rejection. Compensation is also an issue because the high frequency

load capacitor value, ESR (Equivalent Series Resistance) and board layout parasitics all can create oscillations if not properly accounted for.

NOCAP is an ON Semiconductor exclusive output stage which internally compensates the LDO regulator over temperature, load and line variations without the need for an expensive external capacitor. It incorporates high gain (>80 dB) and large unity gain bandwidth (>100 kHz) while maintaining many of the characteristics of a single–pole amplifier (large phase margin and no overshoot).

NOCAP is ideally suited for slow switching or steady loads. If the load displays large transient current requirements, such as with high frequency microprocessors, an output storage capacitor may be needed. Some large capacitor and small capacitor ESR values at the output may



cause small signal oscillations at the output. This will depend on the load conditions. With these types of loads, a traditional output stage may be better suited for proper operation.

Output 1 employs NOCAP. Refer to the plots in the Typical Performance Characteristics section for appropriate output capacitor selections for stability if an external capacitor is required by the switching characteristics of the load. Output 2 has a Darlington NPN-type output structure and is inherently stable with any type of capacitive load or no capacitor at all.

**Calculating Power Dissipation in a Dual Output Linear Regulator**

The maximum power dissipation for a dual output regulator (Figure 24) is

$$P_{D(max)} = [V_{IN(max)} - V_{OUT1(min)}]I_{OUT1(max)} + [V_{IN(max)} - V_{OUT2(min)}]I_{OUT2(max)} + V_{IN(max)}I_Q \quad (1)$$

where:


- $V_{IN(max)}$  is the maximum input voltage,
- $V_{OUT1(min)}$  is the minimum output voltage from  $V_{OUT1}$ ,
- $V_{OUT2(min)}$  is the minimum output voltage from  $V_{OUT2}$ ,
- $I_{OUT1(max)}$  is the maximum output current, for the application,
- $I_{OUT2(max)}$  is the maximum output current, for the application, and
- $I_Q$  is the quiescent current the regulator consumes at  $I_{OUT(max)}$ .

Once the value of  $P_{D(max)}$  is known, the maximum permissible value of  $R_{\theta JA}$  can be calculated:

$$R_{\theta JA} = \frac{150^{\circ}C - T_A}{P_D} \quad (2)$$

The value of  $R_{\theta JA}$  can be compared with those in the package section of the data sheet. Those packages with  $R_{\theta JA}$ 's less than the calculated value in equation 2 will keep the die temperature below 150°C.

In some cases, none of the packages will be sufficient to dissipate the heat generated by the IC, and an external heatsink will be required.

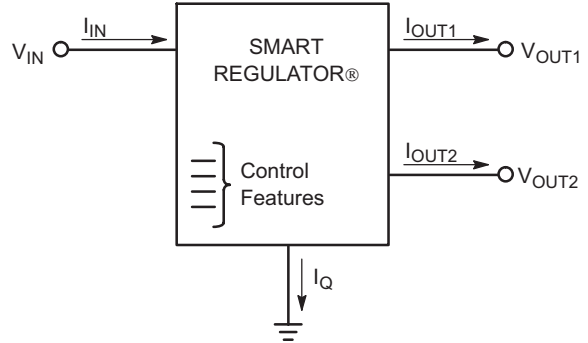

**Figure 24. Dual Output Regulator With Key Performance Parameters Labeled.**

**Heat Sinks**

A heat sink effectively increases the surface area of the package to improve the flow of heat away from the IC and into the surrounding air.

Each material in the heat flow path between the IC and the outside environment will have a thermal resistance. Like series electrical resistances, these resistances are summed to determine the value of  $R_{\theta JA}$ :

$$R_{\theta JA} = R_{\theta JC} + R_{\theta CS} + R_{\theta SA} \quad (3)$$

where:

- $R_{\theta JC}$  = the junction-to-case thermal resistance,
- $R_{\theta CS}$  = the case-to-heatsink thermal resistance, and
- $R_{\theta SA}$  = the heatsink-to-ambient thermal resistance.

$R_{\theta JC}$  appears in the package section of the data sheet. Like  $R_{\theta JA}$ , it too is a function of package type.  $R_{\theta CS}$  and  $R_{\theta SA}$  are functions of the package type, heatsink and the interface between them. These values appear in heat sink data sheets of heat sink manufacturers.


**PACKAGE THERMAL DATA**

| Parameter       |         | TO-220 SEVEN LEAD | Unit |
|-----------------|---------|-------------------|------|
| $R_{\theta JC}$ | Typical | 2.4               | °C/W |
| $R_{\theta JA}$ | Typical | 50                | °C/W |

# CS8371

## PACKAGE DIMENSIONS


7 LEAD, TO-220  
T SUFFIX  
CASE 821E-04  
ISSUE D

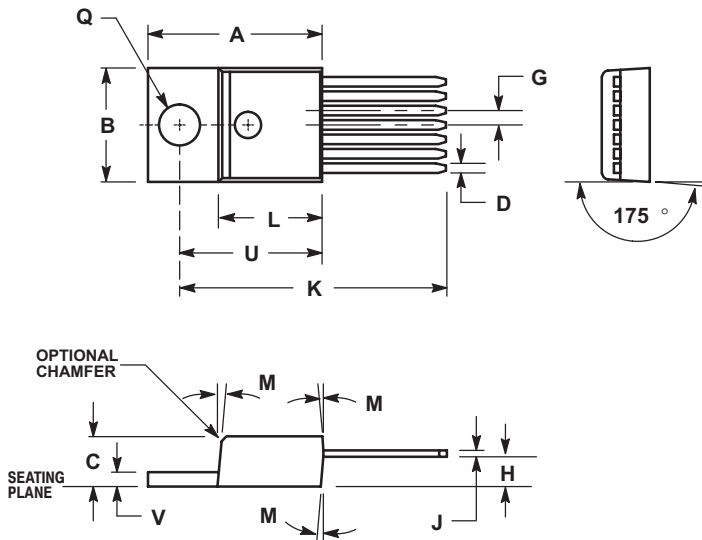

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.
  3. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE PROTRUSION SHALL BE 0.003 (0.076) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.
  4. 821E-01 THRU 821-03 OBSOLETE, NEW STANDARD 821E-04.

| DIM | INCHES |       | MILLIMETERS |       |
|-----|--------|-------|-------------|-------|
|     | MIN    | MAX   | MIN         | MAX   |
| A   | 0.600  | 0.610 | 15.24       | 15.49 |
| B   | 0.386  | 0.403 | 9.80        | 10.23 |
| C   | 0.170  | 0.180 | 4.32        | 4.56  |
| D   | 0.028  | 0.037 | 0.71        | 0.94  |
| G   | 0.045  | 0.055 | 1.15        | 1.39  |
| H   | 0.088  | 0.102 | 2.24        | 2.59  |
| J   | 0.018  | 0.026 | 0.46        | 0.66  |
| K   | 1.028  | 1.042 | 26.11       | 26.47 |
| L   | 0.355  | 0.365 | 9.02        | 9.27  |
| M   | 5° NOM |       | 5° NOM      |       |
| Q   | 0.142  | 0.148 | 3.61        | 3.75  |
| U   | 0.490  | 0.501 | 12.45       | 12.72 |
| V   | 0.045  | 0.055 | 1.15        | 1.39  |

7 LEAD, TO-220  
TVA SUFFIX  
CASE 821J-02  
ISSUE A

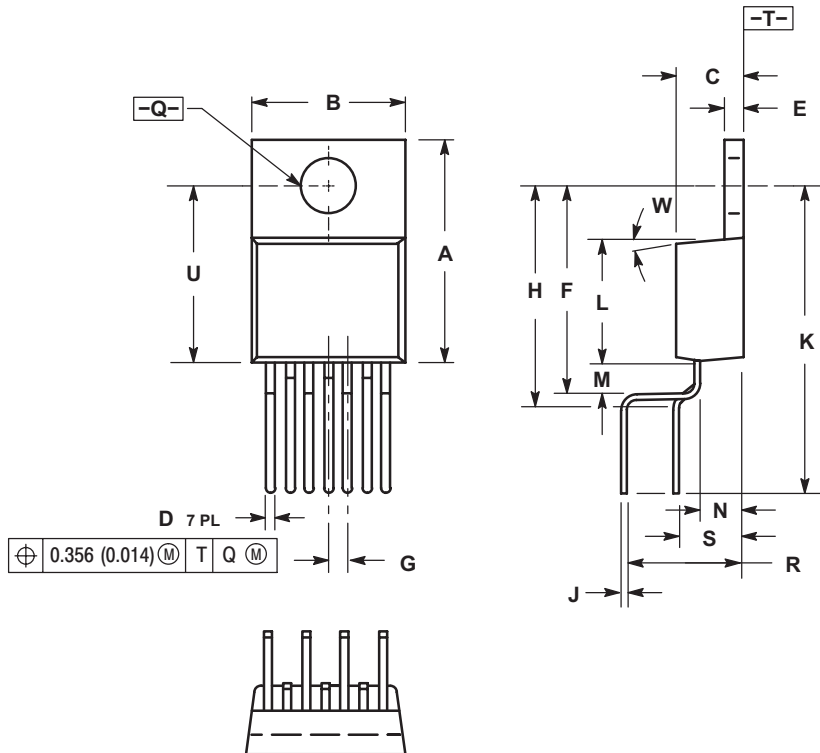

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.
  3. DIMENSION D DOES NOT INCLUDE INTERCONNECT BAR (DAMBAR) PROTRUSION. DIMENSION D INCLUDING PROTRUSION SHALL NOT EXCEED 10.92 (0.043) MAXIMUM.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.560     | 0.590 | 14.22       | 14.99 |
| B   | 0.385     | 0.415 | 9.77        | 10.54 |
| C   | 0.160     | 0.190 | 4.06        | 4.82  |
| D   | 0.023     | 0.037 | 0.58        | 0.94  |
| E   | 0.045     | 0.055 | 1.14        | 1.40  |
| F   | 0.540     | 0.555 | 13.72       | 14.10 |
| G   | 0.050 BSC |       | 1.27 BSC    |       |
| H   | 0.570     | 0.595 | 14.48       | 15.11 |
| J   | 0.014     | 0.022 | 0.36        | 0.56  |
| K   | 0.785     | 0.800 | 19.94       | 20.32 |
| L   | 0.322     | 0.337 | 8.18        | 8.56  |
| M   | 0.073     | 0.088 | 1.85        | 2.24  |
| N   | 0.090     | 0.115 | 2.28        | 2.91  |
| Q   | 0.146     | 0.156 | 3.70        | 3.95  |
| R   | 0.289     | 0.304 | 7.34        | 7.72  |
| S   | 0.164     | 0.179 | 4.17        | 4.55  |
| U   | 0.460     | 0.475 | 11.68       | 12.07 |
| W   | 3°        |       | 3°          |       |

NOCAP is a trademark of Semiconductor Components Industries, LLC (SCILLC).

SMART REGULATOR are registered trademarks of Semiconductor Components Industries, LLC (SCILLC).

**ON Semiconductor** and **ON** are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5773-3850

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)  
**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative



Поставка электронных компонентов

**Юридический адрес организации:**  
198099, г. Санкт-Петербург, ул. Калинина, дом 2, кор. 4, лит А.  
**Фактический адрес организации:**  
198099, г. Санкт-Петербург, ул. Калинина, дом 2, кор. 4, лит А.  
ИНН 780277764  
КПП 780501001  
Р/С 40702810422510004035 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в Санкт-Петербурге К/С 30101810900000000703  
БИК 044030703  
**Телефон:** 8 (812) 309-44-11 (многоканальный)  
**Факс:** 8 (812) 309-44-11  
**Электронная почта:** [sales@timechips.ru](mailto:sales@timechips.ru)  
**Сайт:** [timechips.ru](http://timechips.ru)

## Информационное письмо

Компания «ТаймЧипс» - одна из наиболее динамично развивающихся компаний в сфере поставок электронных компонентов. Мы поставляем широкую номенклатуру электронных компонентов отечественных и импортных производителей, как напрямую, так и с крупных мировых складов, позволяющих охватить выборочную номенклатуру более 300 брендов, а также специализируемся на поставках дисплеев и является официальным дистрибьютором компании Shenzhen Startek Electronic Technology Co, на территории Российской Федерации.

Наличие собственной логистики позволяет в кратчайшие сроки доставлять товар нашим клиентам. В нашей компании имеется Конструкторский отдел, где наши специалисты проводят технические консультации клиентов, квалифицированную поддержку и помощь российским разработчикам. Осуществляем Поставки импортной продукции под контролем ВП МО РФ, на предприятия Оборонно-промышленного комплекса России. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001-2011.

Благодаря нацеленности на результат, мы уверенно занимаем новые позиции на рынке, заинтересовывая Клиента не только актуальными ценами и гибким подходом, но и постоянным вниманием.

**Миссия** – обеспечение долгосрочного и взаимовыгодного партнерства с клиентами.

**Наша цель** – Обеспечение клиентам самого широкого ассортимента электронных компонентов и бесперебойности поставок.

**Мы - это развитие! Мы задаем темп! Мы разные, но вместе! Мы работаем для вас!**

Так же имеем прямые поставки от производителей:

TAI-SAW Пав-компоненты ([www.taisaw.com](http://www.taisaw.com))

TRANSCOM СВЧ-компоненты ([www.transcominc.com.tw](http://www.transcominc.com.tw))

Mini Circuits ВЧ-СВЧ-компоненты ([minicircuits.com](http://minicircuits.com))

SAMTEC- разъемы ([www.samtec.com](http://www.samtec.com))

4Star Разъемы РЧ (Даташиты по продукции 4Star, которые Вы сможете загрузить по этой ссылке: <https://yadi.sk/i/tPjnmGGrpmbYj>)

ULNION Преобразователи напряжения ([converterdc.com/](http://converterdc.com/))

**Отличные рекомендации на рынке, уверенность в качестве поставляемой продукции делают нас надежными партнерами для наших клиентов.**

**«ТаймЧипс» - это:**

- Гарантия качества поставляемой продукции;
- Широкий ассортимент;
- Минимальные сроки поставок;
- Техническая поддержка;
- Подбор комплектации;
- Индивидуальный подход;
- Гибкие цены.

**Модули, микросхемы, пассивные компоненты, Xilinx (XC), Altera (EP,EPF, EPM) и силовая электроника** – это наши ведущие позиции, на поставку которых мы гарантированно дадим Вам самые выгодные предложения!

**В структуру компании так же входит конструкторский отдел, который помогает разработчикам и конструкторам в решении следующих задач:**

- Оценка стоимости проекта по компонентам;
- Подбор оптимального решения при выборе компонента;
- Подбор аналогов;
- Техническая поддержка;
- Консультации у производителей;
- Поставка прототипов;

*С Уважением, Чернов Павел.*

*Руководитель отдела продаж ООО "ТАЙМЧИПС"*

*Официальный дистрибьютор Shenzhen Startek Electronic Technology Co.,Ltd в России (USB Display Modules , LED Displays, Serial Modules).*

<http://www.timechips.ru/>

<http://lcd-timechips.ru/>

**Телефон: +7 (812) 309-44-11 доб. 141**

**Факс: +7 (812) 309-44-11 доб. 152**

**Моб. Тел. +7 (905) 232-40-65**

**Skype: time.chips5**

**Электронная почта: [manager1@timechips.ru](mailto:manager1@timechips.ru)**

---