

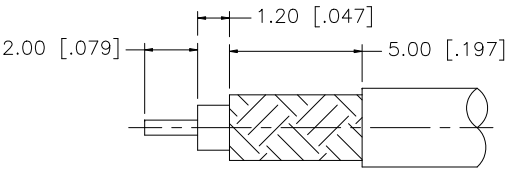
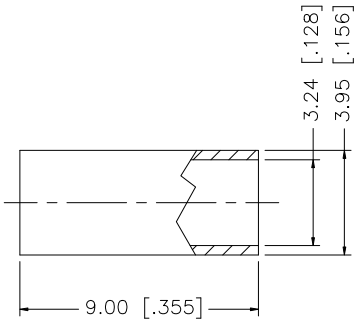


REV.	DATE	ECR NO.	DESCRIPTION
A	07/21/98	—	REDIMENSION AND ADD NOTES
B	05/19/03	—	UPDATE DRAWING FORMAT
C	02/10/04	—	MODIFY PLATING SPECS
D	09/30/05	—	REVISE ALL PLATING TO BRT. TIN
E	11/14/05	—	UPDATE COMPONENT DIMENSIONS
F	12/09/08	100063	REVISE PLATING TO NICKEL

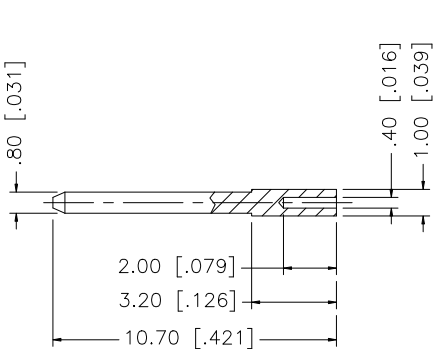

RECOMMENDED
CABLE STRIPPING DIM'S

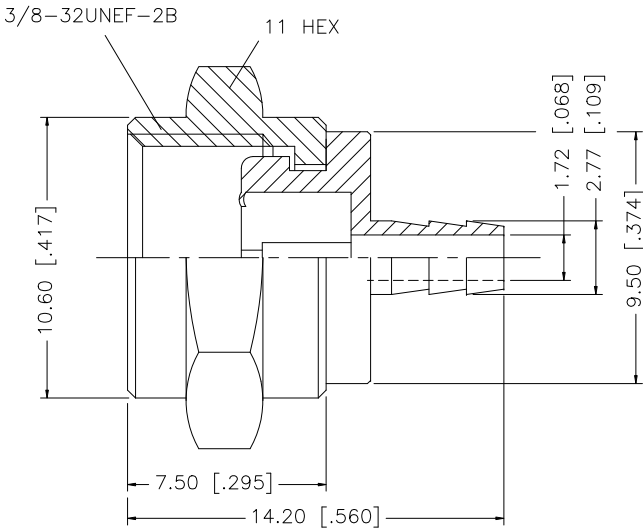

NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .128" [3.25]

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS		DATE		Amphenol Connex					
8						DRAWN	GRS	12/09/08							
7						CHECKED				PART DESCRIPTION F CRIMP PLUG (RG-179/U CABLE - 75ohm)					
6						ISSUED									
5	FERRULE	COPPER	NICKEL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm	SHEET	1 OF 1				PART NO. 222113				
4	RING	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"										
3	CONTACT PIN	BRASS	GOLD	1		CAD FILE				DWG. NO. 222113.DWG					
2	DIELECTRIC	PTFE	NATURAL	1		C:/222/222113.DWG									
1	BODY	BRASS	NICKEL	1						REV. F					
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING										
										SIZE A		SCALE NA			