


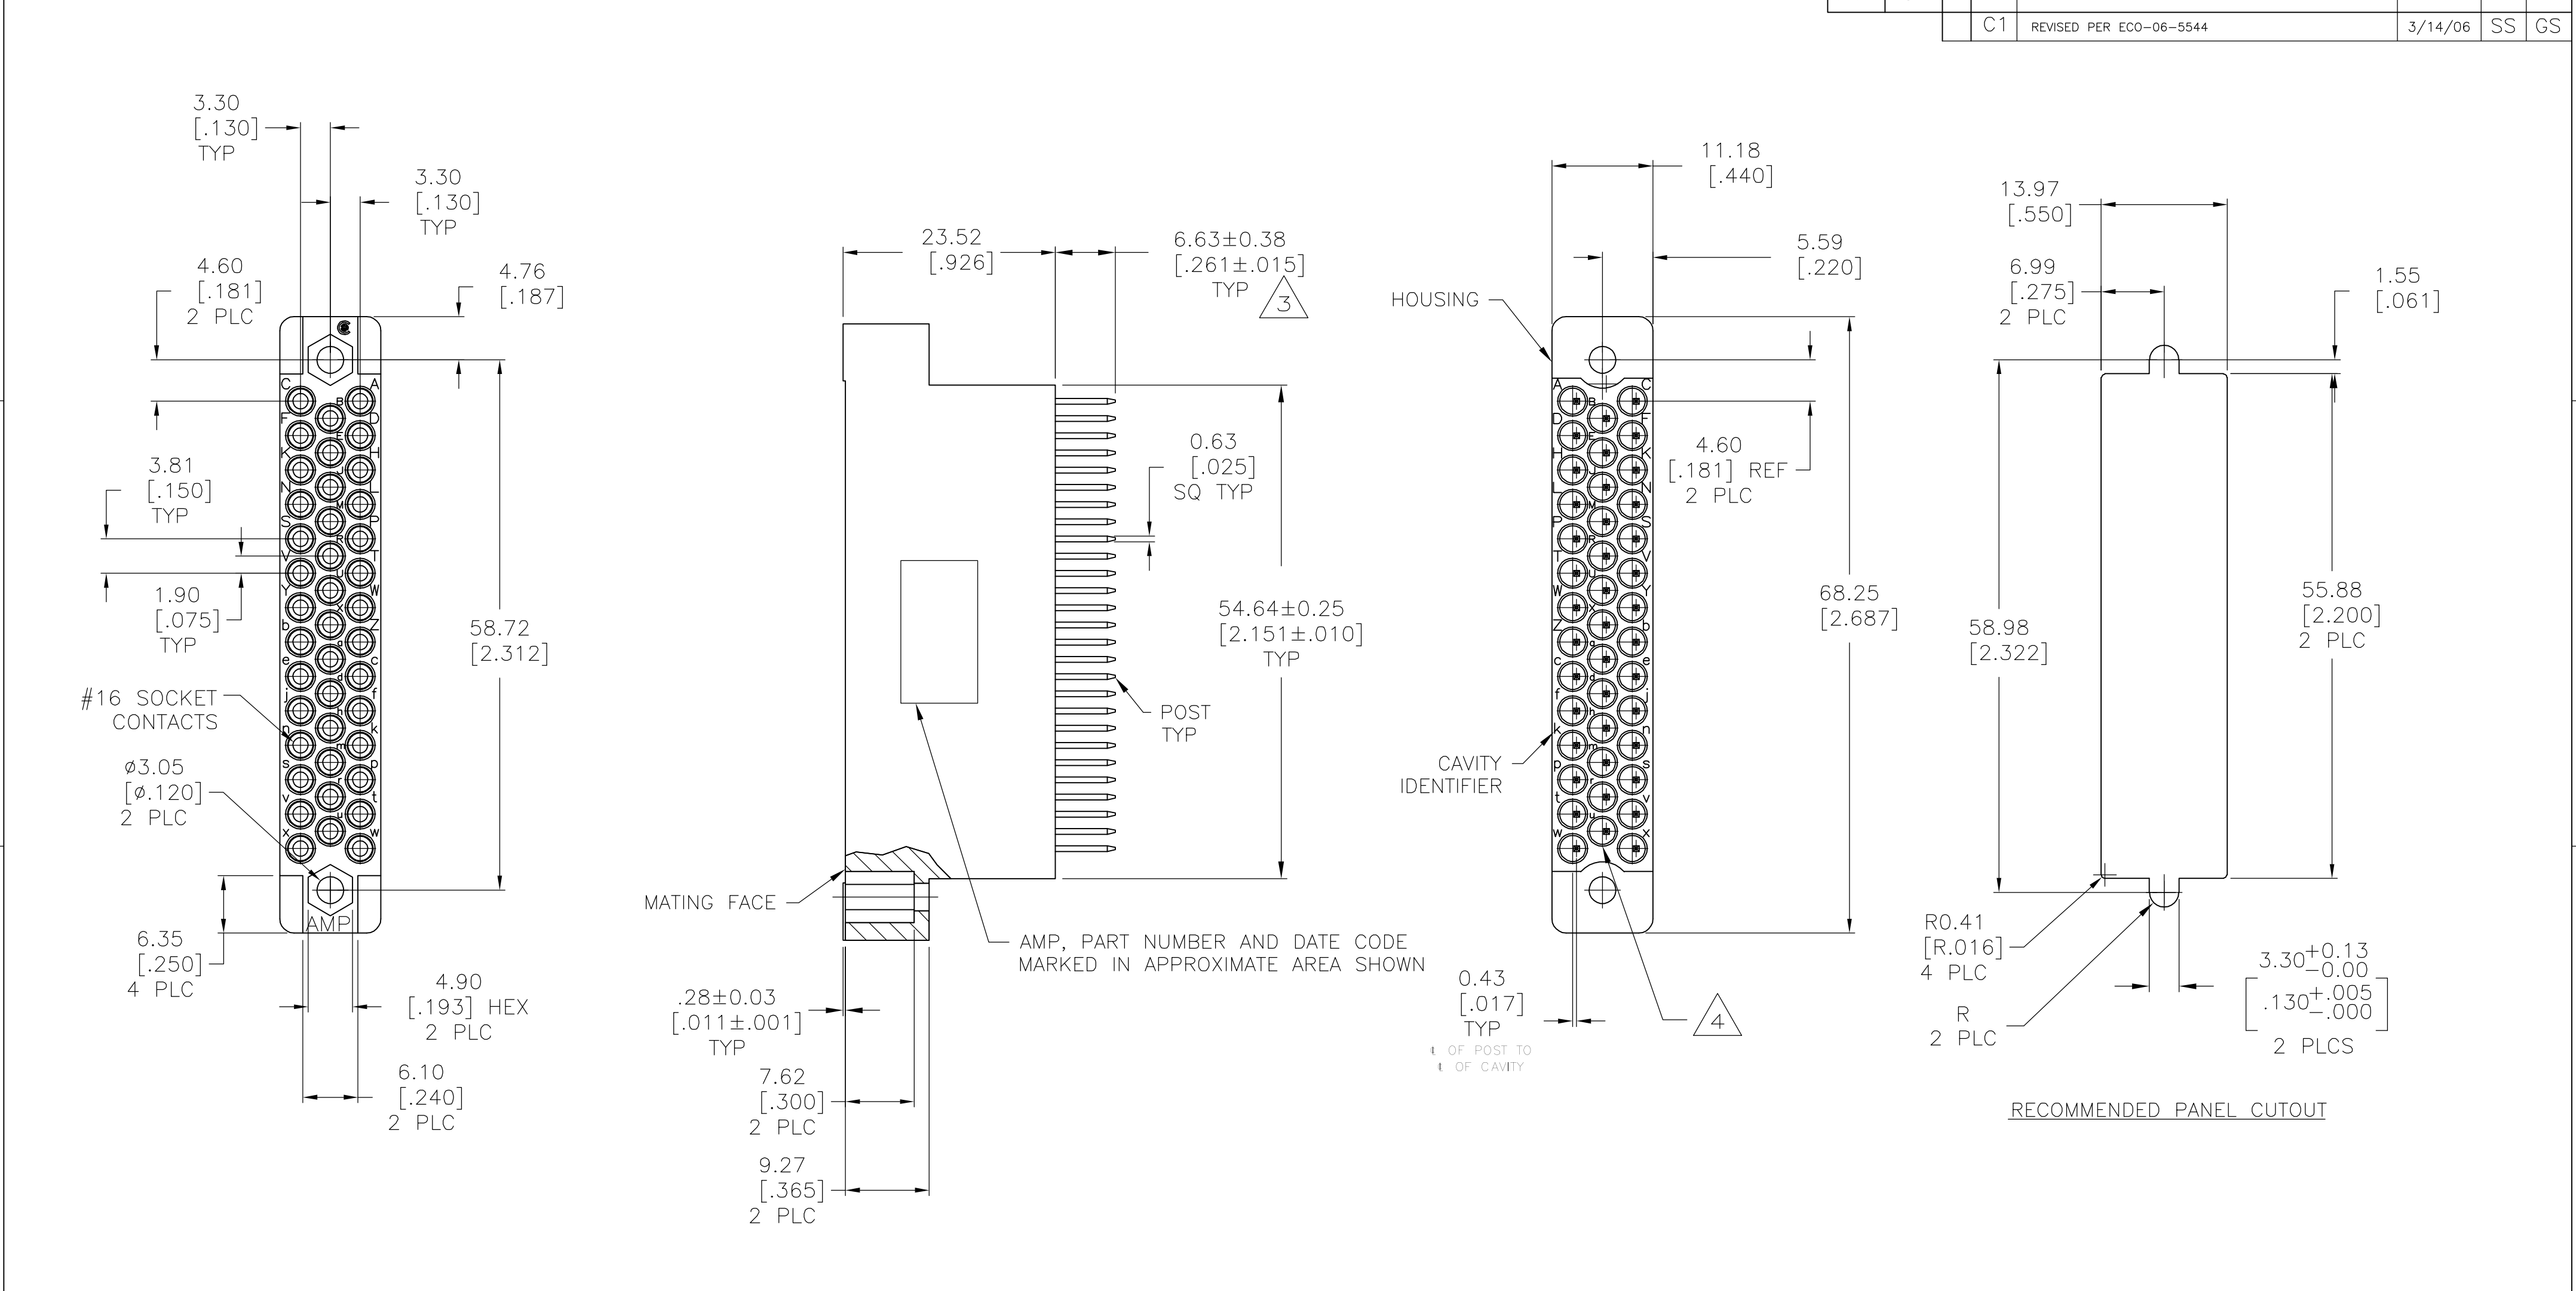

1

HOUSING: DIALLYL PHTHALATE, BLUE.  
CONTACT BODY & POST: BRASS.  
CONTACT SPRING: STAINLESS STEEL.

2

CONTACT BODY: 0.76µm [.000030] MIN GOLD INTERNALLY FOR A LENGTH OF 5.08[.200] MIN FROM MATING END,  
GOLD FLASH ON THE REMAINDER OVER 0.76µm[.000030] MIN NICKEL.  
CONTACT POST: 2.54µm [.000100] MIN TIN-LEAD OVER 2.54µm[.000100] MIN COPPER.

3

WHEN CONTACT IS FULLY SEATED FORWARD.

4

CONTACTS NOT LOADED IN MIDDLE ROW.

5

CONTACT BODY: 0.76µm [.000030] MIN GOLD INTERNALLY FOR A LENGTH OF 5.08[.200] MIN FROM MATING END,  
GOLD FLASH ON THE REMAINDER OVER 0.76µm[.000030] MIN NICKEL.  
CONTACT POST: 2.54µm [.000100] MIN TIN OVER 2.54µm[.000100] MIN COPPER.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:  
mm [INCHES]

0 PLC ± -  
1 PLC ± -  
2 PLC ± 0.13 [.005]  
3 PLC ± -  
4 PLC ± -  
ANGLES ± -  
FINISH -

DWN  
S SCHLEGEL  
5/15/02

CHK  
H. SAID  
5/15/02

APVD  
H. SAID  
5/15/02

PRODUCT SPEC

APPLICATION SPEC

WEIGHT -

CUSTOMER DRAWING

tyco  
Electronics

Tyco Electronics Corporation  
Harrisburg, PA 17105-3608

RCPT. ASSEMBLY, 41 POSITION,  
POSTED, M SERIES

SIZE  
A2

CAGE CODE  
00779

DRAWING NO  
C=796885

RESTRICTED TO  
-

SCALE  
2:1

SHEET  
1 of 1

REV  
C1