


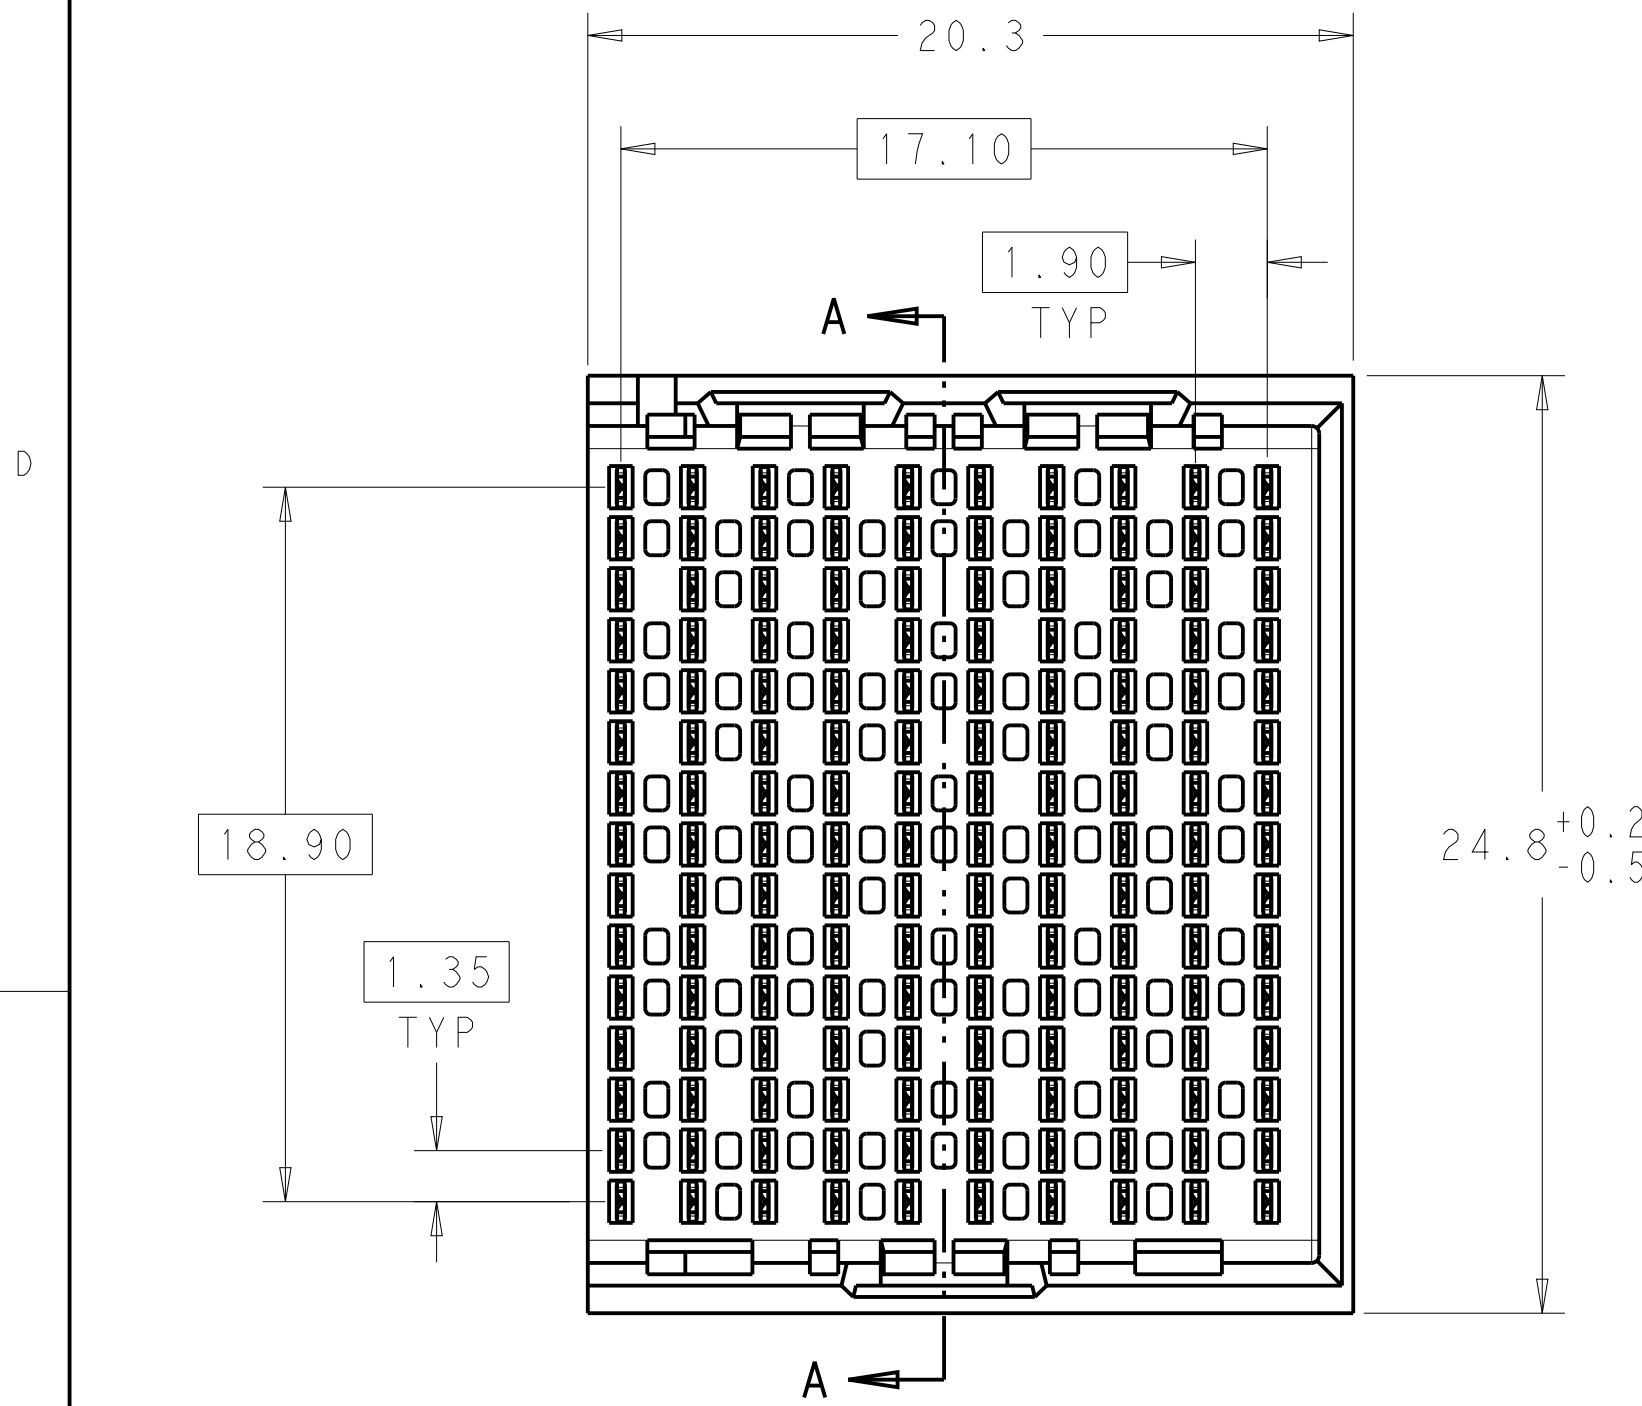
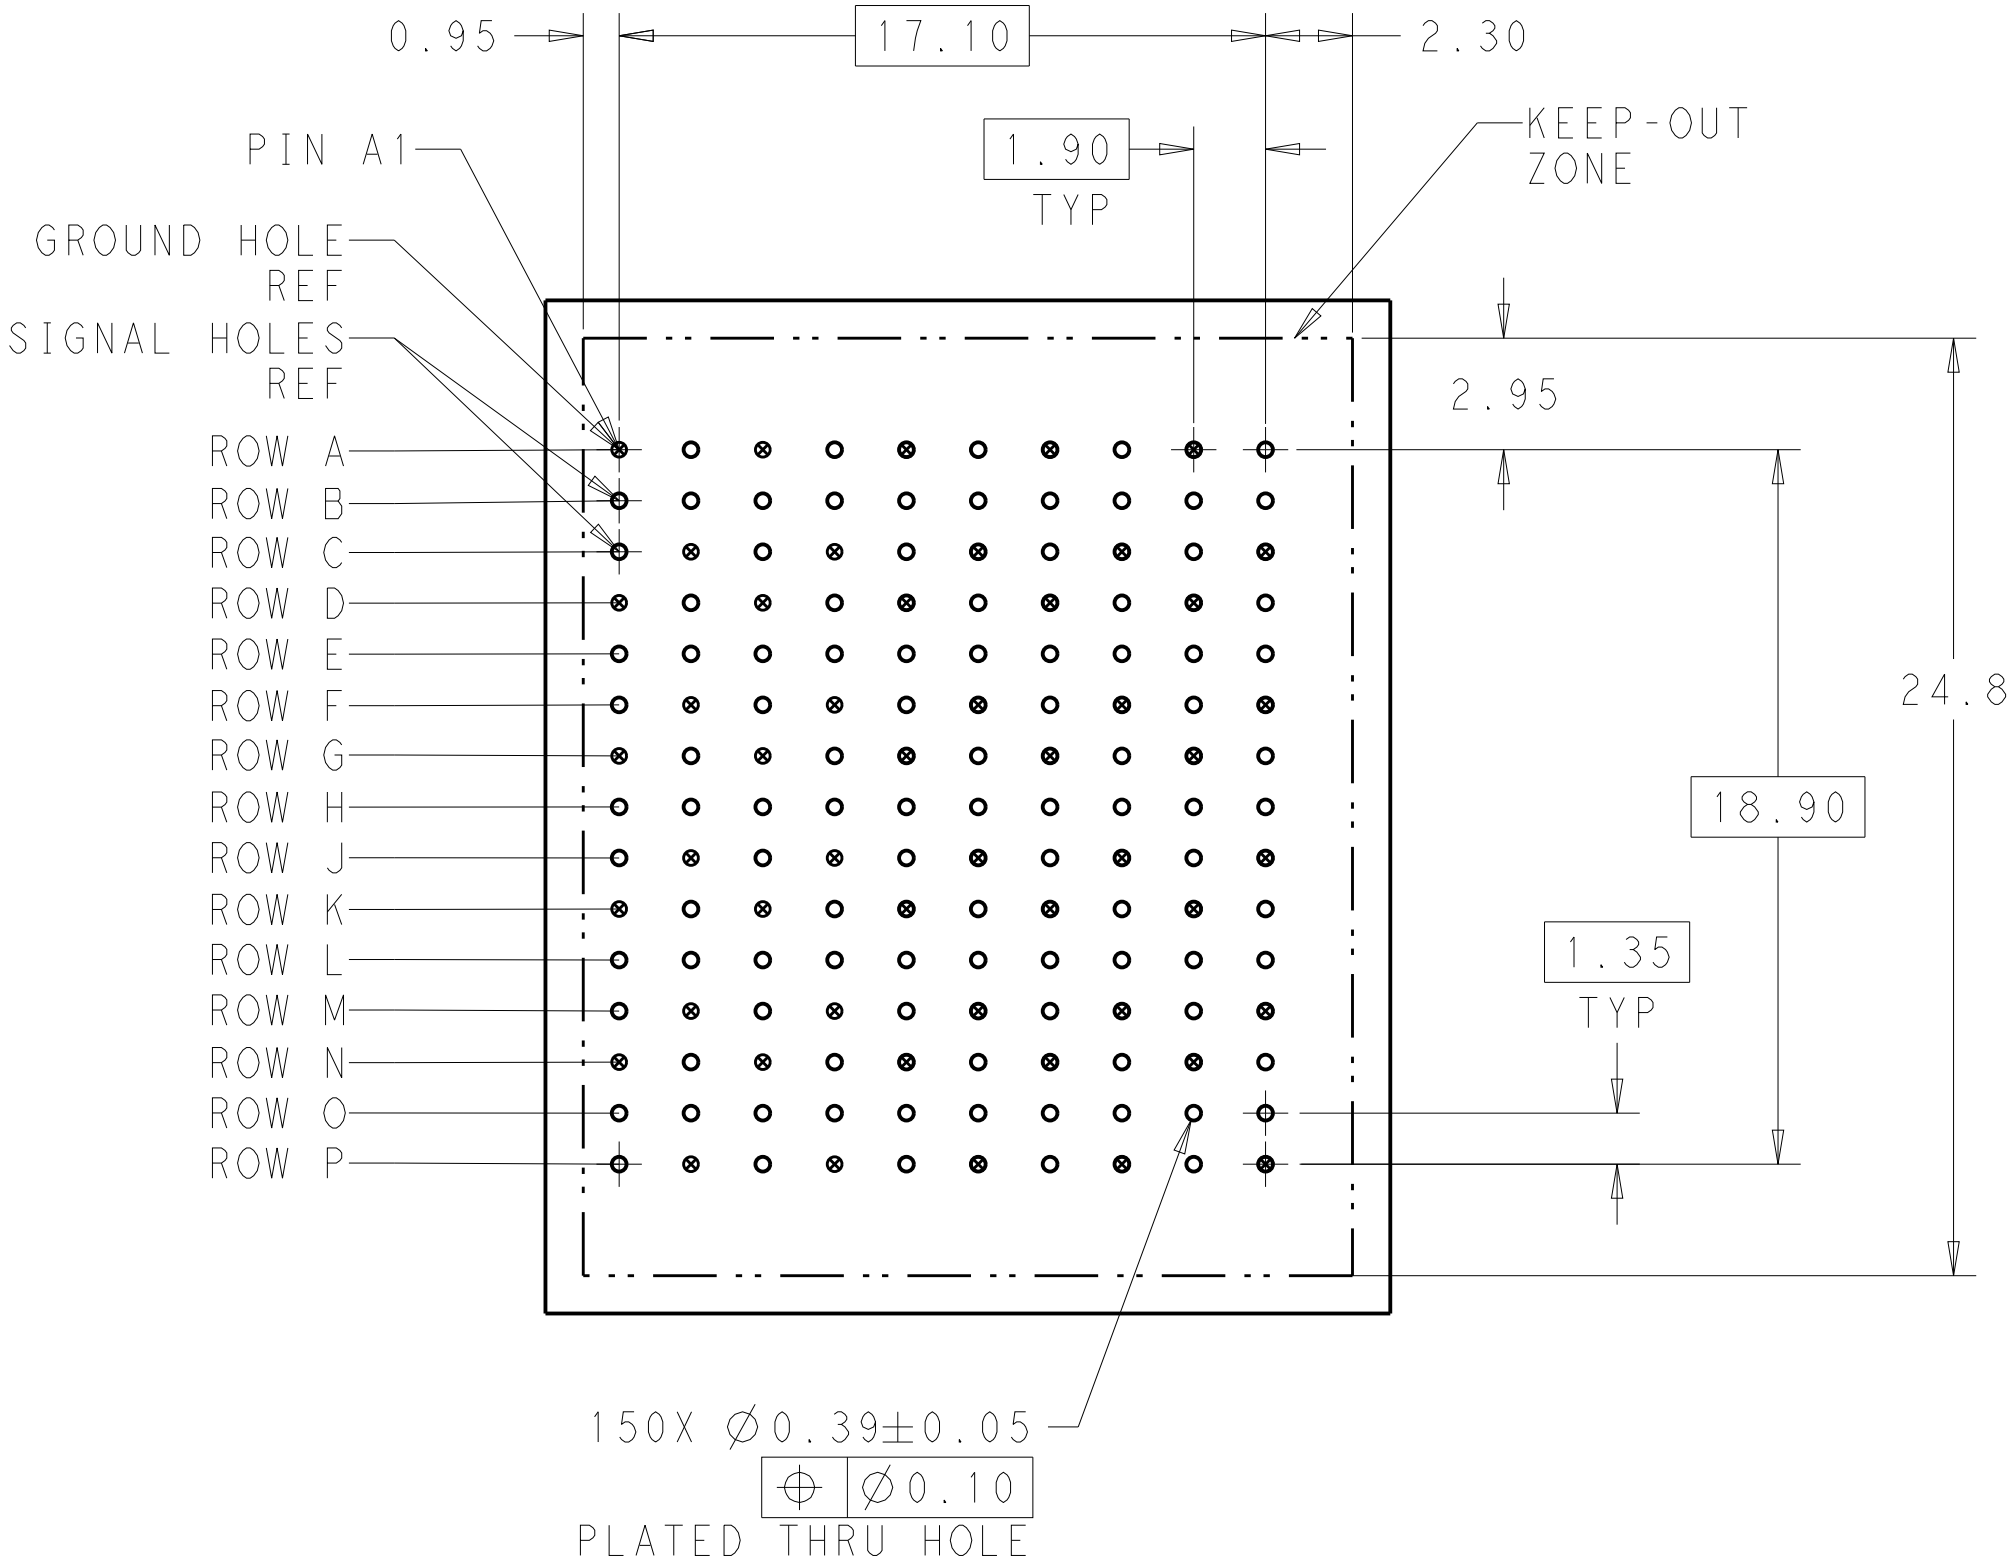


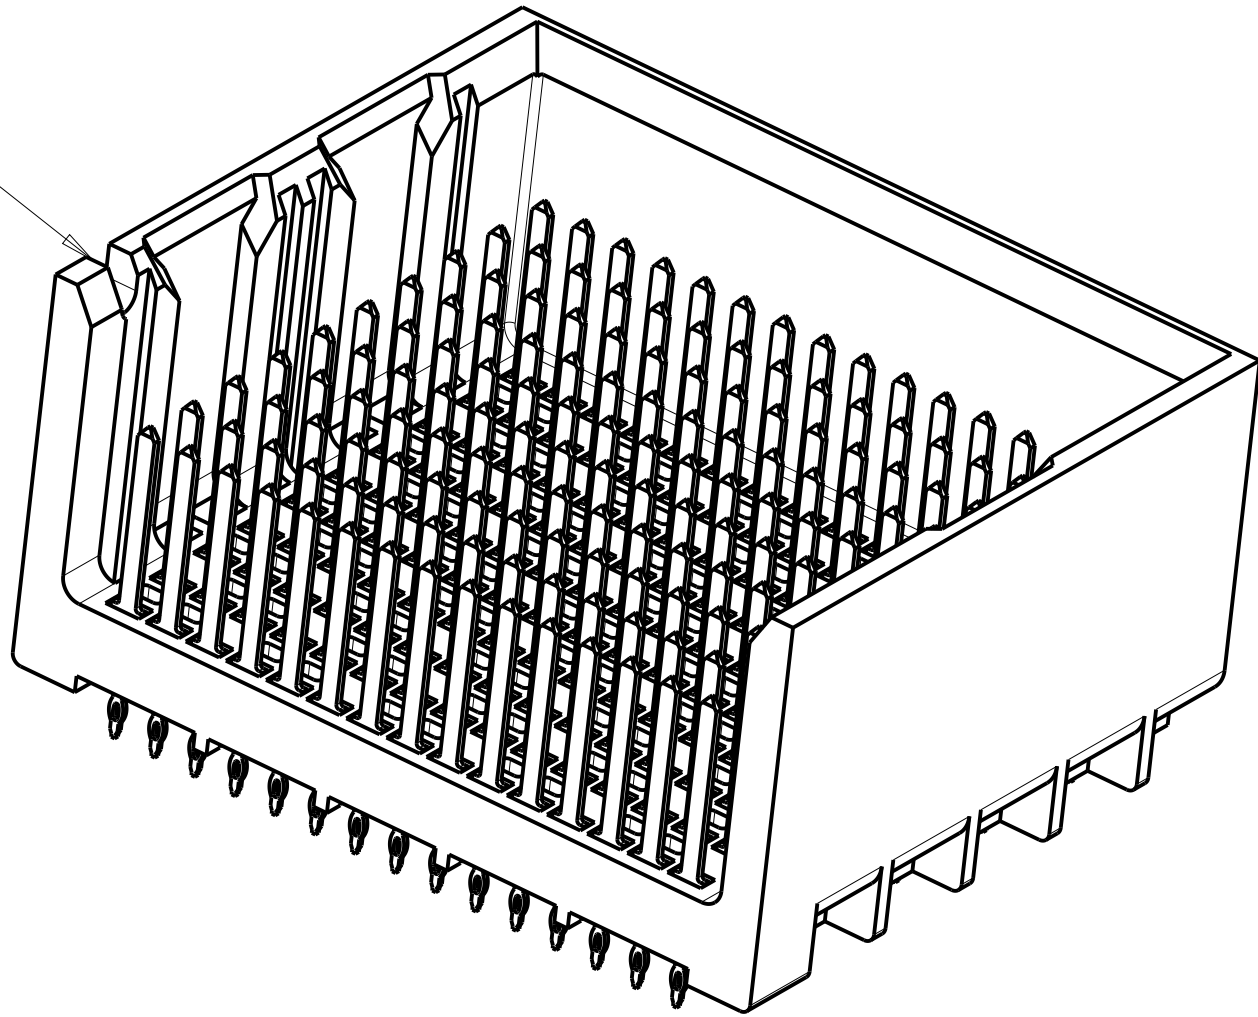

NOTCH DESIGNATES ROW A

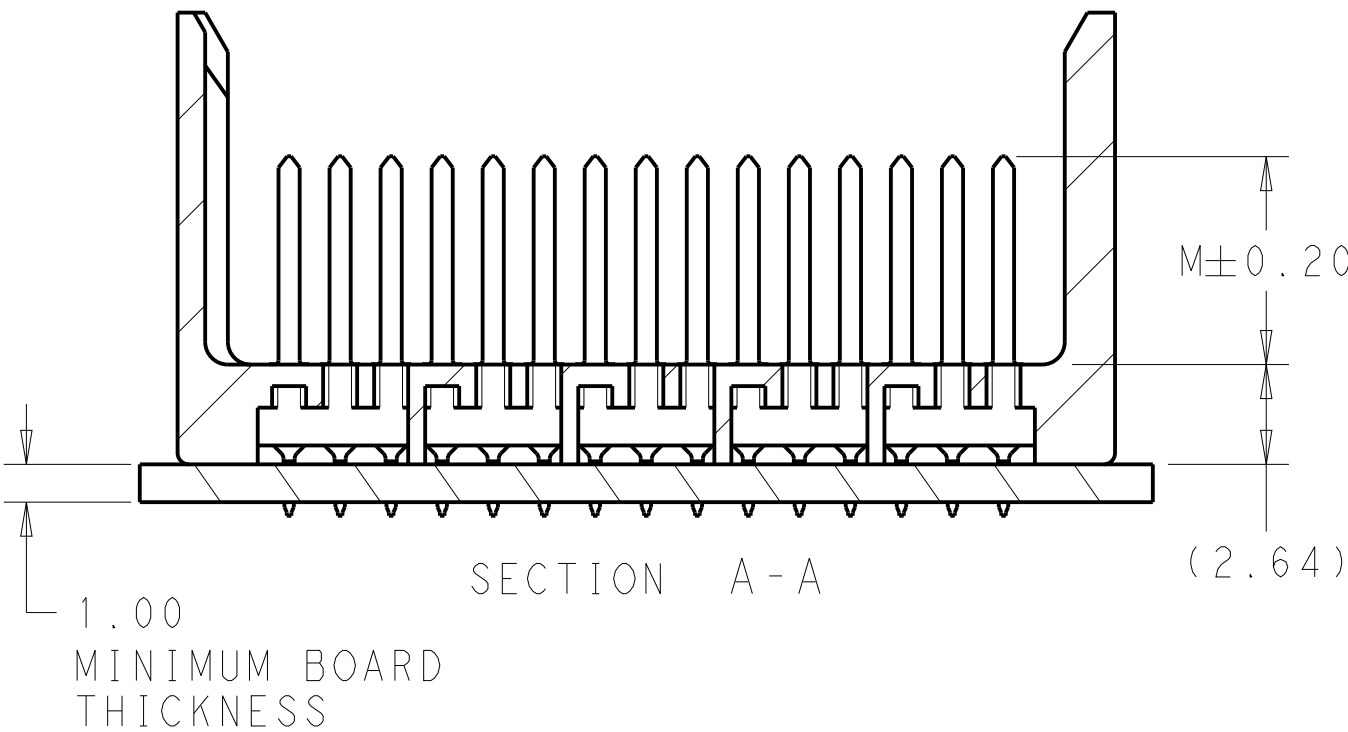

UNGUIDED
BACKPLANE HOLE PATTERN
(CONNECTOR SIDE)

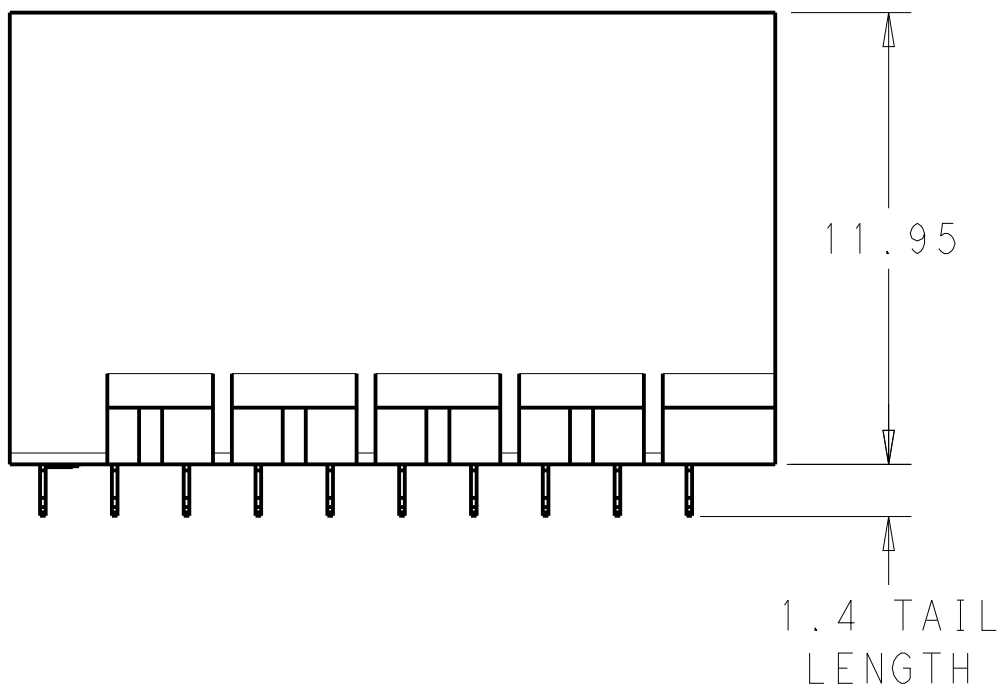

- 1 MATERIAL:
HOUSING: LCP, GLASS FILLED, UL94V-0.
TERMINALS: HIGH PERFORMANCE COPPER ALLOY.
- 2 FINISH:
30µ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN
ON PCB TAILS, NICKEL OVERALL.
- 3 FINISH:
30µ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN-LEAD
ON PCB TAILS, NICKEL OVERALL.

REVISIONS					
P.	LTR.	DESCRIPTION	DATE	DWN.	APVD.
	C	REVISED PER ECO-14-000933	28JAN2014	AP	DD

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN. J. K. SHOBER 13JAN2011	 TE Connectivity	
DIMENSIONS:		CHK. J. EABY 13JAN2011		
mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME
		APVD. J. EABY 13JAN2011		
		PRODUCT SPEC		IMPACT, 5 PAIR, 10 COLUMN, HEADER UNGUIDED, RIGHT END WALL SIGNAL MODULE, 0.39 PTH
		-		
		APPLICATION SPEC		
MATERIAL		SIZE		CAGE CODE DRAWING NO
		A100779C=2007855		
WEIGHT		RESTRICTED TO		
-		-		
CUSTOMER DRAWING		SCALE 5:1 SHEET 1 OF 2 REV C		
SEE TABLE				

