

5

4

3

2

1



Mating face according to : MIL-C24308 / DIN 41652 / CECC 75301-802

No.1 contact

nut thread

2.9 ± 0,3

Printed board layout
component side

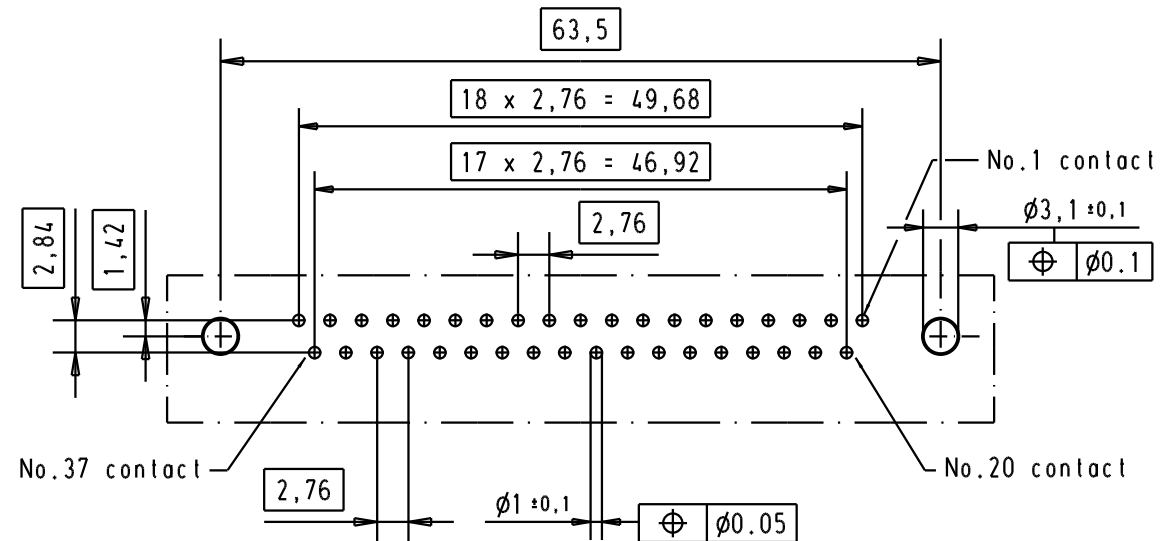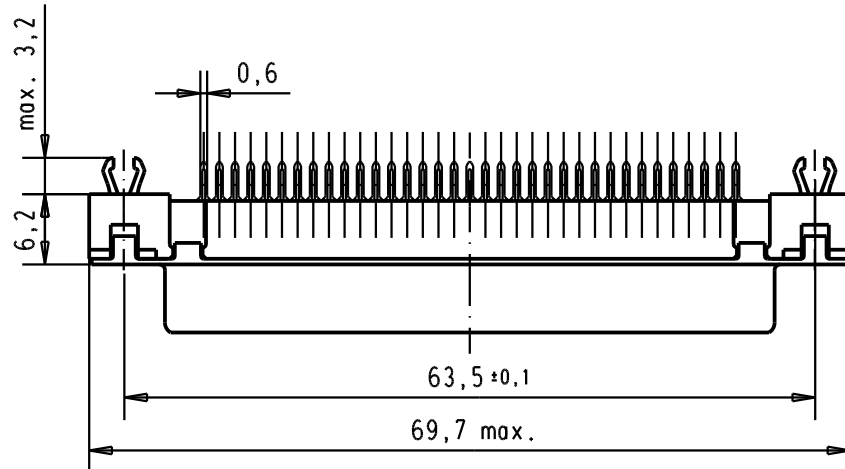

Connector retention and insertion forces on the PCB = 25 / 80 newtons

09 66 455 3511

M3

1

09 66 455 6511

M3

2

09 66 455 7511

M3

3

09 66 455 3512

4-40 UNC

1

09 66 455 6512

4-40 UNC

2

09 66 455 7512

4-40 UNC

3

Part number

Nut thread

Performance level

Mod.

Dat.

Name

HARTING EURL
F-95972 Paris

Dat.

Name


Detail.

05/03/02

CV

Insp.

Stand.



All Dim. in mm
Orig. Size DIN A 4



D-sub, High temperature,
37 poles, female, straight,
with solder pins 2.9,
nuts and grounding board lock.

Maßstab/
Scale

1,5:1

Blatt/ Page

1

TB 09 66 455 x51x

Sub.