




1	2	3	4	5	6	7	8
REV.	ECN NO.	DATE	SIGN	DESCRIPTION			




(7) Sealing Nut



(6) Clamp Ring




(5) Seals B2



(4) Seals B1



(3) Screw Nut







(2) Connector



(1) O-Ring

With Liquid Glue
點 防水膠

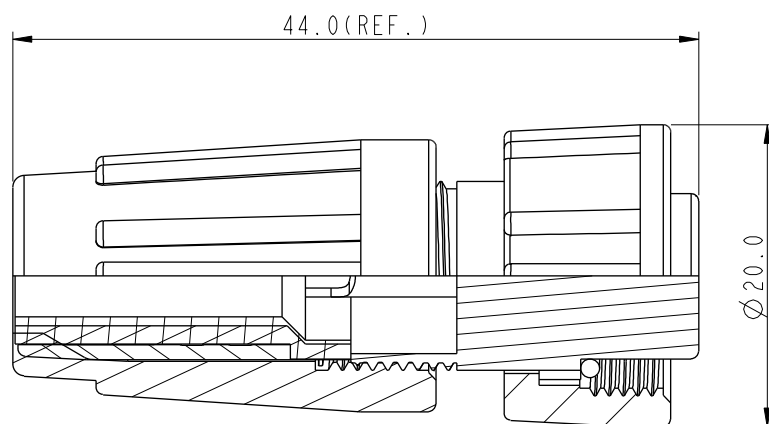

Pin Assignments
Front View 前視圖

Note:

- * Seals B1 for Cable OD: $\varnothing 4.5\text{mm} \sim \varnothing 6.5\text{mm}$
(防水墊圈B1線徑: $\varnothing 4.5\text{mm} \sim \varnothing 6.5\text{mm}$)
- * Seals B2 for Cable OD: $\varnothing 3.5\text{mm} \sim \varnothing 5.3\text{mm}$
(防水墊圈B2線徑: $\varnothing 3.5\text{mm} \sim \varnothing 5.3\text{mm}$)
- * One Set Unassembled in One PE Bag
(一組未組裝, 放置於一個PE袋, 並封口)
- * Important Dimension.
- * Waterproof Rate : IP66
- * Ring: Black, EPDM
- * Housing: Black, Nylon+GF
- * Pin: Copper Alloy, Gold Plated
- * Screw Nut: Black, Nylon+GF
- * Seals: Black, EPDM
- * Clamping Ring: Black, Nylon
- * Sealing Nut: Black, Nylon
- * PE Bag: 90mm*85mm
- * Liquid Glue: Clear

UNIT: mm		TITLE Standard, Assy Screw 2Pin F Conn F Pin	
TOLERANCE		SCALE 1:1	SIZE A4
.X ±0.25		SHEET 1	OF 1
.XX ±0.1		REV. A	WC-REV. A.4
.XXX ±0.05		QC: Inspection item	
ANGLES ±1°			

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO. BB-02BFFA-SL6001	DRAWN BY SamChang	DATE 2012-03-14
DWG NO. BB-02BFFA-SL6001	CHECKED BY Jeffrey	DATE 2012-03-19
CUSTOMER ALTW	APPROVED BY Kevin	DATE 2012-03-19