



D

C




B

A

- 1 RECOMMENDED PANEL THICKNESS 1.57-2.3.
2. PANEL MUST BE PUNCHED SO THAT HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
- 3 CIRCUIT IDENTIFIERS LOCATED APPROXIMATELY AS SHOWN.
- 4 MATERIAL NYLON 66/6 V0 UL94
- 5 MATERIAL PA66 V0 GW UL94.

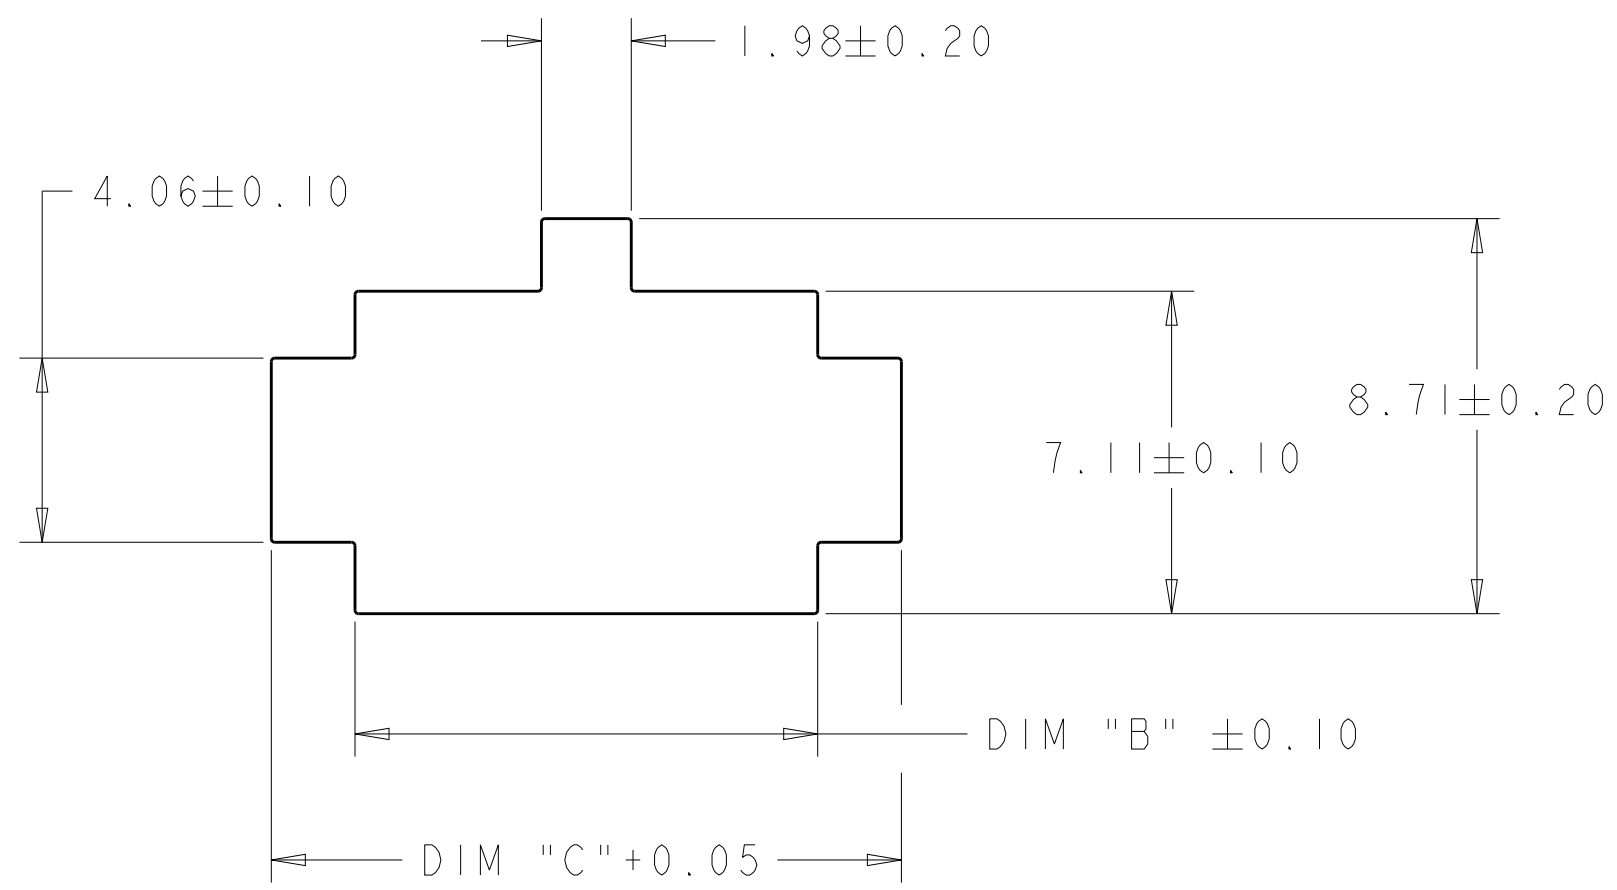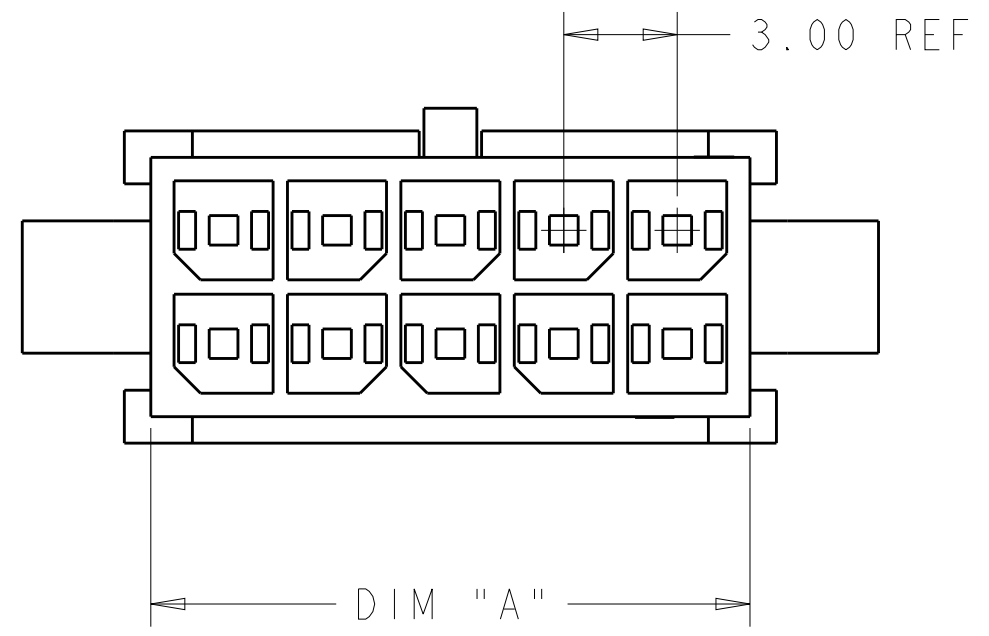

PANEL CUT-OUT 1

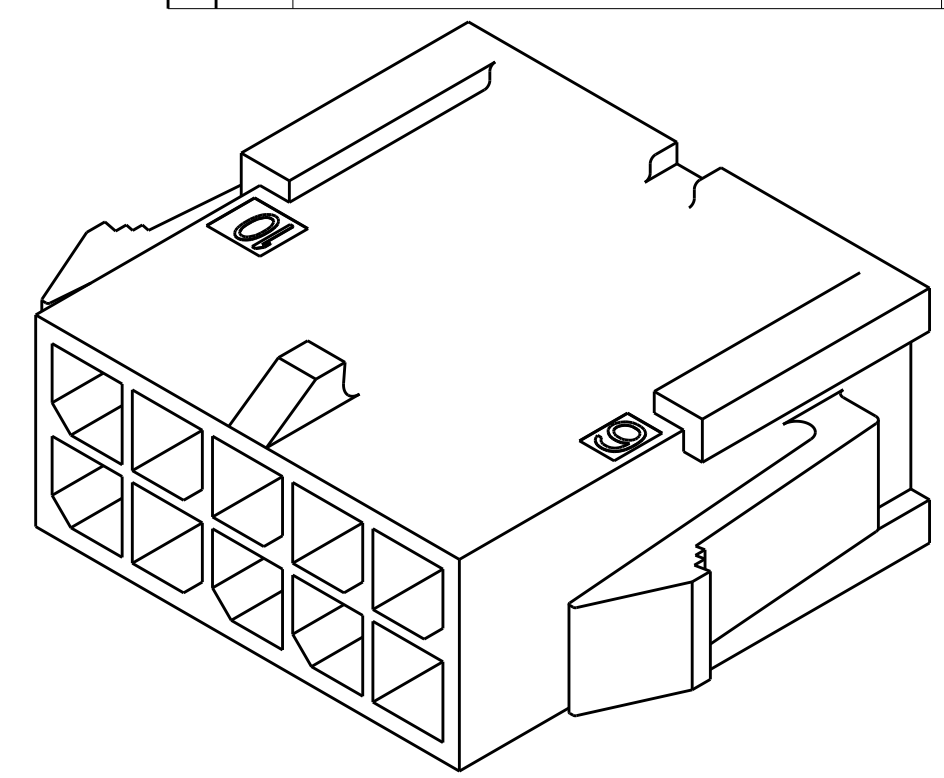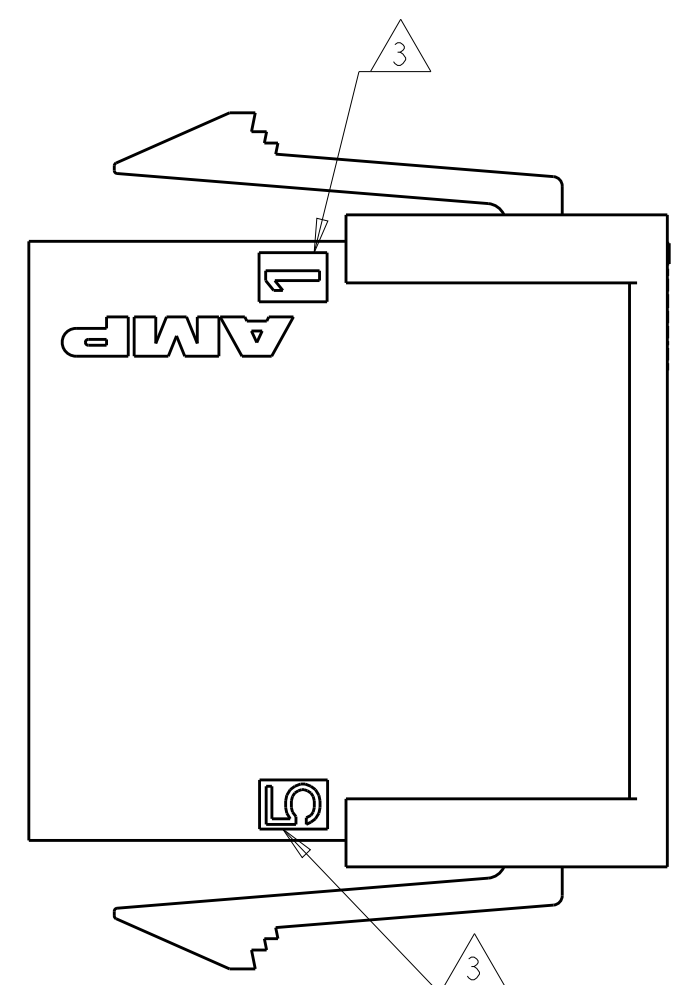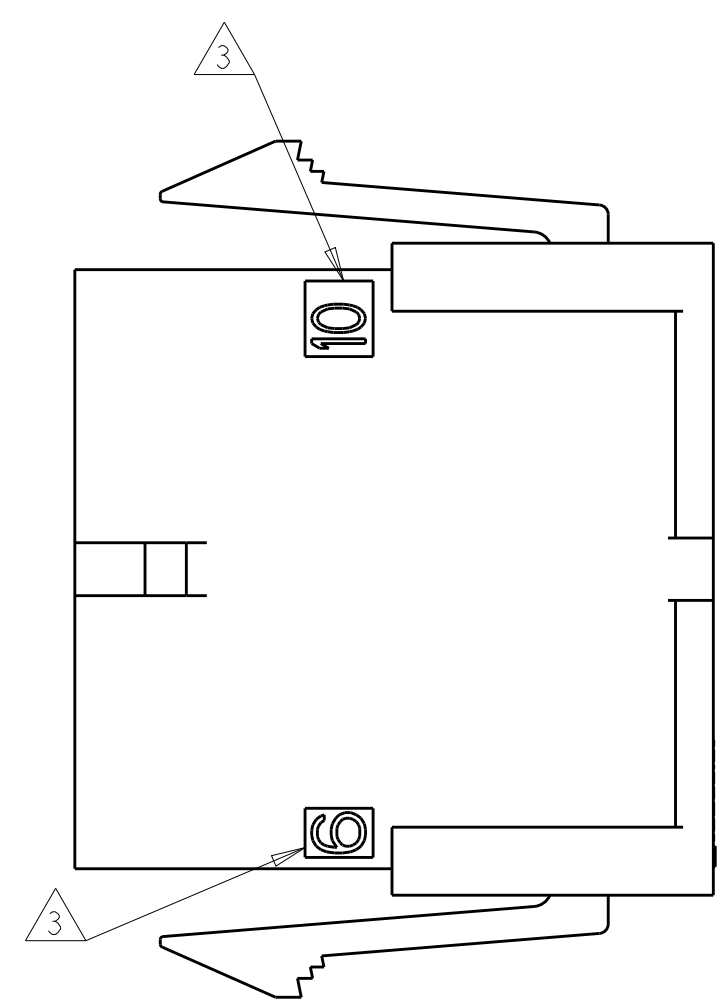

SCALE 5:1

| LOC | DIST | REVISONS |     |                           |           |     |      |
|-----|------|----------|-----|---------------------------|-----------|-----|------|
|     |      | P        | LTR | DESCRIPTION               | DATE      | DWN | APVD |
| CM  | 00   |          | P3  | REVISED PER ECR-16-013672 | 14OCT2016 | BW  | SC   |
|     |      |          |     |                           |           |     |      |
|     |      |          |     |                           |           |     |      |
|     |      |          |     |                           |           |     |      |
|     |      |          |     |                           |           |     |      |

|        |       |       |       |             |             |
|--------|-------|-------|-------|-------------|-------------|
| 5      | 19.88 | 16.20 | 15.85 | 10          | 3-794615-0  |
|        | 16.88 | 13.20 | 12.85 | 8           | 3-794615-8  |
|        | 13.88 | 10.20 | 9.85  | 6           | 3-794615-6  |
|        | 10.88 | 7.20  | 6.85  | 4           | 3-794615-4  |
|        | 7.88  | 4.20  | 3.85  | 2           | 3-794615-2  |
| 4      | 40.88 | 37.20 | 36.85 | 24          | 2-794615-4  |
|        | 37.88 | 34.20 | 33.85 | 22          | 2-794615-2  |
|        | 34.88 | 31.20 | 30.85 | 20          | 2-794615-0  |
|        | 31.88 | 28.20 | 27.85 | 18          | 1-794615-8  |
|        | 28.88 | 25.20 | 24.85 | 16          | 1-794615-6  |
|        | 25.88 | 22.20 | 21.85 | 14          | 1-794615-4  |
|        | 22.88 | 19.20 | 18.85 | 12          | 1-794615-2  |
|        | 19.88 | 16.20 | 15.85 | 10          | 1-794615-0  |
|        | 16.88 | 13.20 | 12.85 | 8           | 794615-8    |
|        | 13.88 | 10.20 | 9.85  | 6           | 794615-6    |
|        | 10.88 | 7.20  | 6.85  | 4           | 794615-4    |
|        | 7.88  | 4.20  | 3.85  | 2           | 794615-2    |
| REMARK | DIM C | DIM B | DIM A | NO. OF POS. | PART NUMBER |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±

1 PLC ±

2 PLC ±0.13

3 PLC ±

4 PLC ±

ANGLES ±

FINISH

MATERIAL

NYLON, BLACK

UL94V-0

DWN

W J RUDY

29AUG2000

CHK

W DAVIS

29AUG2000

APVD

W DAVIS

29AUG2000

PRODUCT SPEC

108-1836

APPLICATION SPEC

114-13000

WEIGHT

-

CUSTOMER DRAWING

TE Connectivity

NAME

PLUG HOUSING, 2 to 24 POSITION  
DUAL ROW, PANEL MOUNT  
MICRO MATE-N-LOK(TM)

SIZE

A200779

CAGE CODE

C-794615

DRAWING NO

-

RESTRICTED TO

-

SCALE

6:1

SHEET

1

OF

1

REV

P3