



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	G	REVISED PER ECO-16-006308	08AUG2016	NK	MM

D


C

B


A

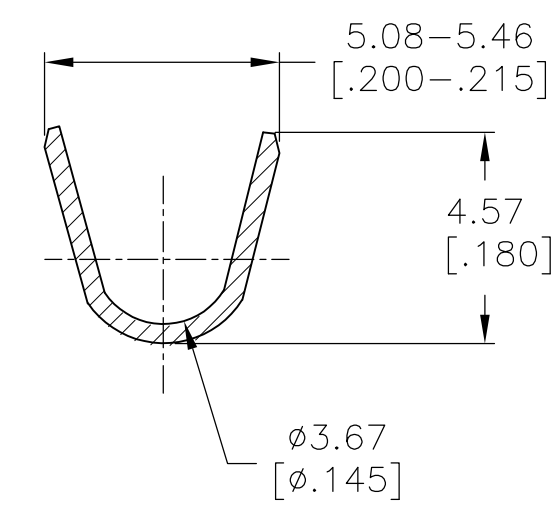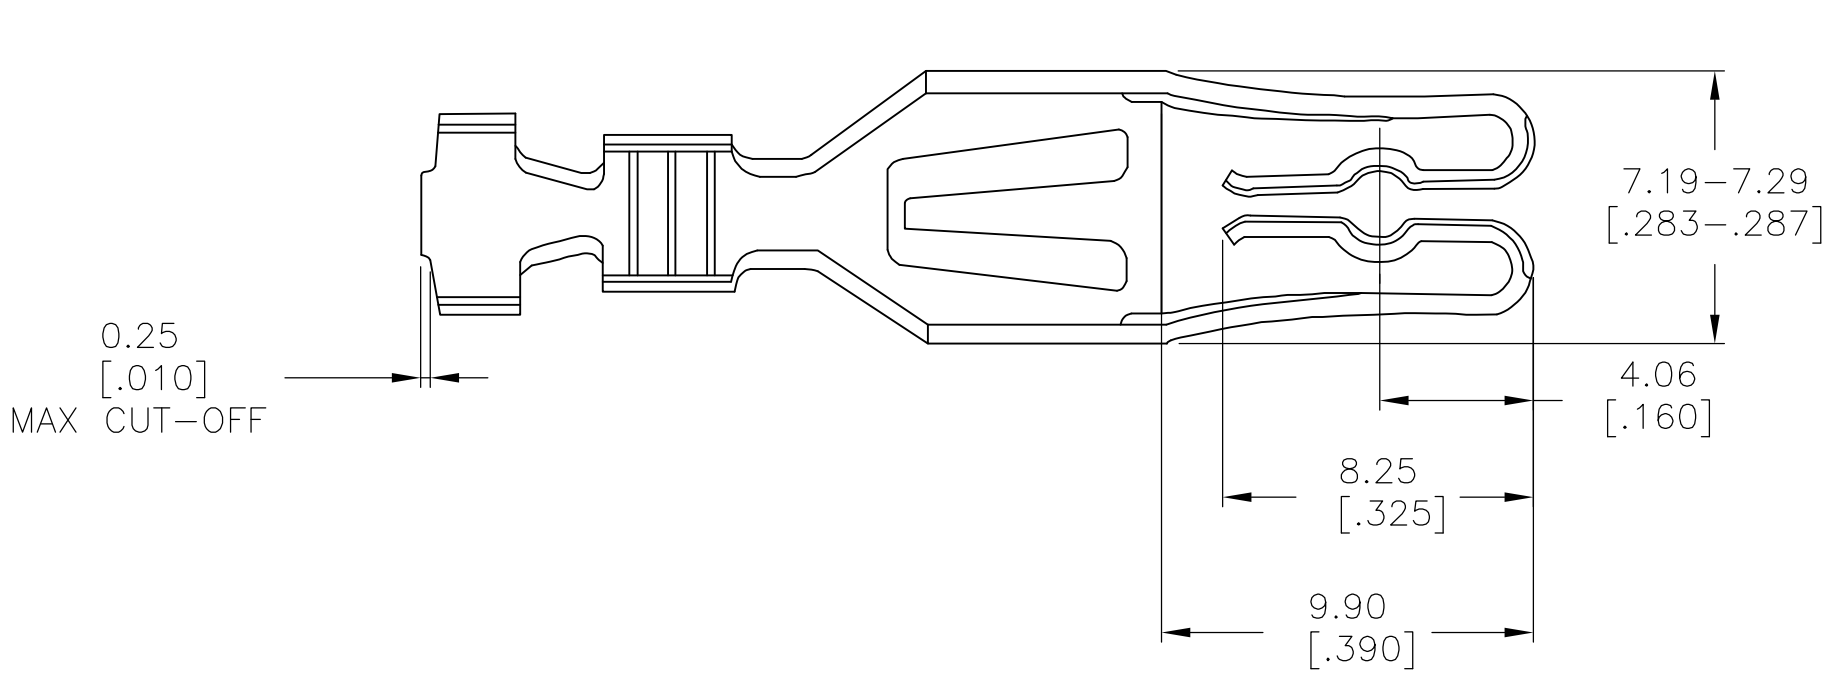

INSULATION 2.29-3.68
RANGE [.090-.145]
SECTION, A-A

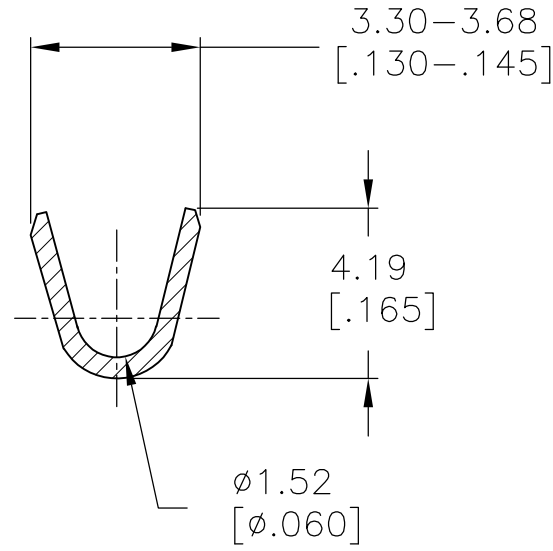

WIRE RANGE 14-16
SECTION, B-B

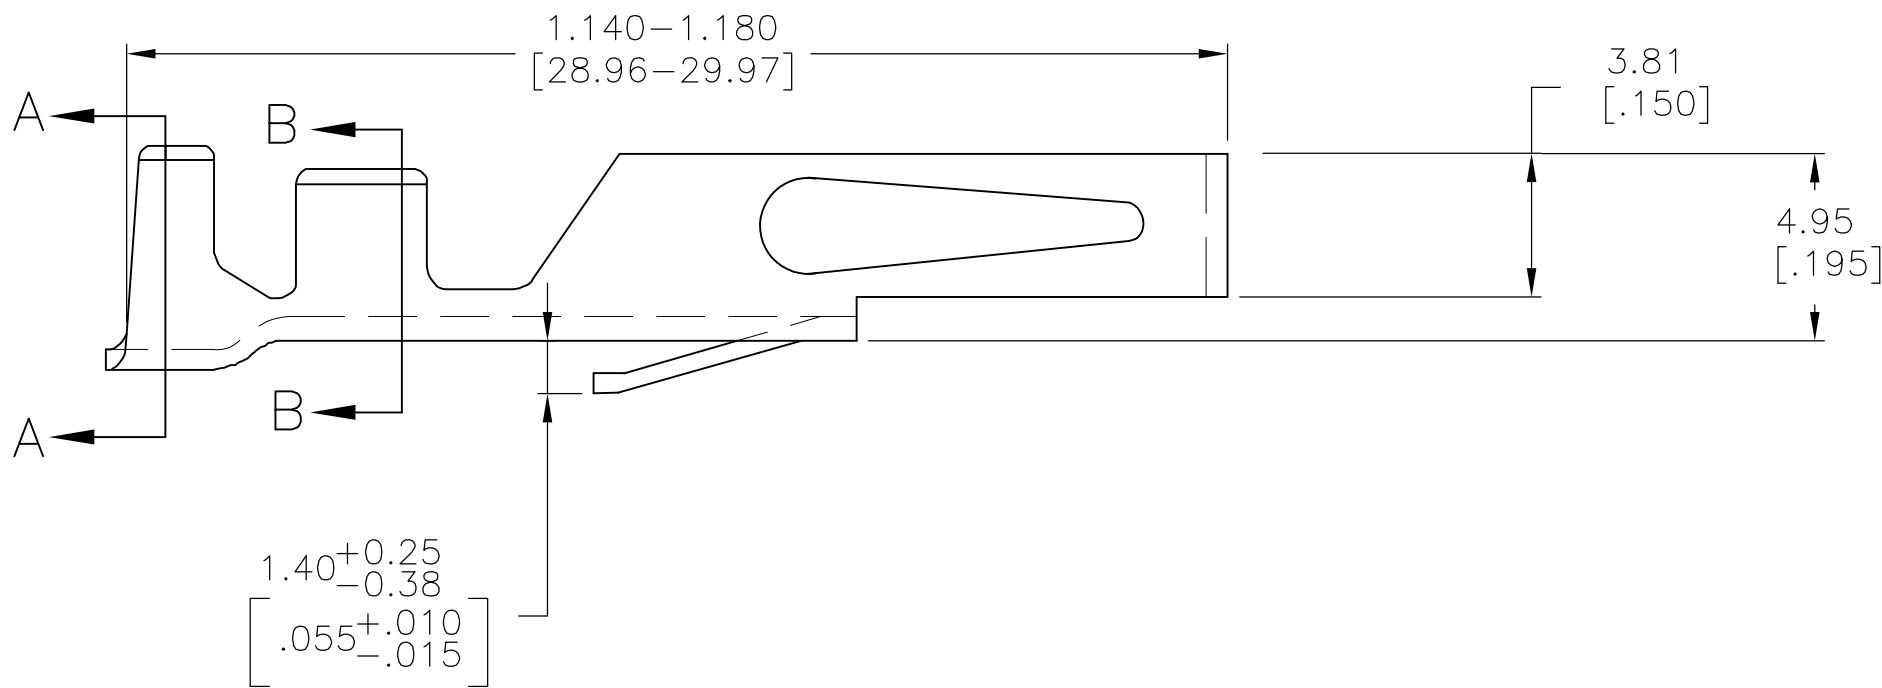

- 1

0.0038[.000150] BRIGHT TIN OVER 0.00076[.000030] NICKEL.
- 2

0.0038[.000150] MATTE TIN OVER 0.00076[.000030] NICKEL.

2	5-530518-1
1	530518-1
FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN —	15 MAY 75	 TE Connectivity								
		CHK —	15 MAY 75									
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD —	16 MAY 75	NAME						
	0 PLC	±	—	PRODUCT SPEC		LOOSE PIECE CONTACT HIGH CURRENT 14-16 AWG						
	1 PLC	±	—	—								
	2 PLC	±	—									
	3 PLC	±	—	APPLICATION SPEC								
	4 PLC	±	—	—								
MATERIAL		ANGLES ±		—		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO			
ALLOY CDA-194		FINISH		WEIGHT	—	A2	00779	C=530518	—			
 				CUSTOMER DRAWING			SCALE	5:1	SHEET	1 of 1	REV	G