

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20







© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	05JUL2015	DL	CW

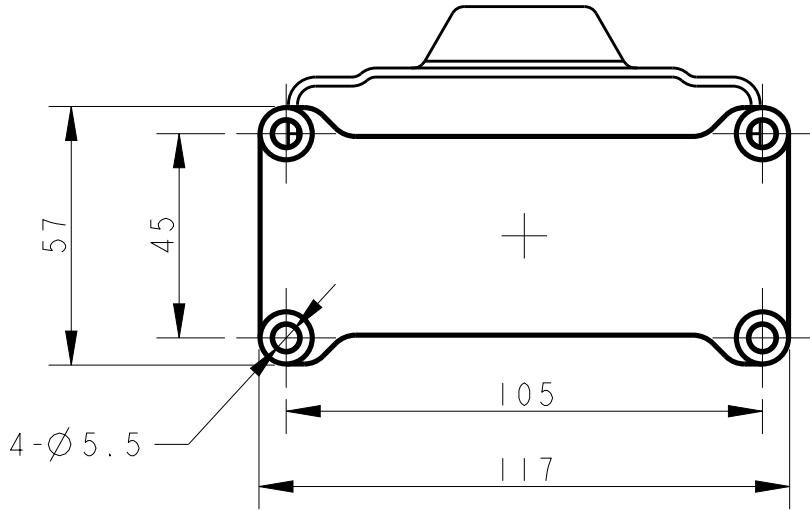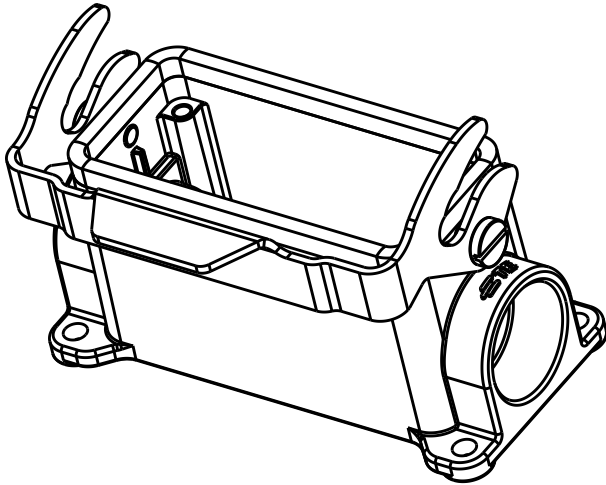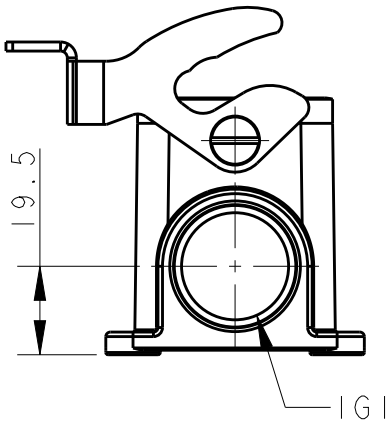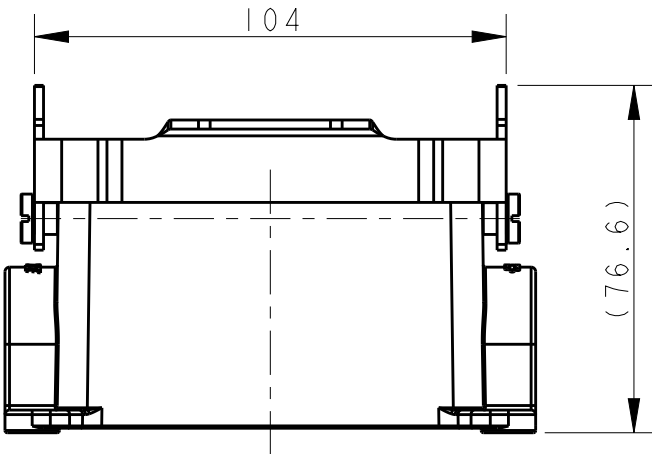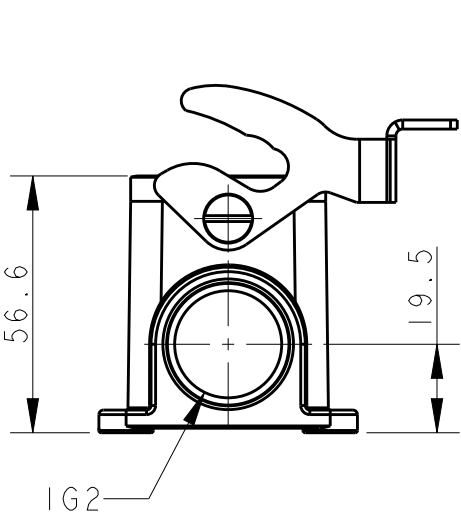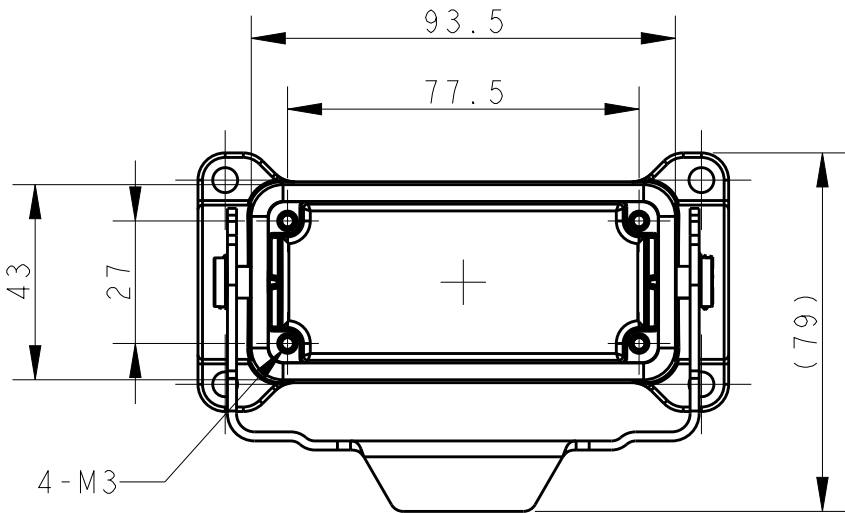

NOTES:
1. TECHNICAL CHARACTERISTICS:
BODY MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE TREATMENT: POWDER-COATED, GRAY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
主体材料: 铝合金
表面处理: 粉末喷涂, 灰色
工作温度: -40-+125°C
防护等级: IP65(配合)

TI610163121-000	HI6B-SGR-LB-PG21	PG21	-
TI610163125-000	HI6B-SGR-LB-M25	M25	-
TI610163221-000	HI6B-SGR-LB-2PG21	PG21	PG21
TI610163225-000	HI6B-SGR-LB-2M25	M25	M25
ASSEMBLY PART NUMBER	ASSEMBLY PART DESCRIPTION	IG1	IG2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 05JUL2015	 TE Connectivity		
DIMENSIONS: mm		CHK CHRIS WANG 05JUL2015			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD XU XIANG 05JUL2015			
MATERIAL TBD		PRODUCT SPEC 108-137013			
FINISH -		APPLICATION SPEC 114-137013	NAME HI6B-SGR-LB-PG/M		
CUSTOMER DRAWING		WEIGHT -	SIZE A3	CAGE CODE -	DRAWING NO. C-TI610163XXX000
			SCALE 3:5	SHEET 1 OF 1	REV A