

Technical drawing of a cable assembly showing two views: a side view and a cross-sectional view.



Side View Dimensions:

- Overall length: 28.80 [1.135]
- Outer diameter: $\varnothing 11.50$ [.453]
- Inner diameters: $\varnothing 3.10$ [.122] and $\varnothing 4.27$ [.168]

Cross-sectional View Dimensions:

- Outer jacket thickness: 4.00 [.158]
- Braided shield thickness: 3.70 [.146]
- Central conductor diameter: 8.30 [.327]

Text: RECOMMENDED CABLE STRIPPING DIM'S

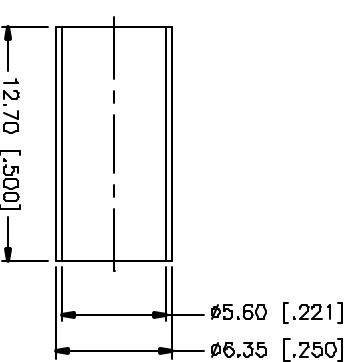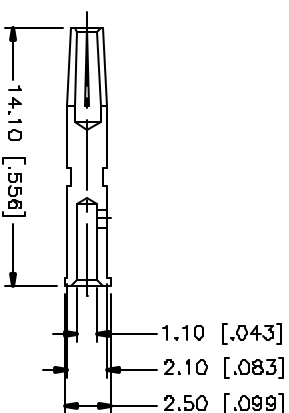

7/16-28JNEF-2A

RECOMMENDED
CABLE STRIPPING DIM'S

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE 5.41 [.213"]
2. CRIMP CONTACT PIN
HEX CRIMP SIZE 1.72 [.068"]

[illegible]