


DRAWING FOR REFERENCE: This is subject to change without notice.

Applicable standard					
Rating	Operating temperature range	-55 °C to +125 °C (95 %RH Max.)	Storage temperature range	-55 °C to +125 °C (95 %RH Max.)	
	Power	-- W	Characteristic impedance	50 Ω(0 to 18 GHz)	
	Peculiarity	----	Applicable cable	----	
SPECIFICATIONS					
ITEM	TEST METHOD		REQUIREMENTS	QT	AT
CONSTRUCTION					
General examination	Visually and by measuring instrument.		According to drawing.	X	X
Marking	Confirmed visually.			—	—
ELECTRICAL CHARACTERISTICS					
Contact resistance	10 mA Max.(DC or 1000 Hz)		Center contact 12 mΩ Max.	X	X
			Outer contact 12 mΩ Max.	X	X
Insulation resistance	500 V DC.		1000 MΩ Min.	X	X
Withstanding voltage	500 V AC for 1 min. current leakage 2 mA Max.		No flashover or breakdown.	X	X
Return loss	Frequency 0 to 18 GHz.		Return loss 20dB Min.	X	X
Insertion loss	Frequency - to - GHz.		--- dB Max.	—	—
MECHANICAL CHARACTERISTICS					
Contact insertion and extraction forces	φ 0.35 ⁰ _{-0.005} by steel gauge.		Insertion force --- N Max.	—	—
			Extraction force 0.2 N Min.	X	X
Insertion and extraction forces	Measured by applicable connector.		Insertion force --- N Max.	—	—
			Extraction force --- N Min.	—	—
Mechanical operation	500 times insertion and extractions.		1)Contact resistance: Center contact 24 mΩ Max. Outer contact 24 mΩ Max.	X	—
Vibration	Frequency 10 to 500 Hz single amplitude 0.75 mm, 98 m/s ² at 10 cycles for 3 directions.		1)No electrical discontinuity of 1 μs. 2)No damage, crack and looseness of parts.	X	—
Shock	490 m/s ² directions of pulse 11 ms at 3 times for 3 directions.			X	—
Cable clamp strength (against cable pull)	Using a pulling tester, pull the cable axially at a rate of --- mm/min. and record the strength at which the cable or connector breaks.		--- N Min.	—	—
ENVIRONMENTAL CHARACTERISTICS					
Damp heat	Exposed at -10 to +65 °C, 90 to 98 % total 10 cycles.(240 h)		1)Insulation resistance: 100 MΩ Min. (at high humidity) 2) Insulation resistance: 1000 MΩ Min. (at dry) 3)No damage, crack and looseness of parts.	X	—
Rapid change of temperature	Temperature -65 → - → +125 → - °C Time 30 → 3 → 30 → 3 min. Under 5 cycles.		No damage, crack and looseness of parts.	X	—
Corrosion salt mist	Exposed in 5 % salt water spray for 48 h.		No heavy corrsion. (The quality is judged by Return loss performance)	X	—
Count	Description of revisions		Designed	Checked	Date
Remark	RoHS COMPLIANT		Approved	KY.SHIMIZU	16.11.07
			Checked	TO.KATAYAMA	16.11.05
			Designed	RO.YOKOYAMA	16.11.05
			Drawn	RO.YOKOYAMA	16.11.05
Note QT:Qualification Test AT:Assurance Test X:Applicable Test			Drawing No.	ELC-364312-00-00	
	SPECIFICATION SHEET		Part No.	SMP-A-JJ-645-18G	
	HIROSE ELECTRIC CO., LTD.		Code No.	CL338-1005-0-00	1/1

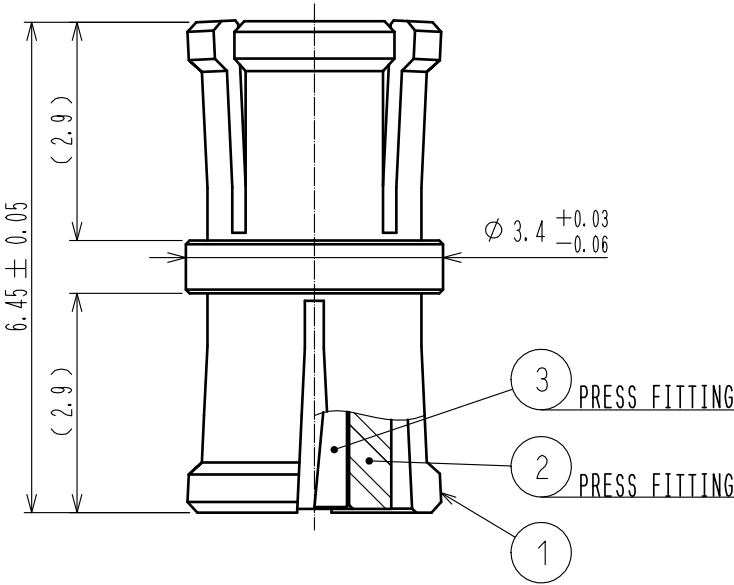

RoHS Compliant

2	PTFE		3	BERYLLIUM COPPER	GOLD PLATING
1	BERYLLIUM COPPER	GOLD PLATING			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 10: 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED
HIROSE ELECTRIC CO., LTD.		APPROVED : KY. SHIMIZU	16. 11. 07	DRAWING NO.	EDC-364312-00-00
		CHECKED : TO. KATAYAMA	16. 11. 05	PART NO.	SMP-A-JJ-645-18G
		DESIGNED : RO. YOKOYAMA	16. 11. 05	CODE NO.	CL338-1005-0-00
		DRAWN : RO. YOKOYAMA	16. 11. 05		1/1