

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT — By —

LOC

	DIST
--	------

REVISIONS

[illegible]

LTR

DESCRIPTION

DATE _____

	DWN
--	-----

APVD

BA 1

REVISÉ PER ECO-11-005150



21MAR11

RK

HMR

Technical Specification

Dissipation at 25°C	10 Watts Mounted on std heatsink
BS Ohmic Range	R01 to 10K
Stability	$\Delta R \leq 1\%$ per 1000hrs
Isolation Voltage	1400V DC/AC pk
Max Working Voltage	160 V DC/AC rms
Temp Coefficient	$<100R \pm 50 \text{ ppm}/^{\circ}\text{C}$ $>100R \pm 30 \text{ ppm}/^{\circ}\text{C}$
Climatic Category	55/200/56

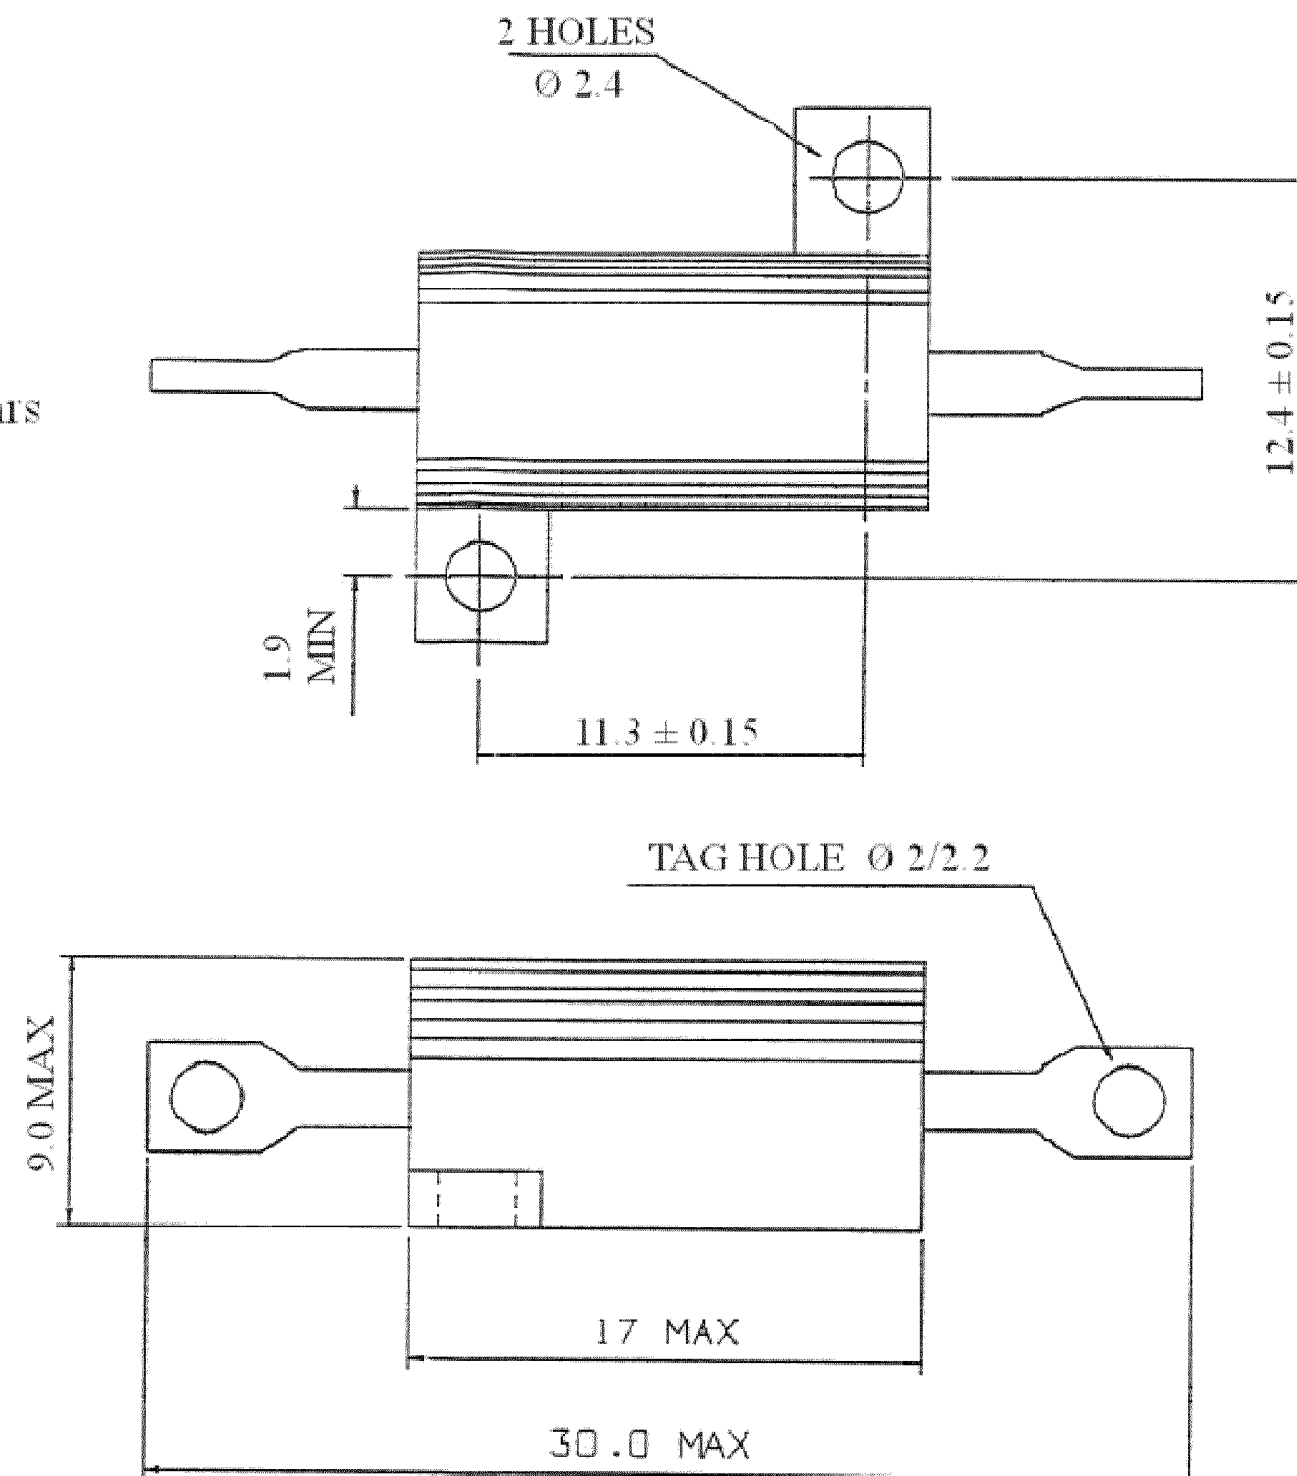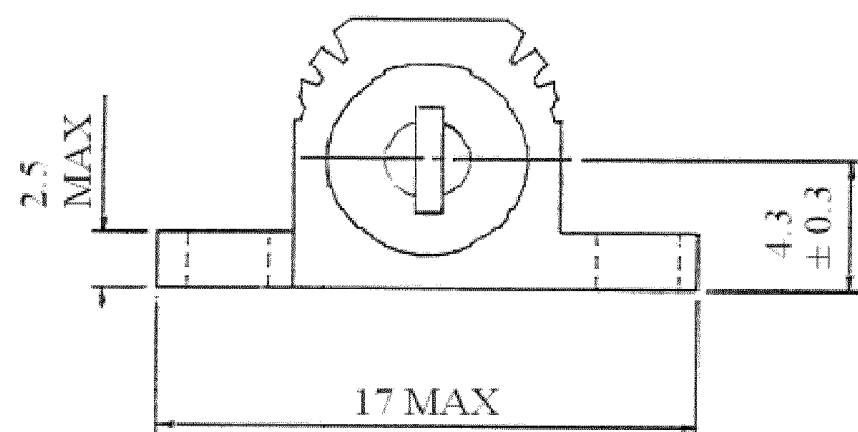

RoHS Compliant

FOR A SPECIFIC PN FOR A RESISTANCE VALUE
AND TOLERANCE, PLEASE REFER TO DMF.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	19SEPT06
-----	----------

R BLANCH	
CHK	19SEPT06

J CATCHPOLE
APVD 19SEPT06

J CATCHPOLE PRODUCT CODE	100217100
--	------------------

PRODUCT SPEC

APPLICATION SPEC

—

NAME	THS10 METAL CLAD RESISTOR
------	---------------------------

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
------	-----------	------------	---------------

Λ 3 00778 C = 1879073 —