
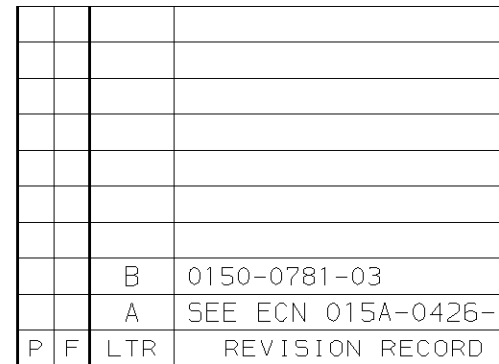


- 2. GREASE RAM, CAM, CAM FOLLOWER AND FEED ROD LIGHTLY.
- 3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
- 4. INSULATION RANGE QUOTED IS SPECIFIC TO ORIGINAL CUSTOMER, ACTUAL PRODUCT INSULATION RANGE IS 1.20-1.70 [0.047-.067 IN].

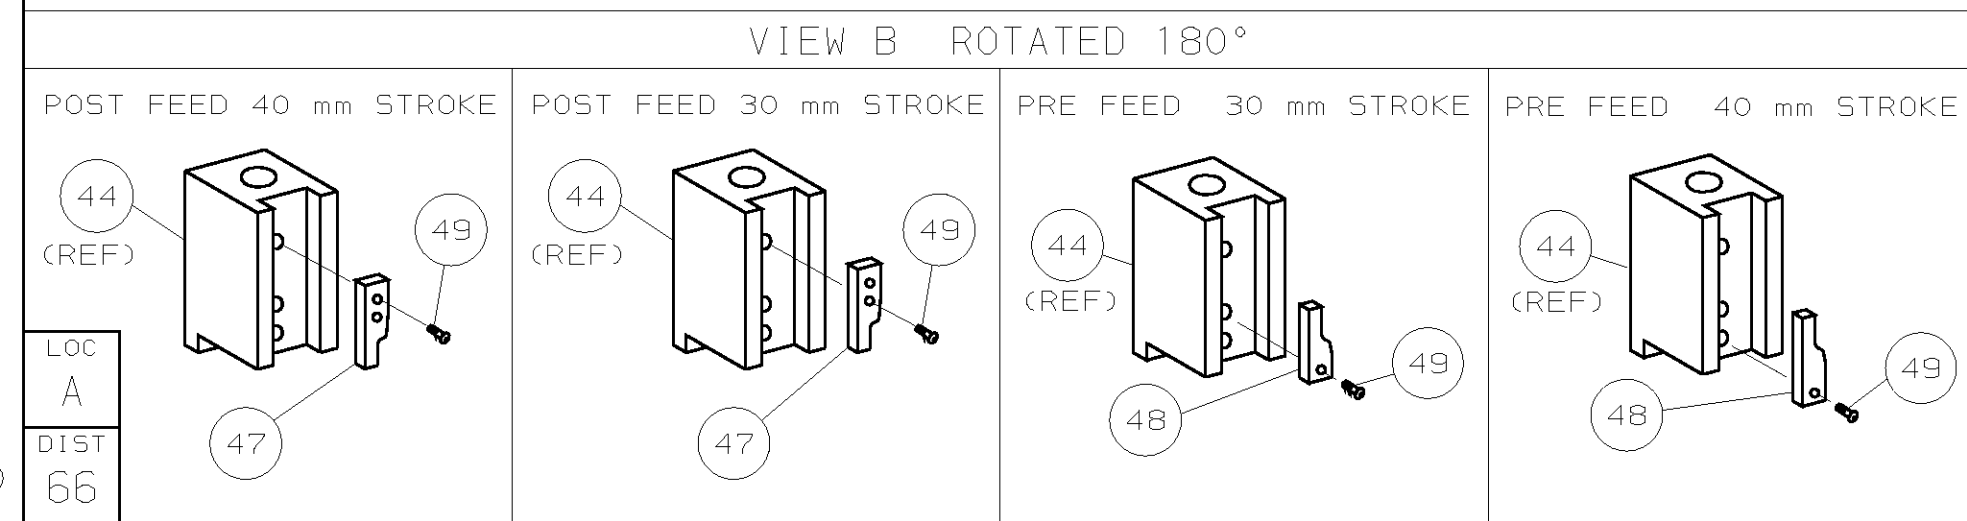

		DIMENSIONS: mm [INCHES]		MATERIAL		HT TR		FIN		
		DO NOT SCALE PRINT.		-		-		-		
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DR 11APRO1		APP 11APRO1				
		1 PLC DEC ± 0.5 [0.02 IN]		M. CLIFFORD		F. BACKHURST				
		2 PLC DEC $\pm$		CHK -		REL 24-05-01		 AMP Incorporated Harrisburg, Pa 17105-3608		
		3 PLC DEC $\pm$				M. CLIFFORD				
RK	JUL03	ANGLE:		NAME				MACHINE REF		
MC	MAY01	SURF TEXTURE: $\checkmark$		SIDE FEED HD-I APPLICATOR				HD-I APPL		
APP	DATE	REMOVE BURRS, BREAK SHARP EDGES R.38 MAX		SCALE -		DWG NO 1426189		SHEET 1 OF 1		
		CASE CODE 00779		CUSTOMER AND ASSEMBLY DRAWING					RESTRICTED TO -	