

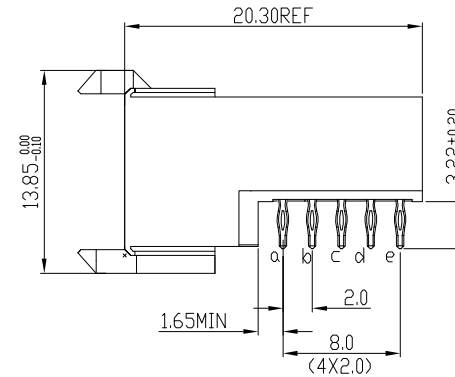
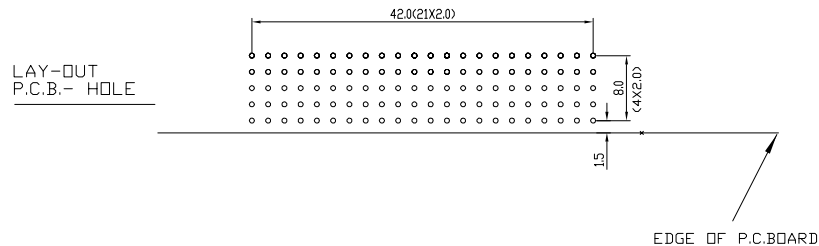


Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriete de c FCI. Droits de reproduction FCI.

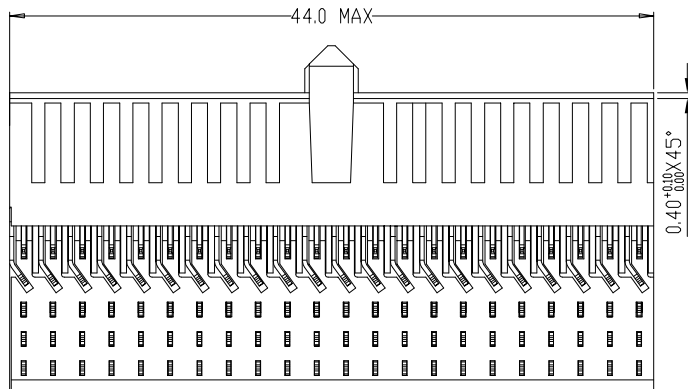

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

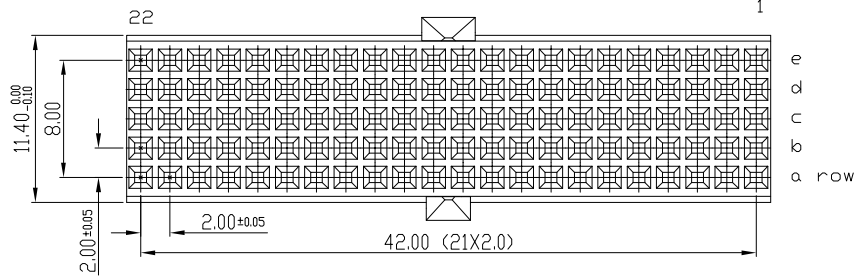

PERFORMANCE CHARACTERISTICS

CURRENT RATING: 1.5 A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)
RATED VOLTAGE: 500 V AC (CONT /CONT)
OPERATING TEMPERATURE : -55°C TO 125°C
CONTACT RESISTANCE : 20 mΩ MAX
INSERTION FORCE: 0.75N MAX/CONT
EXTRACTION FORCE : 0.15N MIN /CONT
INSULATION RESISTANCE: 10¹⁰ MΩ MIN

NOTES

1. LEAD FREE INDICATOR :LF=LEAD FREE
2. THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.
- 3.FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
- 4.THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

rev	ecn no	dr	date
A	conversion version 13	KN	14-09-01
B	ECB10088	MF	20-10-01
C	I05-0082	ALEX	01-06-05
D	DG05-0278	Kason	02-08-05
E	DG07-0362	Kason	05-09-07
F	DG10-0110	NZ	05-30-10

Material			Spec ref		
Mat code			✓	tolerance	projection
Heattreat				1DEC±0.2 1DEC 2DEC ± 0.1 2DEC ANGLES±1° HOEKEN	MM
Plating/Finish					
Dr	N.OTTO	06-05-99	Product family		MILLIPICS
Eng			Model Name		ECN
Chr			Model Revision		REL Level
Appr					
		title			MPACS 5+2R RA RCP CONN TYPE AB
		dwg no			BS,C ,201418,041
		Rev.			F
Pro/E file		catalog no		HM2R66PA5100----	CUSTOMER
					sheet 1 of 1