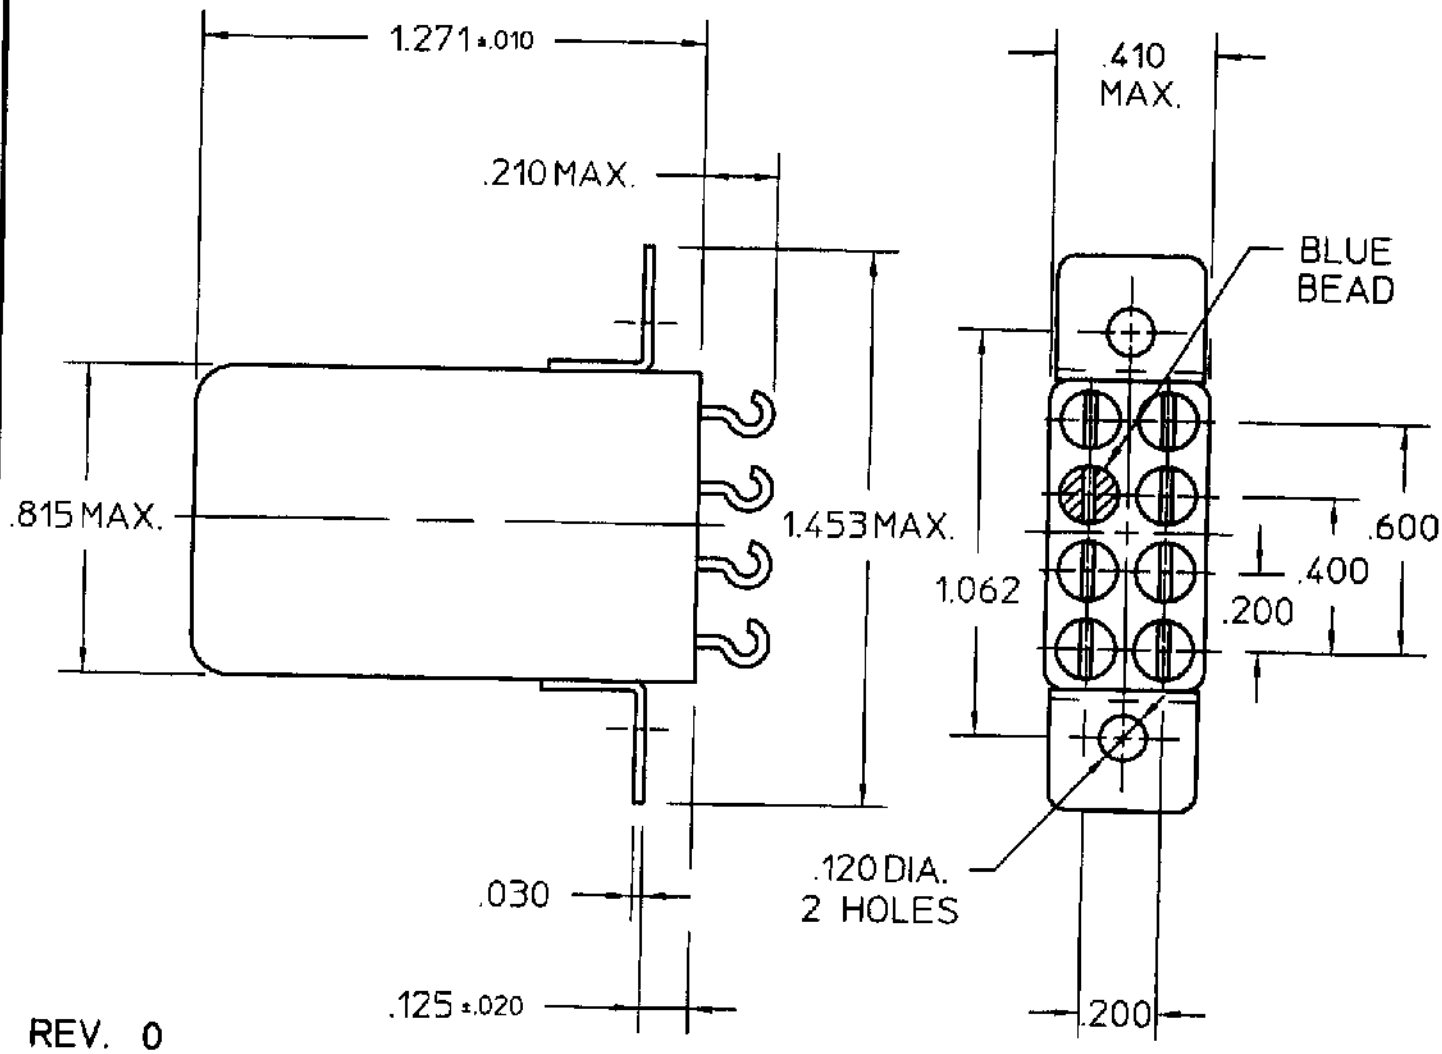

REV. 0
DCO 170339

COIL: @ 25°C
RESISTANCE 5000 OHMS ± 10%
NOMINAL VOLTAGE 6.0 mADC
MUST OPERATE 2.8 mADC
MUST RELEASE 1.4 mADC MAX, 0.3 mADC MIN

ENVIRONMENT:
VIBRATION 10 CPS TO 2000 CPS @ 15 g's
SHOCK 100 g's 6 MS. DURATION
TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 15 MS MAX.
RELEASE TIME 10 MS MAX.
CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

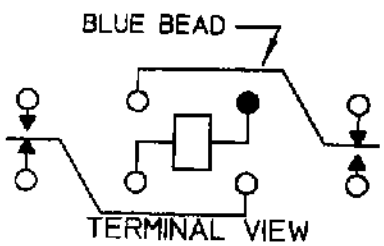

CONTACT RATING: 2 AMPS 28 VDC
RESISTIVE 100,000 OPERATIONS

DR. PBB 12/6/00 CK. TLG 12-6-00

CII Technologies™
advanced control electronic solutions

CUST. QPL
CUST. NO. M5757/13-090 REV.

3SAT RELAY

3SAT1307A2

F-7-8 REV. 3