

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0464371210

Status:


Active

Overview:

EXTreme Ten60Power™ High-Current Connector

Description:

EXTreme Ten60Power™ 8mm, Right Angle Single Power Blade, 1 Circuit, Press-Fit Tail

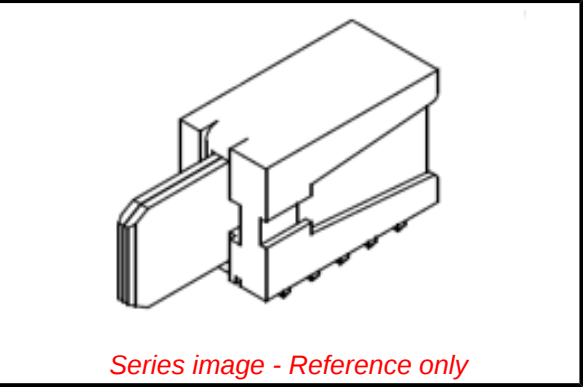

Series image - Reference only

Documents:

Drawing (PDF)

Product Specification PS-46436-100 (PDF)

Application Specification AS-46436-100 (PDF)

Packaging Specification PK-46437-001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	PCB Headers
Series	46437
Application	Board-to-Board, Power
Comments	See PS-46436-100 for details
Overview	EXTreme Ten60Power™ High-Current Connector
Product Name	EXTreme Ten60Power™
UPC	884982568495
Physical	
(p)ower-(s)ignal Configuration	1p - 0s
Breakaway	No
Circuits (Loaded)	1
Circuits (maximum)	1
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Compliant	No
Guide to Mating Part	Yes
Keying to Mating Part	None
Lock to Mating Part	No
Mated Height	18.00mm
Material - Metal	Copper
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	1.000/g
Number of Rows	1
Orientation	Right Angle
PC Tail Length	2.84mm
PCB Locator	Yes
PCB Retention	None
PCB Thickness - Recommended	1.58mm
Packaging Type	Tray
Pitch - Mating Interface	N/A
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	No
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40°C to +105°C

EU ELV

Not Reviewed

EU RoHS

China RoHS

Not Reviewed

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS	Not Reviewed
ELV	Not Reviewed

Search Parts in this Series

46437 Series

Mates With

46562-9001 EXTreme Ten60Power™

Receptacle

Termination Interface: Style	Through Hole - Compliant Pin
Electrical	
Current - Maximum per Contact	2.5A, 60.0A
Voltage - Maximum	600V AC / 250V DC
Material Info	
Reference - Drawing Numbers	
Application Specification	AS-46436-100
Packaging Specification	PK-46437-001
Product Specification	PS-46436-100
Sales Drawing	SD-46437-1210

This document was generated on 06/17/2016

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION