

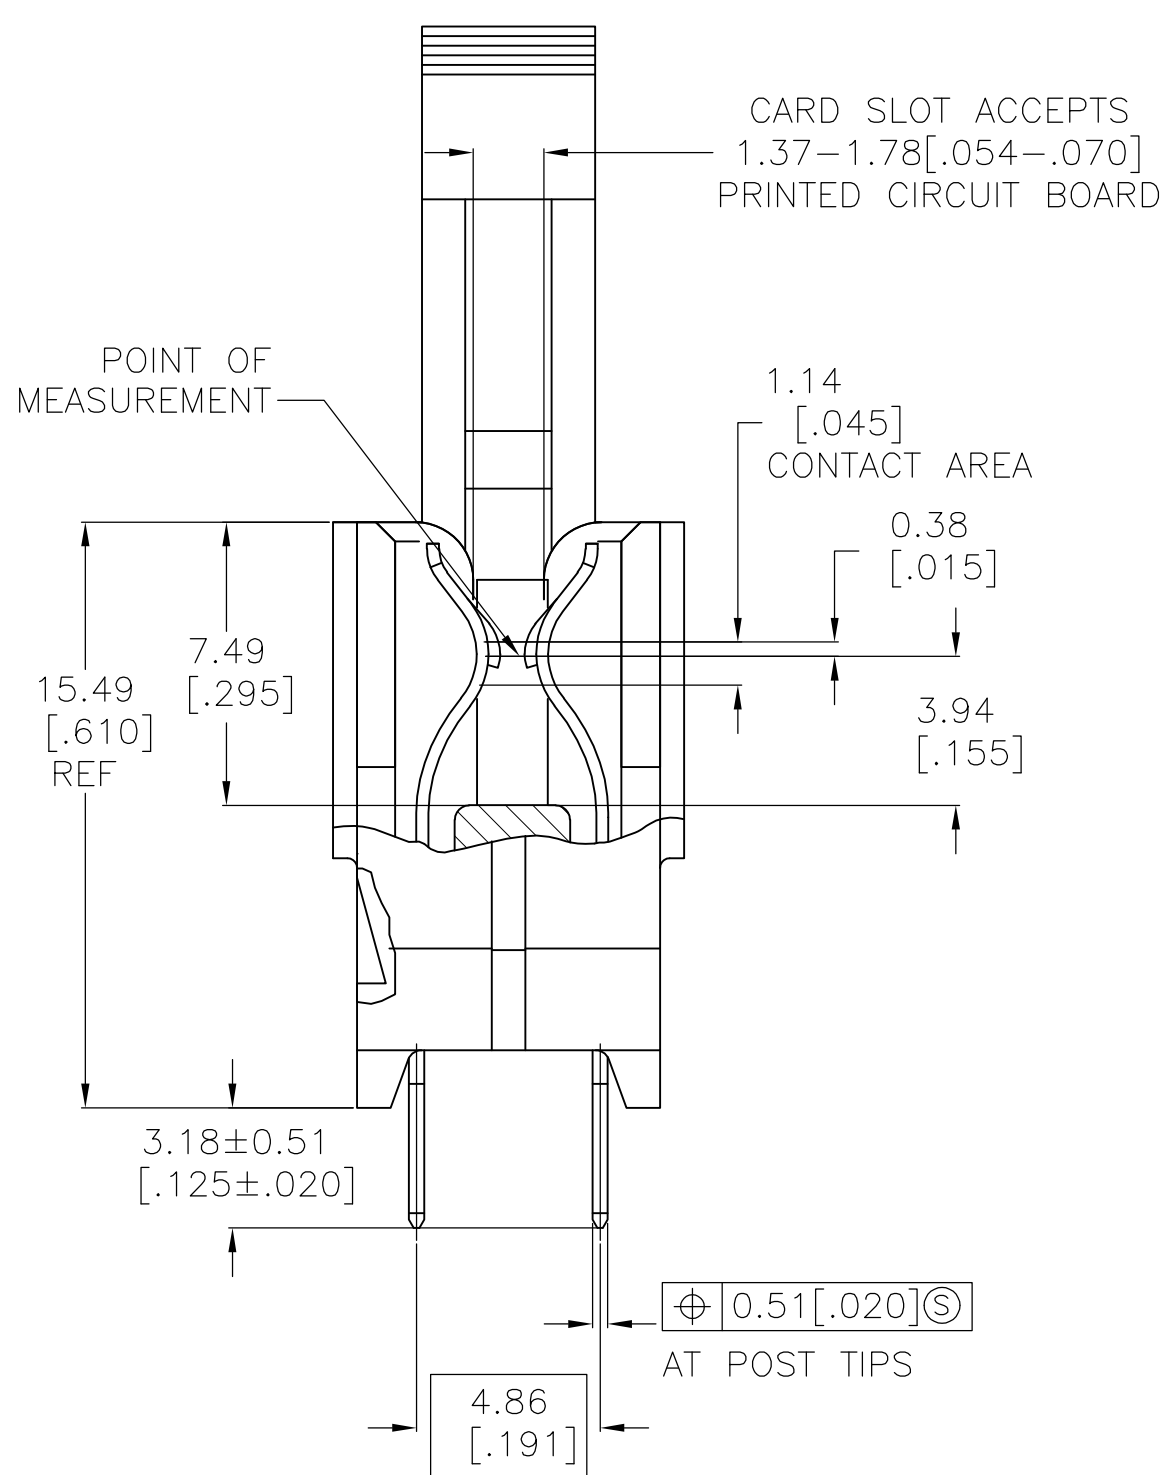
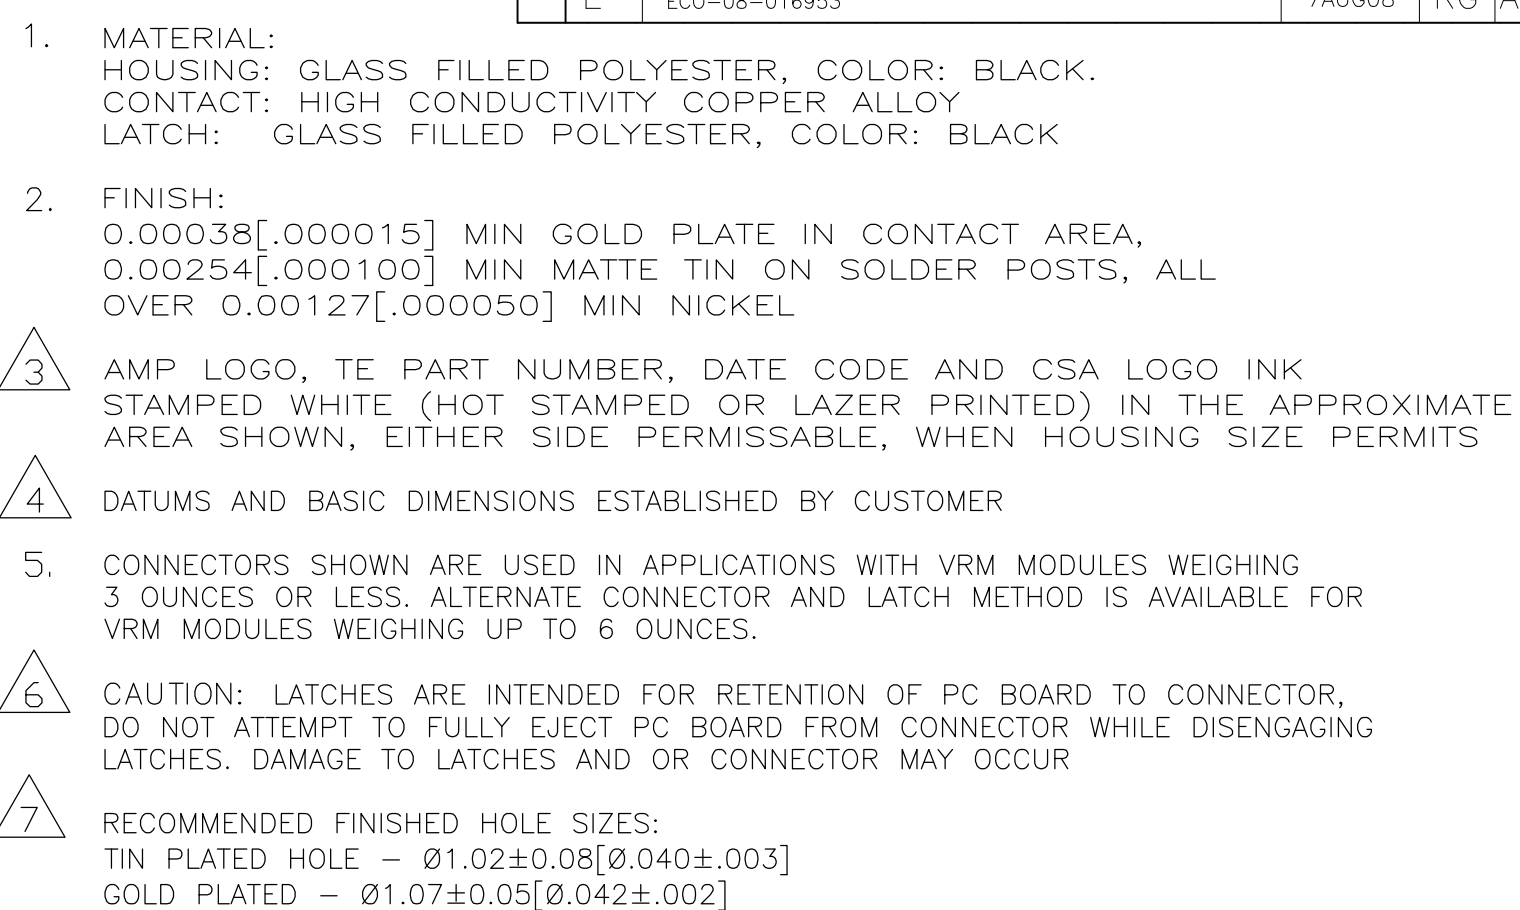


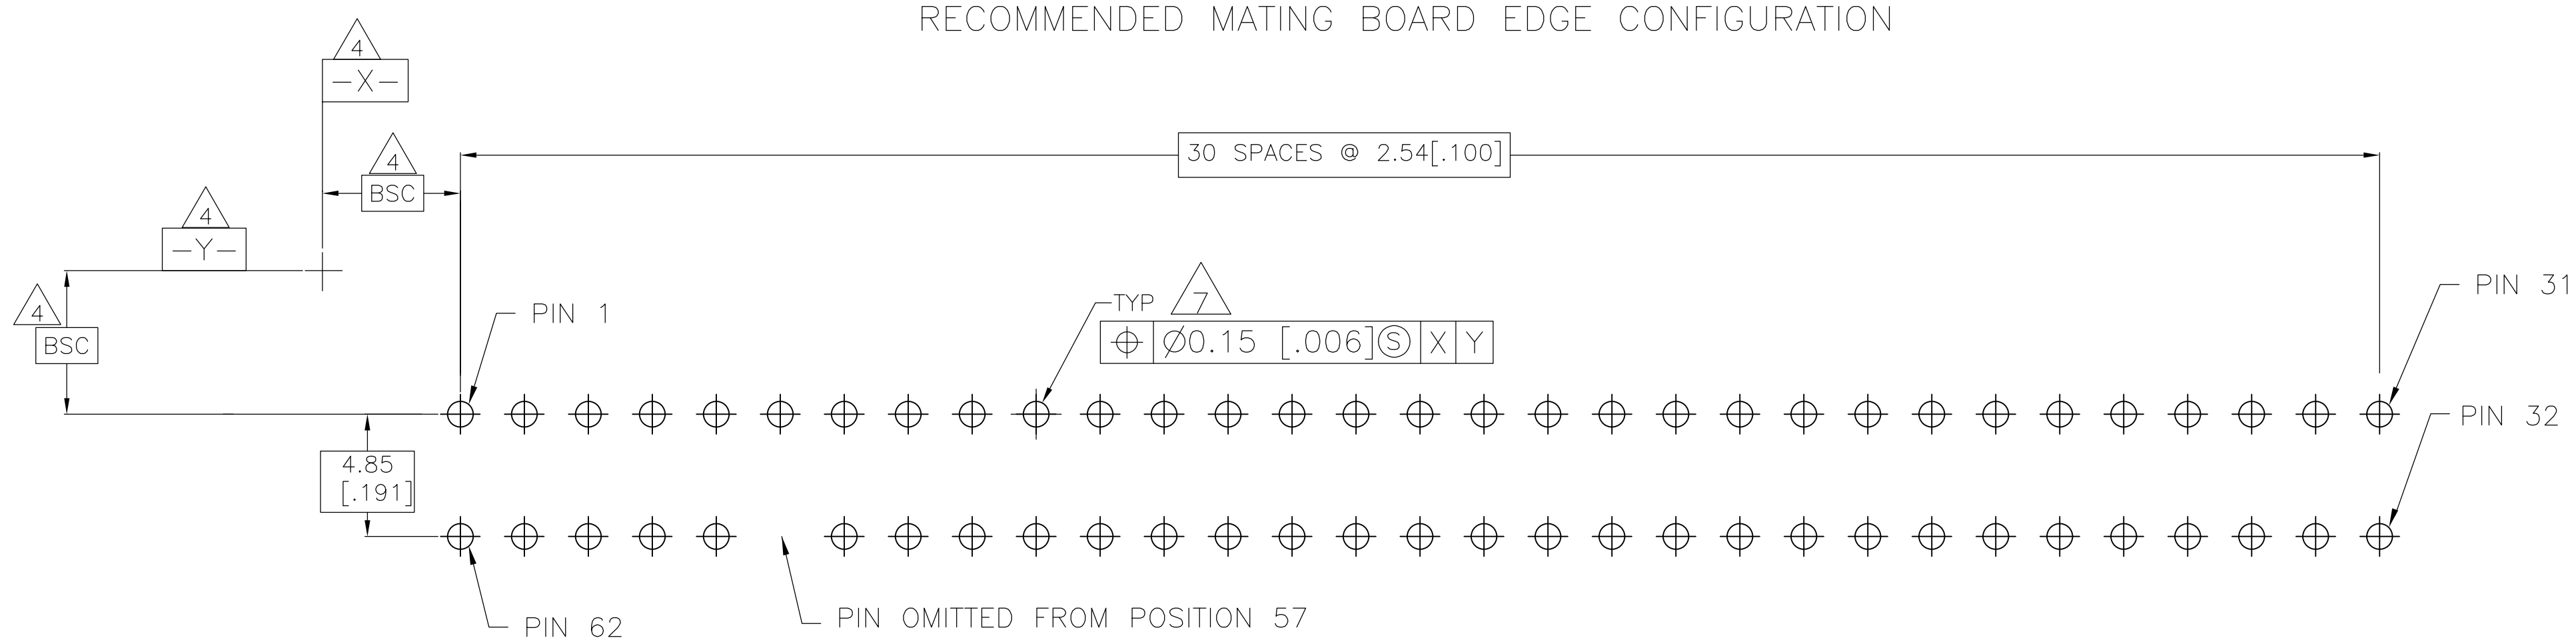

OBSOLETE	6489651-4
OBSOLETE	6489651-3
	PART NUMBER

69.67 [2.743]	11.18 [.440]	8.89 [.350]	9.1, +48v	6	4, 5	2, 3, 29, 30, 33, 34, 60, 61	31	6489651-2
49.35 [1.943]	31.50 [1.240]	29.21 [1.150]	9.1, +12v		62, 13			6489651-1
C	B	A	VRM DESIGNATION		OMIT PIN AND HOLE	MOLDED KEY BETWEEN PINS	RETENTION LOCATION	NO OF DUAL POSN
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN JAWF / A. MAYER CHK A.W.FRANTUM APPROV S. FLICKINGER	04MAR2008 04MAR2008 04MAR2008	Tyco Electronics Corporation Harrisburg, PA 17105-3608 Tyco Electronics		
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		CONNECTOR ASSEMBLY, HIGH CURRENT CARD EDGE, DUAL POSITION, 2.54[.100] CENTERLINE		
		0 PLC ± 1 PLC ± 2 PLC ± 0.13[.005] 3 PLC ± 4 PLC ± 5 ANGLES ± ± FINISH		PRODUCT SPEC 108-9039-2 APPLICATION SPEC 114-13018 WEIGHT —		SIZE A1 100779		RESTRICTED TO —
MATERIAL SEE NOTE 1		FINISH SEE NOTE 2		CUSTOMER DRAWING		DRAWING NO C-6489651		SCALE 5:1
						SHEET 1 OF 2		REV E



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 04MAR2008 AWE/L.A.MAYER CHK 04MAR2008 A.W.FRANTUM APVD 04MAR2008 S.FLOCKINGER		 Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 10 PLC ± 1 PLC ± 0.13[.005] 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± 2°		NAME CONNECTOR ASSEMBLY, HIGH CURRENT CARD EDGE, DUAL POSITION, 2.54[.100] CENTERLINE	
		PRODUCT SPEC 108-9039-2 APPLICATION SPEC 114-13018		SIZE CAGE CODE DRAWING NO A1 00779 C-6489651	
MATERIAL SEE NOTE 1		FINISH SEE NOTE 2		RESTRICTED TO —	
CUSTOMER DRAWING		SCALE 5:1		SHEET 2 OF 2	
				REV F	