


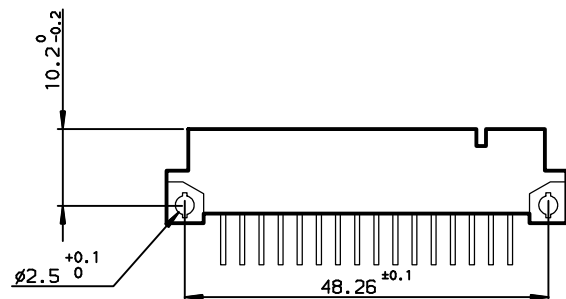


DIMENSIONS

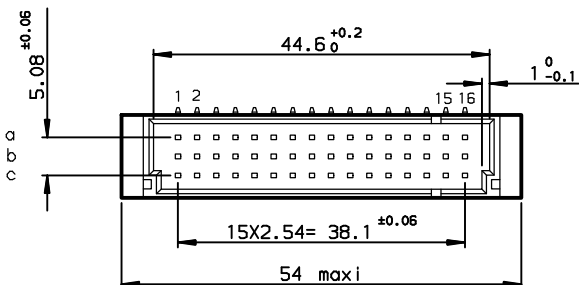

TERMINATION

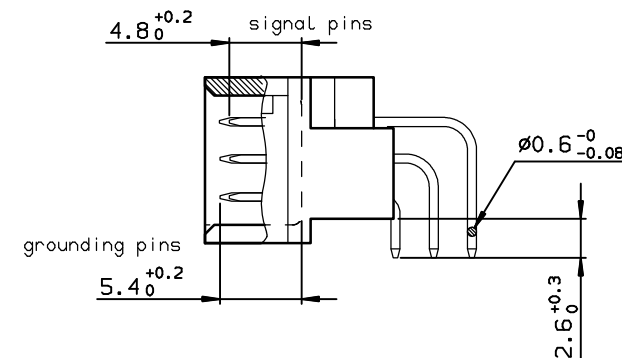

TIN LEAD PART NUMBER

PART NUMBER


86093487313765619E1

LEAD FREE PART NUMBER

PART NUMBER

86093487313765BBLF

P.C. CARD DRILLING (Component side view)

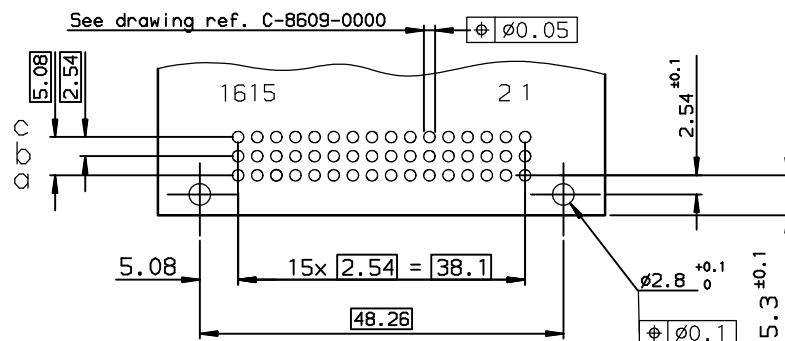

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000A

European Views

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection mm	size A3	Scale 1.5
TOLERANCES UNLESS OTHERWISE SPECIFIED		ANGULAR	LINEAR	0.X	±0.1	size
0.XX		0.XX	±0.1	0.XXX	±0.1	ECN
0.XXX		0.XXX	±0.1	0.XXX	±0.1	LS06-0095
Product family		DIN 8609		Spec ref -		
title		STANDARD MALE 3 ROW		48 CONTACTS		Rev.
catalog no		-		C-8609-0891		C
CUSTOMER		-		sheet 1 of 1		

SPECIFICATION 619 = 6 grounding pins in position :
OR SPECIFICATION BB = row:a-b-c position 1 and 16

rev	ecn no	dr	date
A	-	-	2001/02/01
B	LS05-001	JTA	2005/03/05
C	LS06-0095	LGO	2006/06/28
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-