

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0757830343

Status:


Active

Overview:

iPass™ Connector System

Description:

iPass™ I/O Surface Mount Receptacle, 0.80mm Pitch, Right Angle, Internal Assembly with Shell, 68 Circuit, 0.76µm Gold (Au), Through-Hole Shell Option, Tail Length 2.79mm, Dual Key

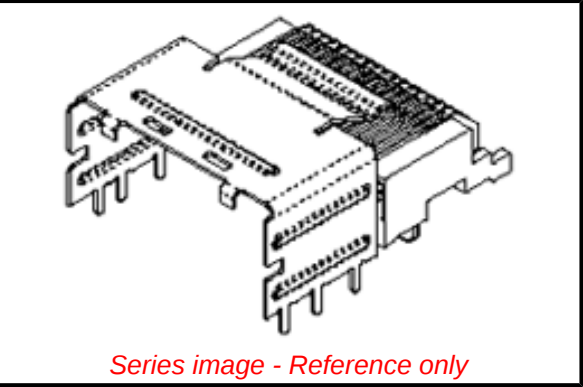

|                                                          |                                                              |
|----------------------------------------------------------|--------------------------------------------------------------|
| Documents:                                               |                                                              |
| <a href="#">3D Model</a>                                 | <a href="#">Application Specification AS-75783-001 (PDF)</a> |
| <a href="#">Drawing (PDF)</a>                            | <a href="#">Packaging Specification PK-75783-001 (PDF)</a>   |
| <a href="#">Product Specification PS-75783-001 (PDF)</a> | <a href="#">RoHS Certificate of Compliance (PDF)</a>         |

|                                |                                                  |
|--------------------------------|--------------------------------------------------|
| Agency Certification           |                                                  |
| CSA                            | LR19980                                          |
| UL                             | E29179                                           |
| General                        |                                                  |
| Product Family                 | I/O Connectors                                   |
| Series                         | 75783                                            |
| Application                    | Wire-to-Board                                    |
| Comments                       | Positive or passive latching cable available     |
| Component Type                 | Receptacle                                       |
| Electrical Model               | Yes                                              |
| Overview                       | <a href="#">iPass™ Connector System</a>          |
| Product Name                   | iPass™, Mini Multi-Lane, PCI Express*            |
| Type                           | N/A                                              |
| UPC                            | 800756839936                                     |
| Physical                       |                                                  |
| Circuits (Loaded)              | 68                                               |
| Circuits (maximum)             | 68                                               |
| Color - Resin                  | Black                                            |
| Durability (mating cycles max) | 250                                              |
| Flammability                   | 94V-0                                            |
| Gender                         | Female                                           |
| Keying to Mating Part          | Yes                                              |
| Lock to Mating Part            | None                                             |
| Material - Metal               | Copper-Nickel-Zinc, High Performance Alloy (HPA) |
| Material - Plating Mating      | Gold                                             |
| Material - Plating Termination | Tin                                              |
| Material - Resin               | High Temperature Thermoplastic                   |
| Net Weight                     | 4.672/g                                          |
| Orientation                    | Right Angle                                      |
| PC Tail Length                 | 2.79mm                                           |
| PCB Locator                    | Yes                                              |
| PCB Retention                  | Yes                                              |
| PCB Thickness - Recommended    | 2.36mm                                           |
| Packaging Type                 | Embossed Tape on Reel                            |
| Panel Mount                    | No                                               |
| Pitch - Mating Interface       | 0.80mm                                           |
| Pitch - Termination Interface  | 0.80mm                                           |
| Plating min - Mating           | 0.762µm                                          |
| Plating min - Termination      | 2.540µm                                          |
| Polarized to Mating Part       | Yes                                              |
| Ports                          | 1                                                |
| Surface Mount Compatible (SMC) | Yes                                              |
| Temperature Range - Operating  | -40°C to +80°C                                   |

|                                                                                               |              |
|-----------------------------------------------------------------------------------------------|--------------|
| EU ELV                                                                                        |              |
| Not Relevant                                                                                  |              |
| EU RoHS                                                                                       | China RoHS   |
| Not Reviewed                                                                                  |              |
| REACH SVHC                                                                                    |              |
| Not Reviewed                                                                                  |              |
| Halogen-Free                                                                                  |              |
| Status                                                                                        |              |
| Not Reviewed                                                                                  |              |
| Need more information on product environmental compliance?                                    |              |
| Email <a href="mailto:productcompliance@molex.com">productcompliance@molex.com</a>            |              |
| Please visit the <a href="#">Contact Us</a> section for any non-product compliance questions. |              |
| China ROHS                                                                                    | Not Reviewed |
| ELV                                                                                           | Not Relevant |

Search Parts in this Series

75783 Series

Use With

iPass™ Cable Assemblies, [79575](#) , [79576](#) , [74562](#) , [74563](#) , [79536](#) , [74573](#) ,

|                                    |                 |
|------------------------------------|-----------------|
| Termination Interface: Style       | Surface Mount   |
| Waterproof / Dustproof             | No              |
| Wire Insulation Diameter           | N/A             |
| Wire Size AWG                      | N/A             |
| <b>Electrical</b>                  |                 |
| Current - Maximum per Contact      | 0.5A            |
| Grounding to Panel                 | None            |
| Voltage - Maximum                  | 30V AC (RMS)/DC |
| <b>Material Info</b>               |                 |
| <b>Reference - Drawing Numbers</b> |                 |
| Application Specification          | AS-75783-001    |
| Electrical Model Document          | EE-75586-001    |
| Packaging Specification            | PK-75783-001    |
| Product Specification              | PS-75783-001    |
| S-Parameter Model                  | SP-75586-001    |
| Sales Drawing                      | SD-75783-001    |

\*PCI Express is a registered trademark of PCI-SIG®.