


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AA	00		C1	REVISED PER ECO-11-004835	11MAR11	RK	HMR

D

C

B

A

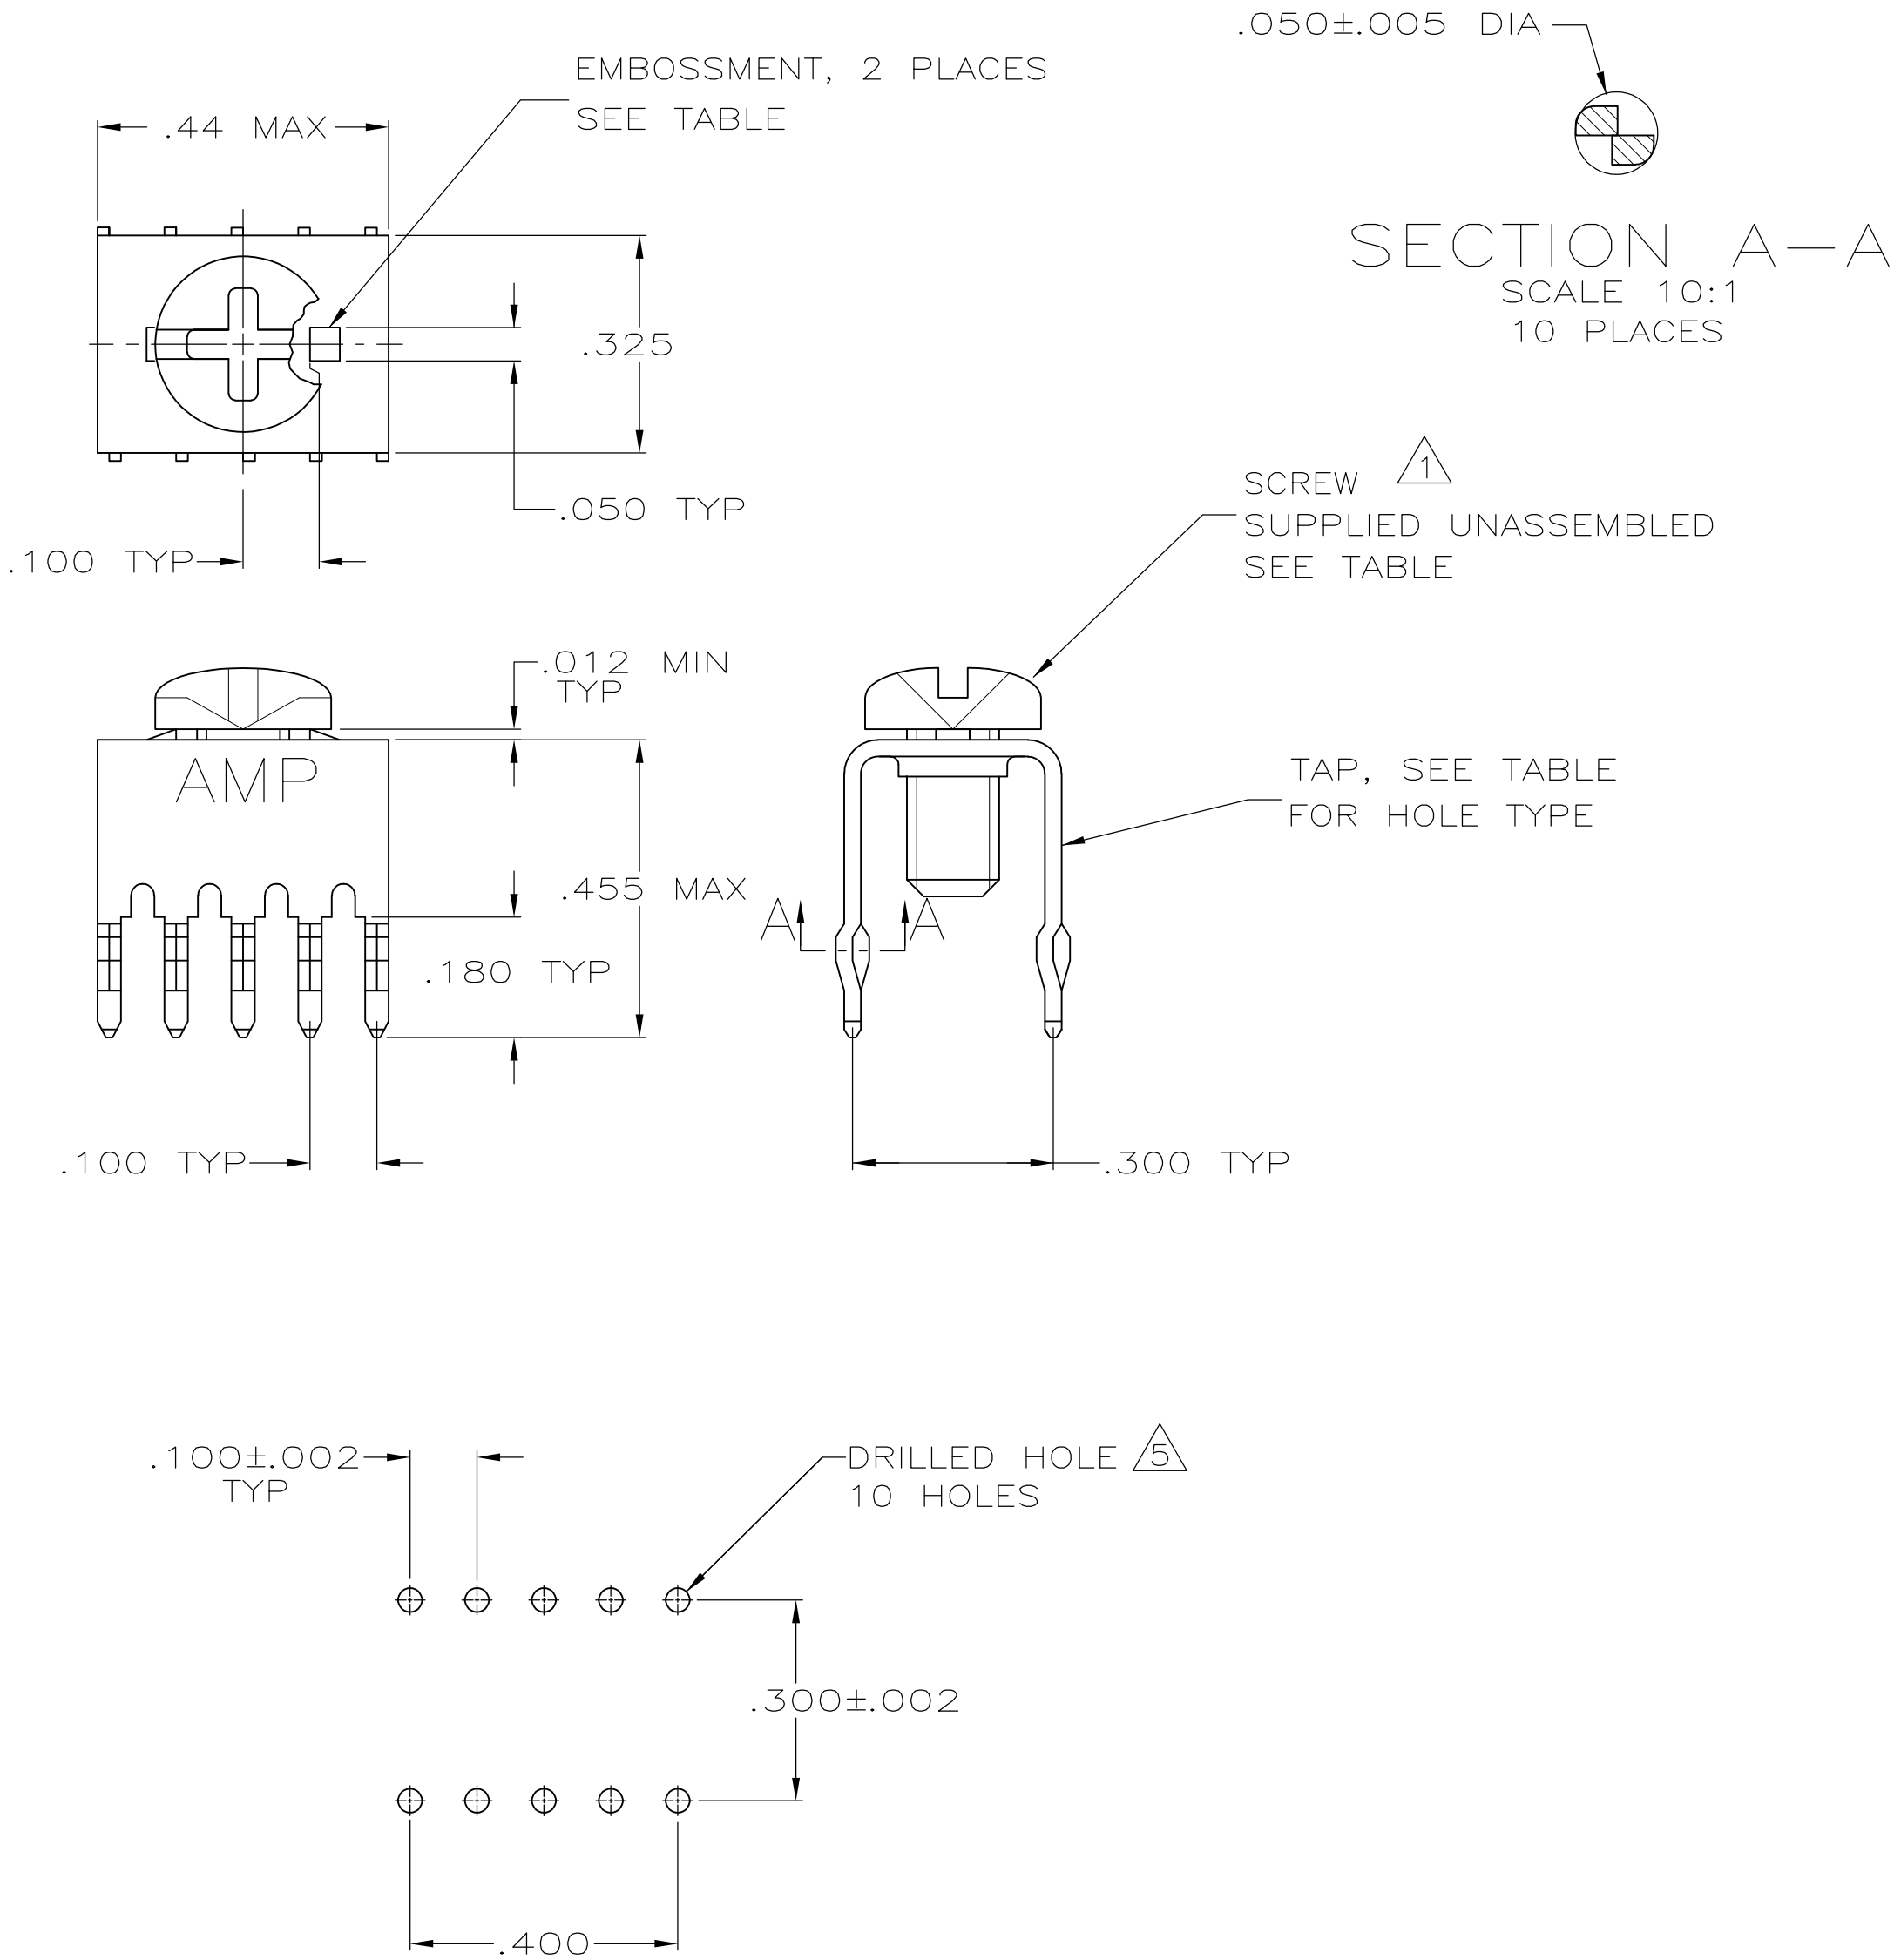

- ¹ TO PREVENT THREAD STRIPPING, SCREW TORQUE SHOULD NOT EXCEED 9 IN LBS.
- ² TAP HOLE IS 6-32UNC-2B, TWO MIN THREADS.
- ³ TAP HOLE IS M4 X 0.7, TWO MIN THREADS.
- ⁴ TAP: .000020-.000120 MATTE TIN OVER .000050 NICKEL.
- ⁵ REFERENCE APPLICATION SPECIFICATION 114-11000 FOR DRILL HOLE SIZES AND FINISHES.

⁴	³	NO	YES	1-505558-1
⁴	²	NO	NO	505558-7
⁴	²	993879-1	YES	505558-4
⁴	²	NO	YES	505558-3
FINISH	HOLE TYPE	SCREW	EMBOSSMENT	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. ALCORTA - 05-04-05 CHK A. FRANTUM 05-04-05 APVD S. FLICKINGER 05-04-05	TE Connectivity			
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC 108-11030	NAME TAP, POWER DISTRIBUTION			
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .008 4 PLC ± - ANGLES ± - FINISH ⁴	APPLICATION SPEC 114-11000	SIZE A2	CAGE CODE 00779	DRAWING NO C=5055558	RESTRICTED TO -
MATERIAL COPPER ALLOY 725.		WEIGHT -	CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 1
					REV C1	