

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

(C) COPYRIGHT

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD




E3

REVISED PER ECR-16-010553

05AUG2017

BW

SG

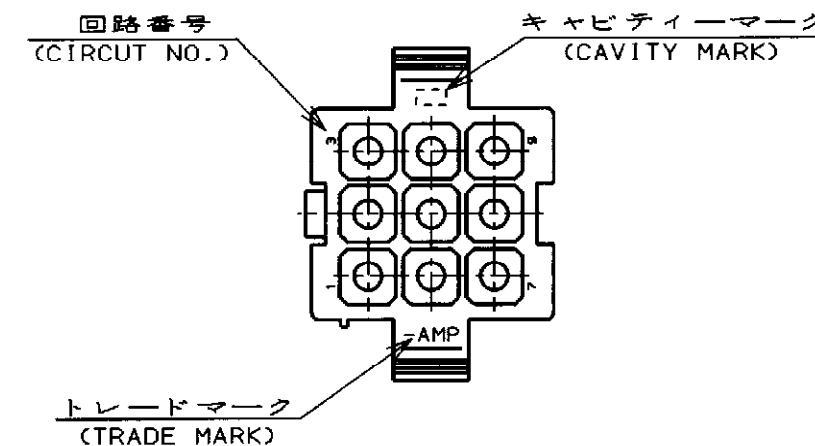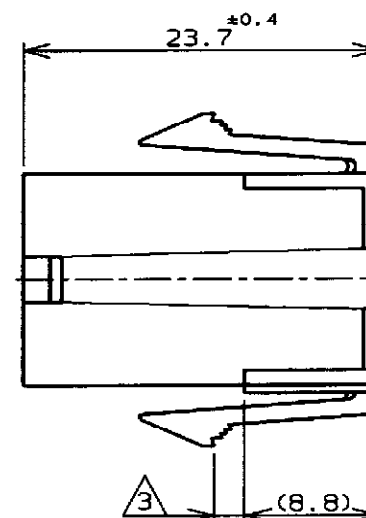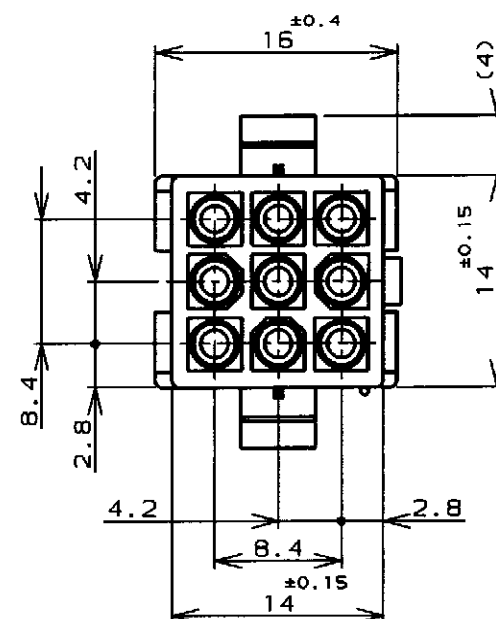


注記;

1. 使用端子型番は170359,170360,170361,170362
2. 嵌合相手ハウジング型番は172169
3. 通用パネル厚 0.8-2.0mm
4. 取付穴打抜方向とハウジングの挿入方向は同じとする。

NOTE;

1. APPLICABLE CONT P/N:170359,170360,170361,170362
2. MATING HSG P/N:172169
3. APPLICABLE PANEL THICKNESS:0.8~2.0mm
4. HOUSING INSERTION INTO THE PANEL CUT-OUT MUST BE DONE IN THE SAME DIRECTION WITH PUNCH KNOCKING.
5. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

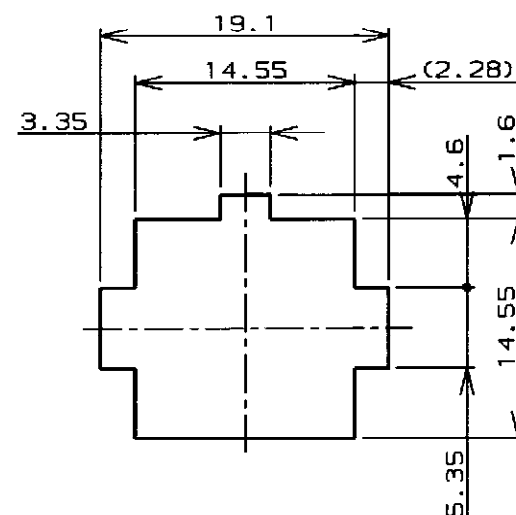


寸法公差は±0.20
(TOLERANCE: ±0.20)

パネル取付穴
(RECOMENDED PANEL OPENING DIMENSION)

5
OBSOLETE

黒 (BLACK)	1-172161-9
青 (BLUE)	1-6
緑 (GREEN)	1-5
赤 (RED)	1-2
自然色 (NATURAL)	172161-1
色 (COLOR)	型番 (P/N)
WIRE RANGE 適合電線断面積	INSULATION DIA 被覆外径

		DWN 8 JUN '98 N. YAMASAKI	TE TE Connectivity		
DIMENSIONS. 単位・精 mm		CHK 15 JUN '98 M. SHINDO	NAME 名称		
TOLERANCES UNLESS OTHERWISE SPECIFIED		APVD 15 JUN '98 M. SHINDO	9極ミニユニバーサルメイトンロックキャップハウジング (UL94V-0)		
一般公差 (GENERAL TOLERANCE)		PRODUCT SPEC 製品規格 108-5138	9Pos MINI UNIVERSAL MATE-N-LOCK CONN. CAP HOUSING (UL94V-0)		
		INSTRUCTION SHEET 取り扱い説明書 IS-105J	SIZE A3		RESTRICTED TO
MATERIAL 材料 66ナイロン UL94V-0 (66NYLON UL94V-0)		WEIGHT —//—	CAGE CODE 00779	DRAWING NO 書号 C= 172161	
FINISH 仕上 —//—		CUSTOMER DRAWING			
		SCALE 尺度 2-1		SHEET 1 OF 1	REV E3

参考図面