
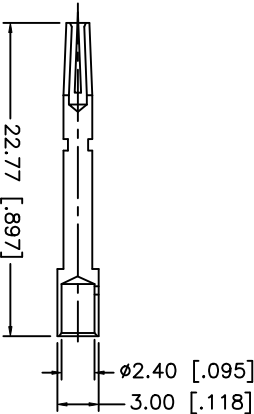
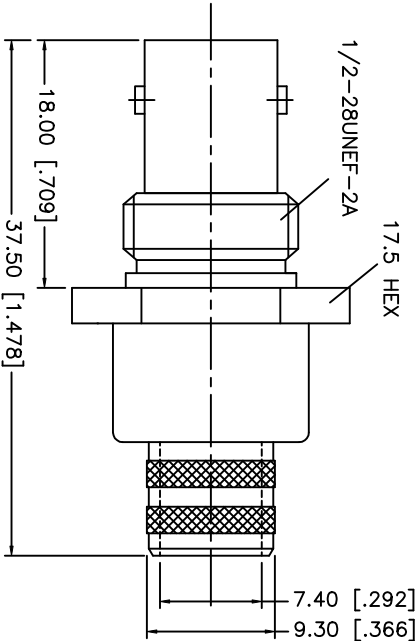
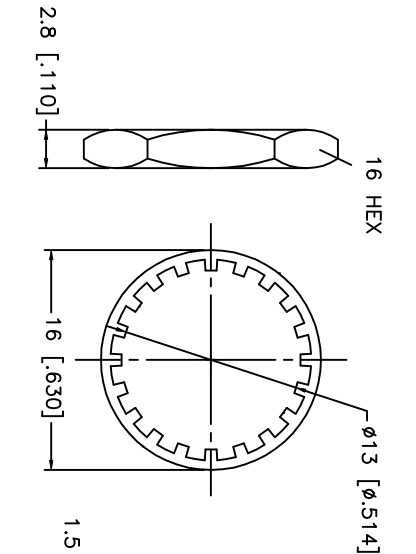
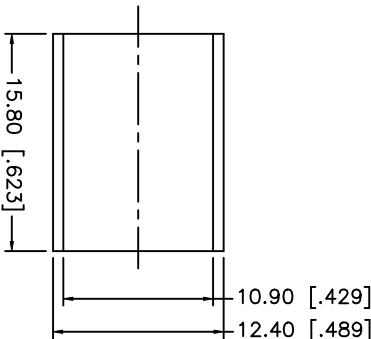
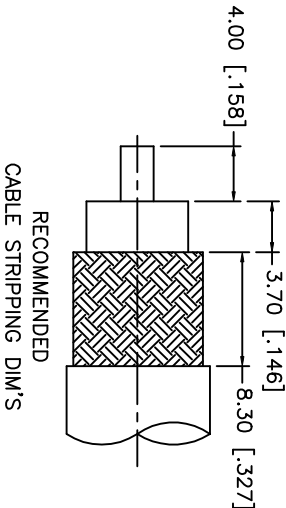


REV.	DATE	DESCRIPTION
NC	07/17/02	INITIAL RELEASE



- CRIMP NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .429"
 2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .100"
 2. MAX. PANEL THICKNESS = 3.5mm

9	FERRULE	COPPER	NICKEL	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS		APPROVALS		DATE		Amphenol - Connex CONNECTOR CORPORATION BNC BULKHEAD CRIMP JACK (FOR RG-213/U CABLE) TITLE									
8	CONTACT PIN	PHOS. BRONZE	GOLD																
7	HEX NUT	BRASS	NICKEL																
6	LOCK WASHER	BRASS	NICKEL																
5	GASKET	RUBBER	RED																
4	BARREL	BRASS	NICKEL																
3	INSULATOR	TEFLON	NATURAL	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .XXX = ± 0.005" .XX = ± 0.010" .X = ± 0.020"		DRAWN G.R.S.		07/17/02											
2	BODY	BRASS	NICKEL																
1	HOUSING	BRASS	NICKEL																
DESCRIPTION		MATERIAL		FINISH		DO NOT SCALE DRAWING				SIZE FSCM NO. 99001 DWG. NO. 112709.DWG REV. NC									
										SCALE NA PART NO. 112709 SHEET 1 OF 1									