

5




4

3

2


1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75.01-802

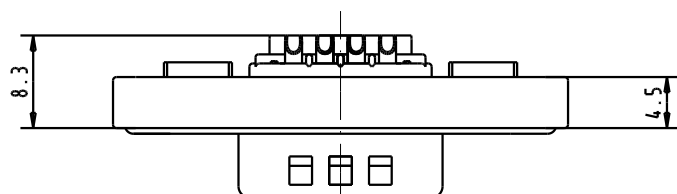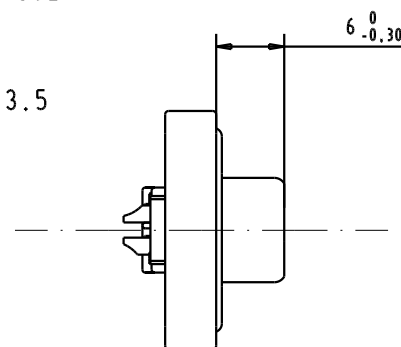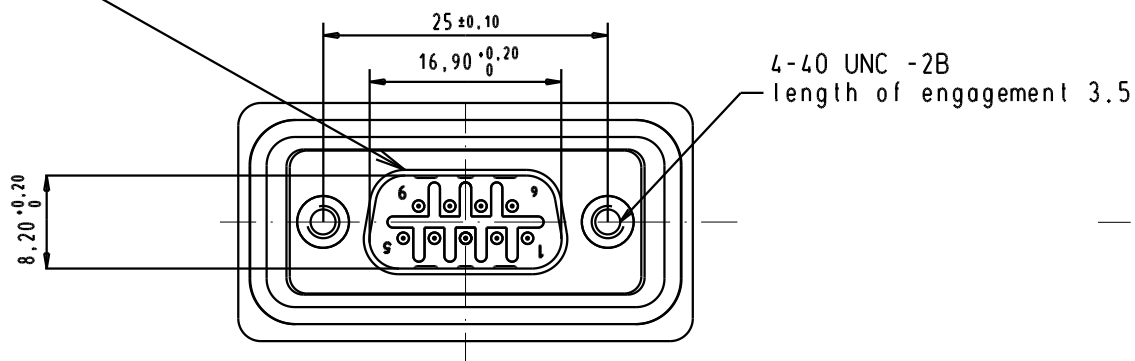

1) Protection standard IP 67 according to IEC 529 / DIN 40050.

2) Cable: AWG 20 max

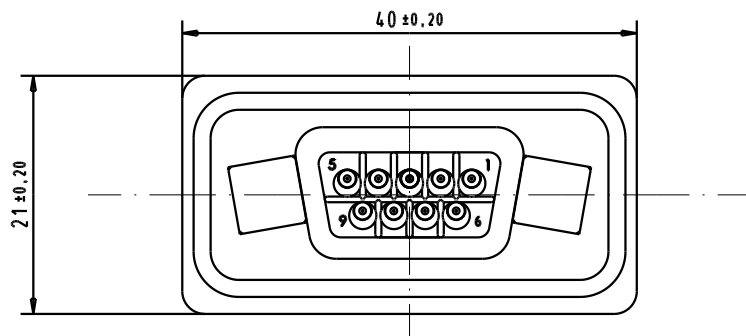


09 67 609 7615

Au plating 0,76 µm mini

Dat.

Name

D-SUB IP67 male 9 Poles
straight solder cup with
4-40 UNC nut and
metal rear frameMaßstab/
Scale

Detail. 10/10/03

S.H.

Insp.

Stand.

All Dim. in mm
Orig. Size DIN A 4HARTING ELEKTRONIK
F-95972 Paris

TB 09 67 609 7615

Blatt/ Page

Part Number

Performance Level

31559

10/10/03

S.H.

Mod.

Dat.

Name

Sub.