



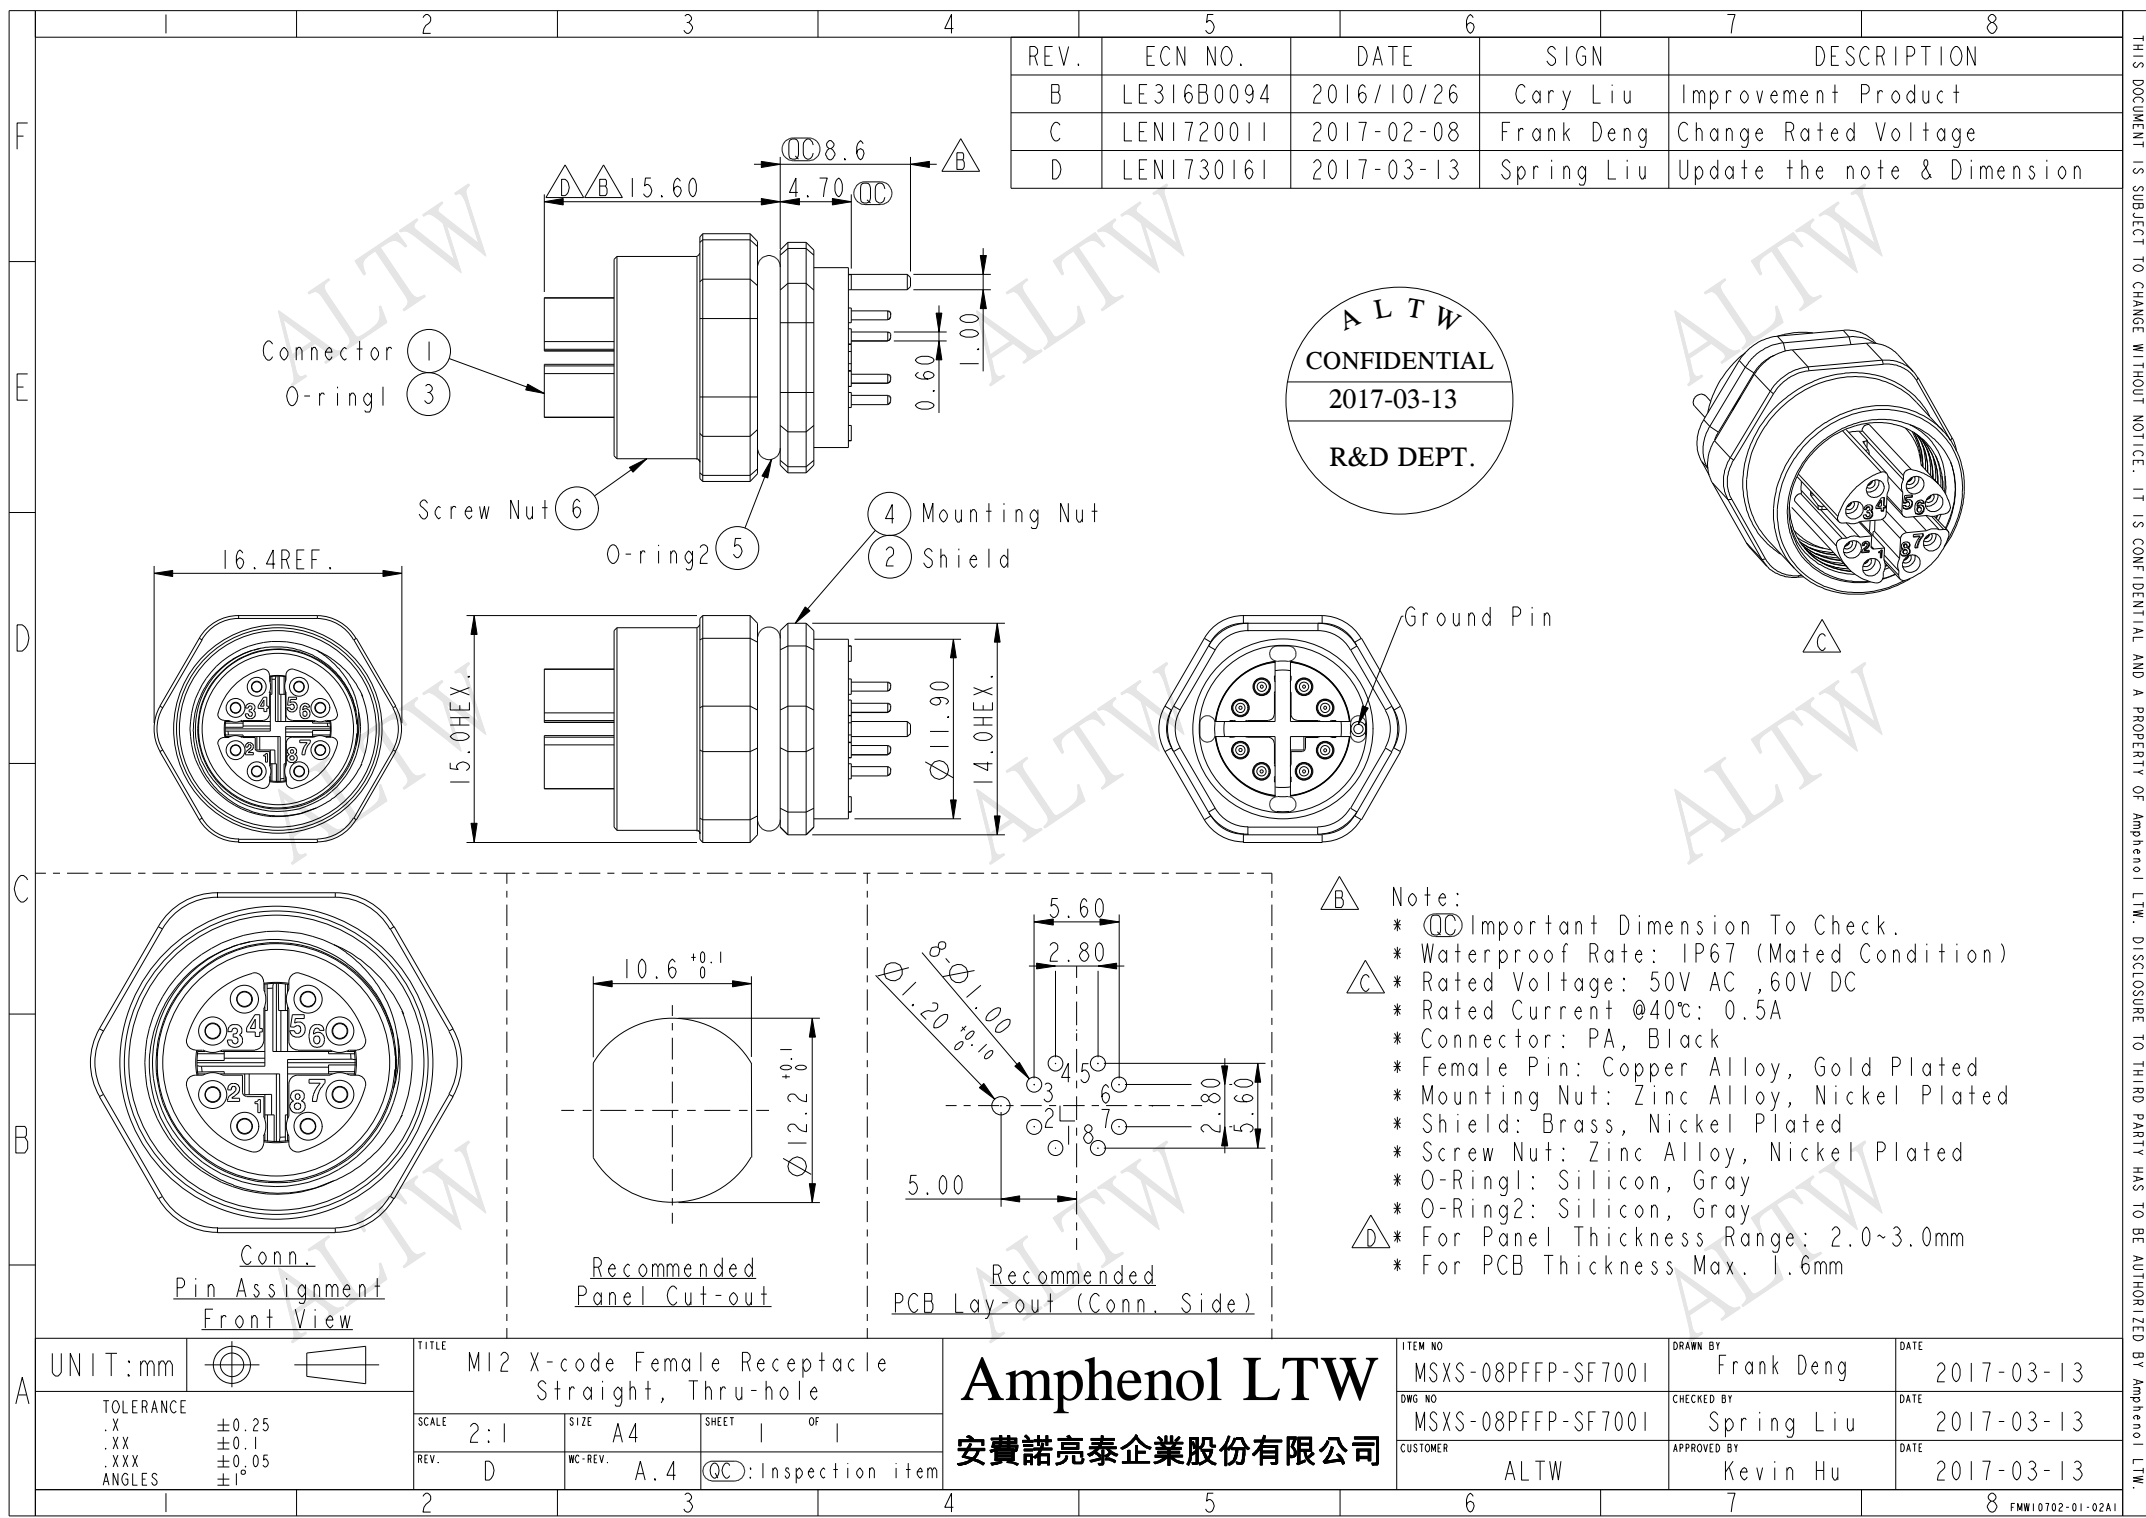

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE316B0094	2016/10/26	Cary Liu	Improvement Product
C	LEN1720011	2017-02-08	Frank Deng	Change Rated Voltage
D	LEN1730161	2017-03-13	Spring Liu	Update the note & Dimension

ALTW
CONFIDENTIAL
2017-03-13
R&D DEPT.



- Note:
- * CC Important Dimension To Check.
 - * Waterproof Rate: IP67 (Mated Condition)
 - * Rated Voltage: 50V AC ,60V DC
 - * Rated Current @40℃: 0.5A
 - * Connector: PA, Black
 - * Female Pin: Copper Alloy, Gold Plated
 - * Mounting Nut: Zinc Alloy, Nickel Plated
 - * Shield: Brass, Nickel Plated
 - * Screw Nut: Zinc Alloy, Nickel Plated
 - * O-Ring1: Silicon, Gray
 - * O-Ring2: Silicon, Gray
 - * For Panel Thickness Range: 2.0~3.0mm
 - * For PCB Thickness Max. 1.6mm

UNIT:mm		TITLE		ITEM NO		DRAWN BY		DATE	
		M12 X-code Female Receptacle Straight, Thru-hole		MSXS-08PFFP-SF7001		Frank Deng		2017-03-13	
TOLERANCE		SCALE	SIZE	SHEET	OF	DWG NO	CHECKED BY	DATE	
.X ±0.25		2:1	A4	1	1	MSXS-08PFFP-SF7001	Spring Liu	2017-03-13	
.XX ±0.1		REV.	WC-REV.	CC: Inspection item		CUSTOMER	APPROVED BY	DATE	
.XXX ±0.05		D	A.4			ALTW	Kevin Hu	2017-03-13	
ANGLES ±1°									

Amphenol LTW
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.