


Jul.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

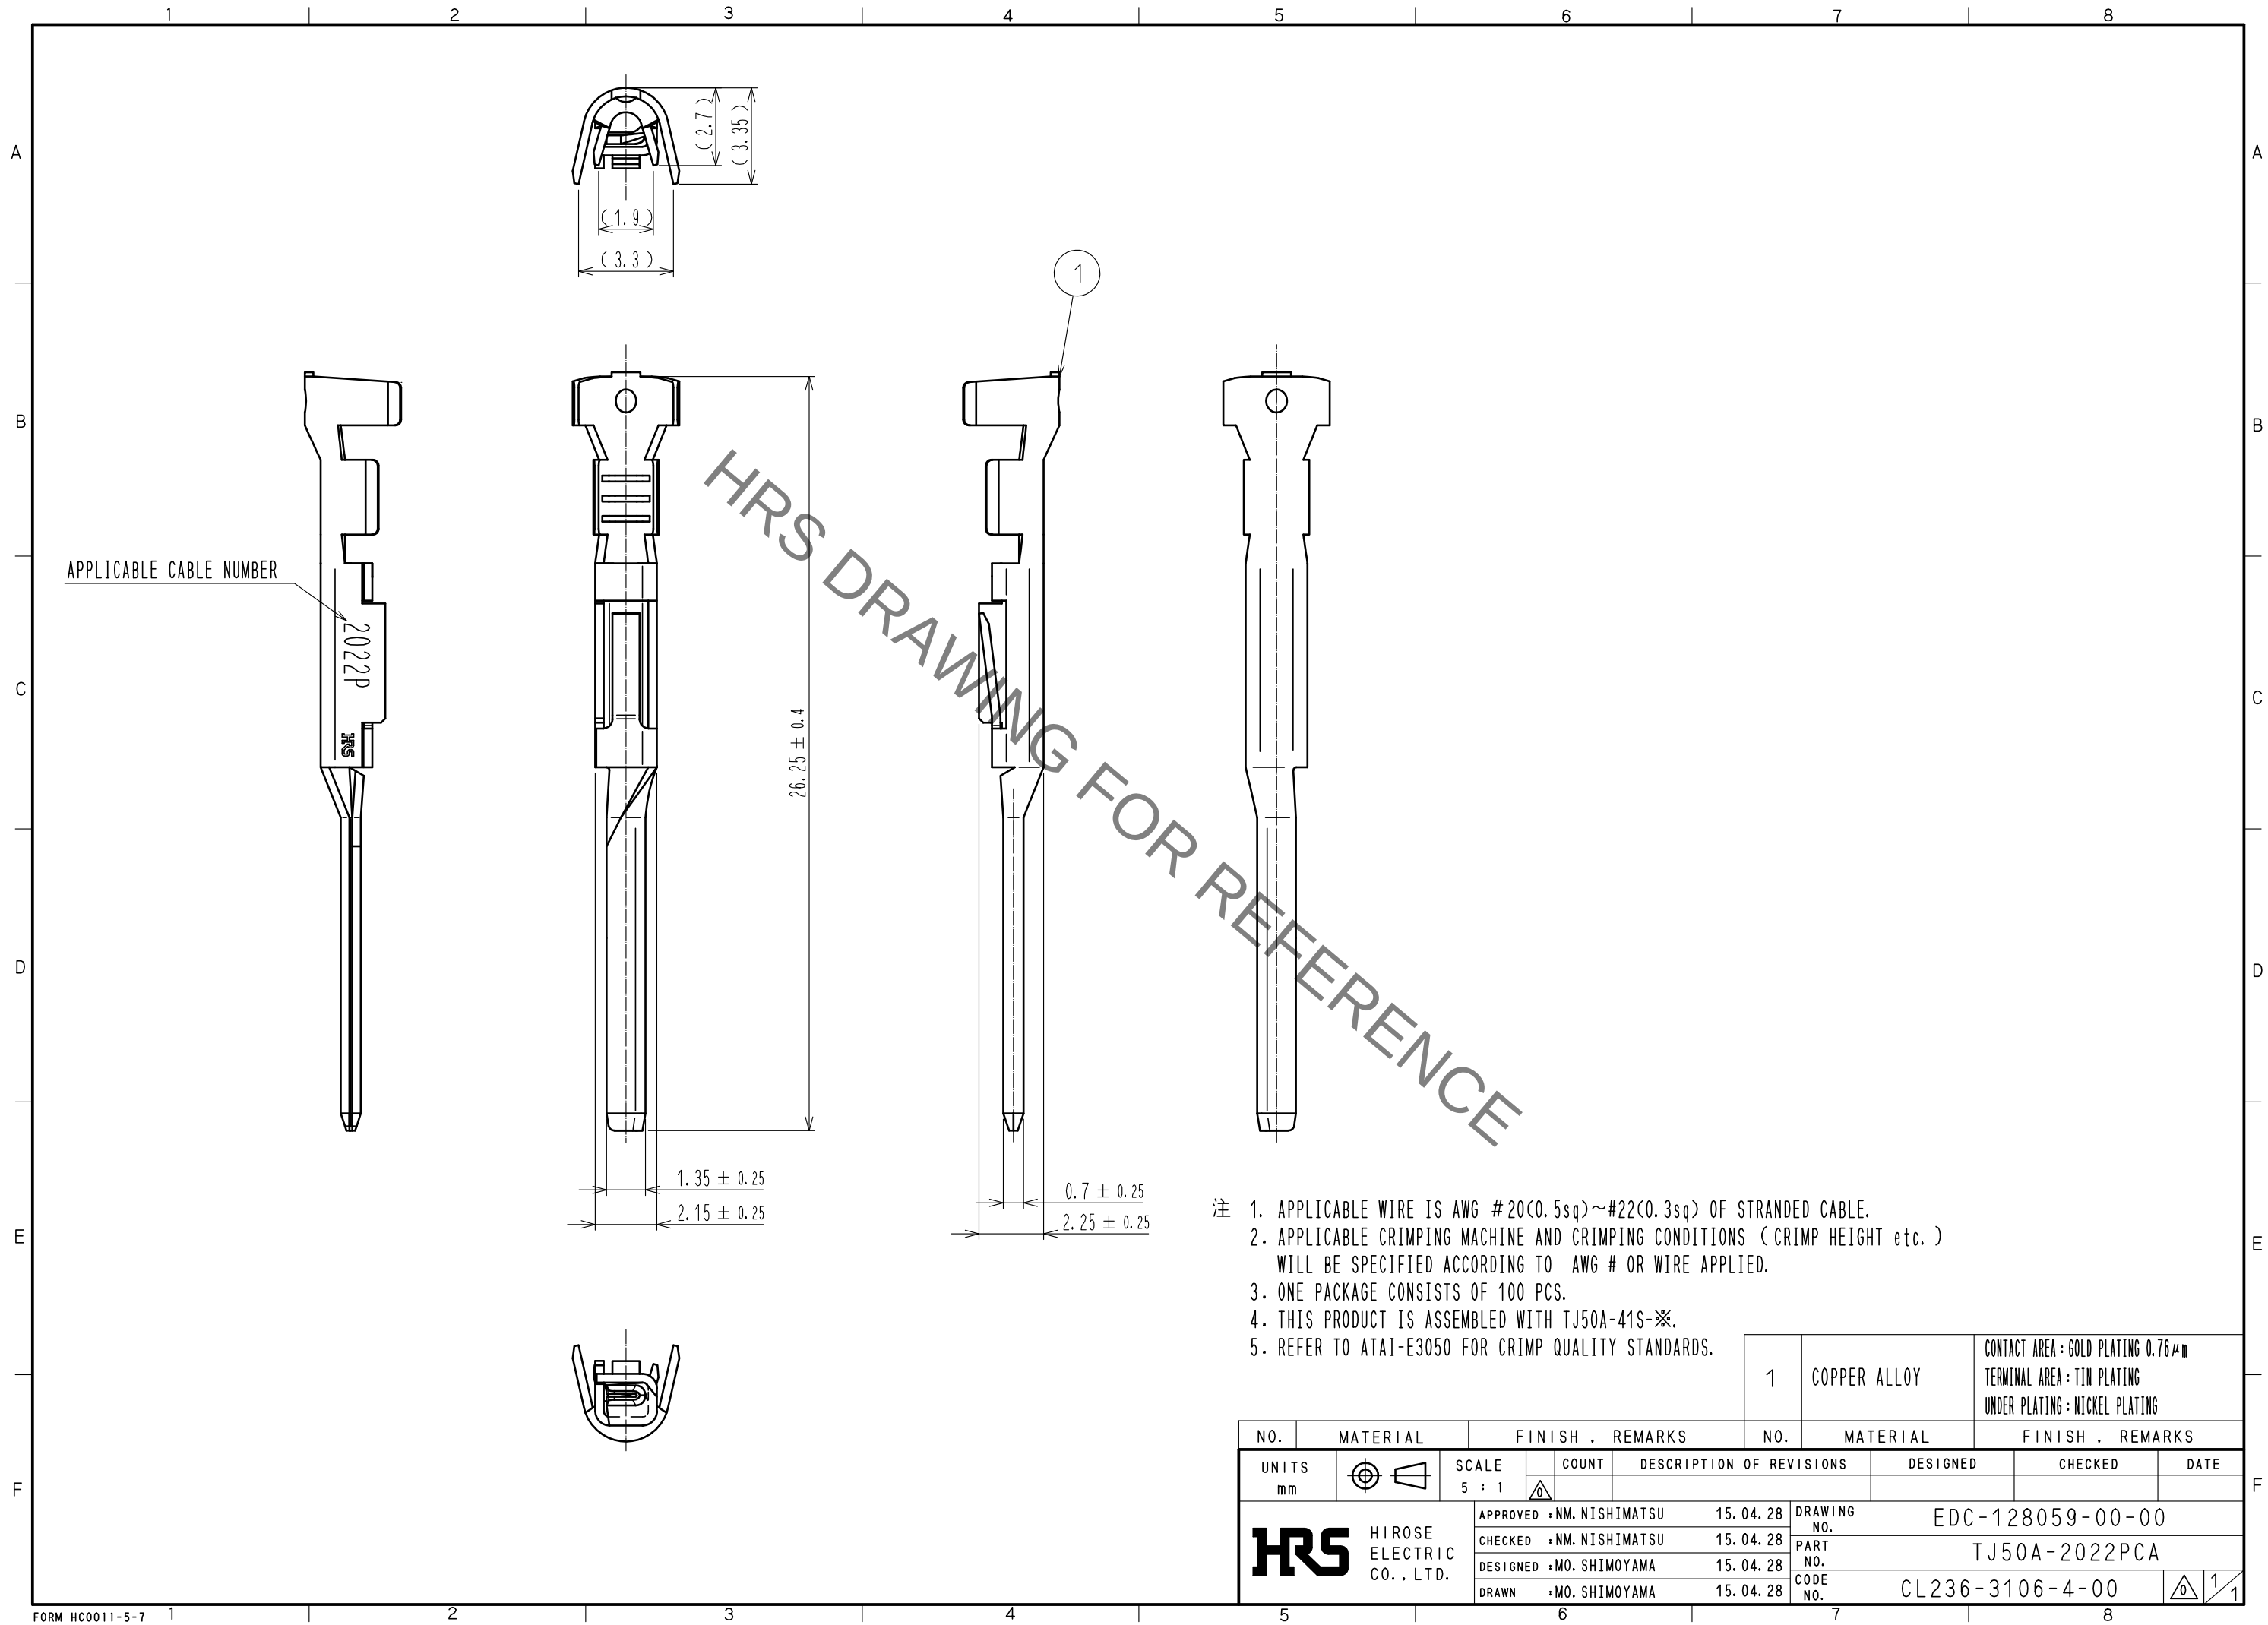

- 注 1. APPLICABLE WIRE IS AWG #20(0.5sq)~#22(0.3sq) OF STRANDED CABLE.
2. APPLICABLE CRIMPING MACHINE AND CRIMPING CONDITIONS (CRIMP HEIGHT etc.) WILL BE SPECIFIED ACCORDING TO AWG # OR WIRE APPLIED.
3. ONE PACKAGE CONSISTS OF 100 PCS.
4. THIS PRODUCT IS ASSEMBLED WITH TJ50A-41S-※.
5. REFER TO ATAI-E3050 FOR CRIMP QUALITY STANDARDS.

1		COPPER ALLOY	CONTACT AREA : GOLD PLATING 0.76μm TERMINAL AREA : TIN PLATING UNDER PLATING : NICKEL PLATING			
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 5 : 1	COUNT 	DESCRIPTION OF REVISIONS		DESIGNED
HIROSE ELECTRIC CO., LTD.		APPROVED : NM. NISHIMATSU	15. 04. 28	DRAWING NO. EDC-128059-00-00		
		CHECKED : NM. NISHIMATSU	15. 04. 28	PART NO. TJ50A-2022PCA		
		DESIGNED : MO. SHIMOYAMA	15. 04. 28	CODE NO. CL236-3106-4-00		
		DRAWN : MO. SHIMOYAMA	15. 04. 28	1/1		