
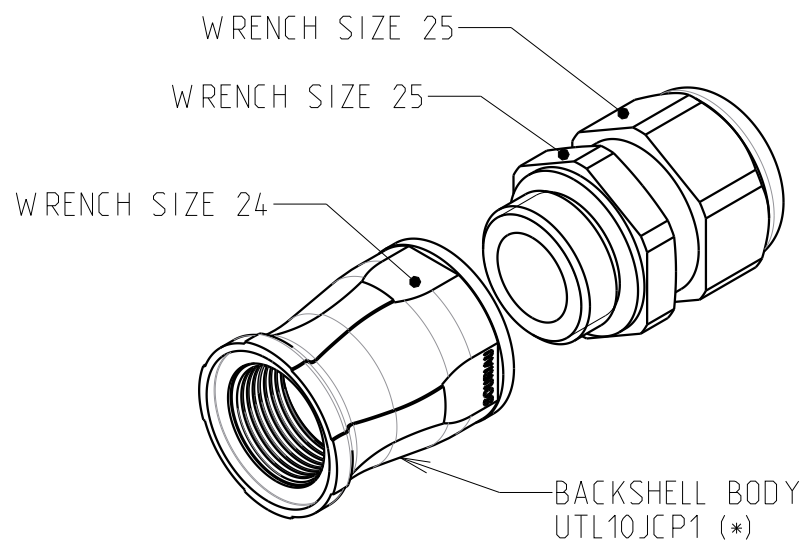


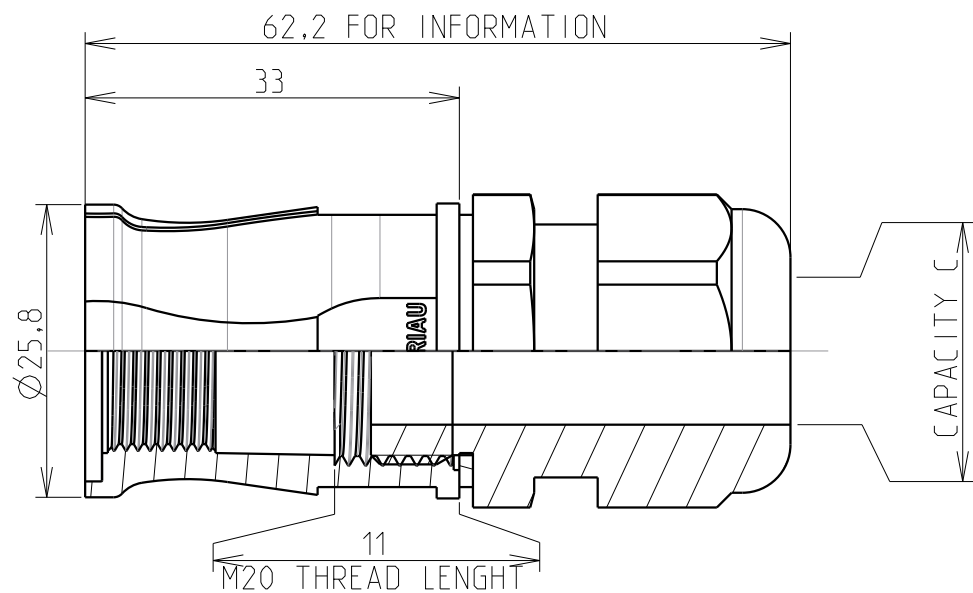

SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)

NOTES

MATERIALS

BACKSHELL BODY
CABLE GLAND

BLACK POLYAMID
BLACK POLYAMID + CR

PERFORMANCES CHARACTERISTICS

MECHANICAL

TEMPERATURE CLASS
SEALING IN ASSEMBLY CONDITIONS

IEC61984/UL1977
IEC60529
DIN40050
-40°C TO 105°C
IP68 1BAR DURING 1WEEK
IP69K
MIN 1000H

CORROSION SALT SPRAY

ROHS COMPLIANT

- 1. COUNTERPART REFERENCE UTL THREADED PLUG OR THREADED RECEPTACLE
- 2. CONNECTORS ARE DELIVERED AS PRE-ASSEMBLED KIT
- 3. CAPACITY C : Ø6.5 / Ø12
- 4. (*): OPTIONAL ORDERING PART NUMBERS TO BE ORDERED SEPARATELY
- 5. UNIT IN MM

MASS ± 5%
20.5 g

Country	Jurisdiction & Control List
FR	NOT LISTED

P/N : UTL10JC

A	13/2/18	Creation		
ISS	DATE	Latest modification - by: --		MOD N°
Designed by:		R.M.	Date: 13/2/18	CUSTOMER DRAWING
TITLE		THREADED BACKSHELL ASSEMBLY SIZE 10 UTL CONNECTOR		
Scale	1/1		General Linear Tolerances: ± 0.2	NPRDS / PROJECT BE170912A
SOURIAU		WWW.SOURIAU.COM		This document is the property of SOURIAU It must not be reproduced or communicated without permission
FORMAT	A3	SOURIAU DRG N° UTL1-0107A-C		
				SHEET 1 / 1