


VOLEX RESERVES THE RIGHT TO ALTER NON-CRITICAL DIMENSIONS WITHOUT NOTICE.

PACKAGING: FOLDED & TIED

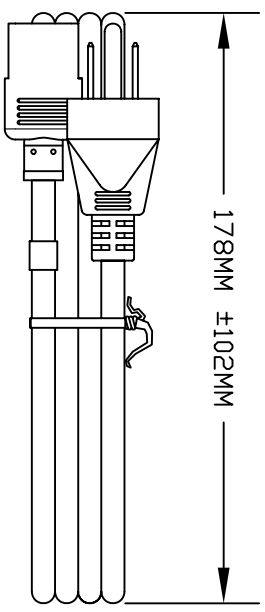

- NOTES:
- 1) CORDAGE: 18/3 SVT, 60°C, BLACK, BRAID SHIELDED
 - 2) APPROVALS: (UL) (CSA)
 - 3) RATING: 10 AMP/125 VOLTS
 - 4) FLAME RATING: FT2
 - 5) SHIELD WILL BE ATTACHED TO GROUND PIN ON PLUG END OF CORD. NO SHIELD CONNECTION WILL BE MADE ON CONNECTOR END.
 - 6) ALL DIMENSIONS IN MILLIMETERS.
 - 7) PACKAGING: 25 PIECES/CARTON.

REV	DESCRIPTION	DATE
1	C.U.D - NEW RELEASE	8/8/07
2		
3		

	<input checked="" type="checkbox"/> Indianapolis, IN <input type="checkbox"/> Conover, N.C. <input type="checkbox"/> Freemont, CA <input type="checkbox"/> Aguascalientes, MX <input type="checkbox"/> Tijuana, Mexico <input type="checkbox"/> Hermosillo, MX <input type="checkbox"/> Clinton, AR <input type="checkbox"/> Kanata, Canada	Proprietary Notice: This document is the property of Volex Incorporated. The information contained herein is not to be disclosed to anyone without the express written consent of Volex Inc.	MATERIAL: PLUG: PVC, BLACK JACKET: PVC, BLACK Rohs/Prop 65 Compliant+	FINISH: JACKET: SMOOTH
	FORM IN71-07 REV.A			

SCALE:	ECD:	ITEM DESCRIPTION
NDT TO SCALE	N/A	CORDSET-NORTH AMERICAN, BRAID SHIELDED, DETACHABLE POWER SUPPLY CORD (67")
TOLERANCE UNLESS OTHERWISE SPECIFIED: .XXX ± .005 .XX ± .02 .X ± .03 FRACT. ± 1/32 ANGULAR ± 1/2°		APPROVED: STC DRAWN BY: STC DATE: 8/8/07
		PART NO.: 17660 10 C3