

**CMLDM7585****SURFACE MOUNT SILICON  
N-CHANNEL AND P-CHANNEL  
ENHANCEMENT-MODE  
COMPLEMENTARY MOSFET****SOT-563 CASE**[www.centrasemi.com](http://www.centrasemi.com)**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CMLDM7585 consists of complementary N-Channel and P-Channel enhancement-mode silicon MOSFETs designed for high speed pulsed amplifier and driver applications. These MOSFETs offer very low  $r_{DS(ON)}$  and low threshold voltage.

**MARKING CODE: 87C****FEATURES:**

- ESD protection up to 1800V (Human Body Model)
- 350mW power dissipation
- Very low  $r_{DS(ON)}$
- Low threshold voltage
- Logic level compatible
- Small, SOT-563 surface mount package

**APPLICATIONS:**

- Load/Power switches
- Power supply converter circuits
- Battery powered portable devices

**MAXIMUM RATINGS:** ( $T_A=25^\circ\text{C}$ )

	SYMBOL	N-CH (Q1)	P-CH (Q2)	UNITS
Drain-Source Voltage	$V_{DS}$	20		V
Gate-Source Voltage	$V_{GS}$	8.0		V
Continuous Drain Current (Steady State)	$I_D$	650		mA
Maximum Pulsed Drain Current ( $t_p=10\mu\text{s}$ )	$I_{DM}$	1.3	1.0	A
Power Dissipation (Note 1)	$P_D$	350		mW
Power Dissipation (Note 2)	$P_D$	300		mW
Power Dissipation (Note 3)	$P_D$	150		mW
Operating and Storage Junction Temperature	$T_J, T_{stg}$	-65 to +150		$^\circ\text{C}$
Thermal Resistance (Note 1)	$\theta_{JA}$	357		$^\circ\text{C/W}$

**ELECTRICAL CHARACTERISTICS:** ( $T_A=25^\circ\text{C}$ )

SYMBOL	TEST CONDITIONS	N-CH (Q1)			P-CH (Q2)			UNITS
		MIN	TYP	MAX	MIN	TYP	MAX	
$I_{GSSF}, I_{GSSR}$	$V_{GS}=4.5\text{V}, V_{DS}=0$	-	-	1.0	-	-	10	$\mu\text{A}$
$I_{DSS}$	$V_{DS}=16\text{V}, V_{GS}=0$	-	-	100	-	-	100	nA
$BV_{DSS}$	$V_{GS}=0, I_D=250\mu\text{A}$	20	-	-	20	-	-	V
$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu\text{A}$	0.5	-	1.1	0.5	-	1.0	V
$V_{SD}$	$V_{GS}=0, I_S=200\text{mA}$	-	-	1.1	-	-	-	V
$V_{SD}$	$V_{GS}=0, I_S=250\text{mA}$	-	-	-	-	-	1.1	V
$r_{DS(ON)}$	$V_{GS}=4.5\text{V}, I_D=600\text{mA}$	-	0.14	0.23	-	-	-	$\Omega$
$r_{DS(ON)}$	$V_{GS}=4.5\text{V}, I_D=350\text{mA}$	-	-	-	-	0.25	0.36	$\Omega$
$r_{DS(ON)}$	$V_{GS}=2.5\text{V}, I_D=500\text{mA}$	-	0.2	0.275	-	-	-	$\Omega$
$r_{DS(ON)}$	$V_{GS}=2.5\text{V}, I_D=300\text{mA}$	-	-	-	-	0.37	0.5	$\Omega$
$r_{DS(ON)}$	$V_{GS}=1.8\text{V}, I_D=350\text{mA}$	-	-	0.7	-	-	-	$\Omega$
$r_{DS(ON)}$	$V_{GS}=1.8\text{V}, I_D=150\text{mA}$	-	-	-	-	-	0.8	$\Omega$

Notes: (1) Ceramic or aluminum core PC Board with copper mounting pad area of 4.0mm<sup>2</sup>  
 (2) FR-4 Epoxy PC Board with copper mounting pad area of 4.0mm<sup>2</sup>  
 (3) FR-4 Epoxy PC Board with copper mounting pad area of 1.4mm<sup>2</sup>

R6 (8-June 2015)

CMLDM7585


**SURFACE MOUNT SILICON  
N-CHANNEL AND P-CHANNEL  
ENHANCEMENT-MODE  
COMPLEMENTARY MOSFET**



**ELECTRICAL CHARACTERISTICS - Continued:** ( $T_A=25^\circ\text{C}$ )

SYMBOL	TEST CONDITIONS	N-CH (Q1)		P-CH (Q2)		UNITS
		MIN	TYP	MIN	TYP	
gFS	$V_{DS}=10\text{V}, I_D=400\text{mA}$	1.0	-	-	-	S
gFS	$V_{DS}=10\text{V}, I_D=200\text{mA}$	-	-	0.2	-	S
$C_{rss}$	$V_{DS}=16\text{V}, V_{GS}=0, f=1.0\text{MHz}$	-	18	-	25	pF
$C_{iss}$	$V_{DS}=16\text{V}, V_{GS}=0, f=1.0\text{MHz}$	-	100	-	100	pF
$C_{oss}$	$V_{DS}=16\text{V}, V_{GS}=0, f=1.0\text{MHz}$	-	16	-	21	pF
$Q_{g(\text{tot})}$	$V_{DS}=10\text{V}, V_{GS}=4.5\text{V}, I_D=500\text{mA}$	-	1.58	-	-	nC
$Q_{g(\text{tot})}$	$V_{DS}=10\text{V}, V_{GS}=4.5\text{V}, I_D=200\text{mA}$	-	-	-	1.2	nC
$Q_{gs}$	$V_{DS}=10\text{V}, V_{GS}=4.5\text{V}, I_D=500\text{mA}$	-	0.17	-	-	nC
$Q_{gs}$	$V_{DS}=10\text{V}, V_{GS}=4.5\text{V}, I_D=200\text{mA}$	-	-	-	0.24	nC
$Q_{gd}$	$V_{DS}=10\text{V}, V_{GS}=4.5\text{V}, I_D=500\text{mA}$	-	0.24	-	-	nC
$Q_{gd}$	$V_{DS}=10\text{V}, V_{GS}=4.5\text{V}, I_D=200\text{mA}$	-	-	-	0.36	nC
$t_{\text{on}}$	$V_{DD}=10\text{V}, V_{GS}=4.5\text{V}, I_D=200\text{mA}, R_G=10\Omega$	-	10	-	38	ns
$t_{\text{off}}$	$V_{DD}=10\text{V}, V_{GS}=4.5\text{V}, I_D=200\text{mA}, R_G=10\Omega$	-	25	-	48	ns


**SOT-563 CASE - MECHANICAL OUTLINE**

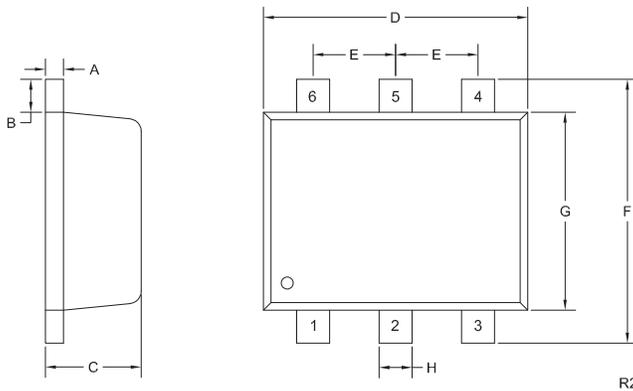

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.0027	0.007	0.07	0.18
B	0.008		0.20	
C	0.017	0.024	0.45	0.60
D	0.059	0.067	1.50	1.70
E	0.020		0.50	
F	0.059	0.067	1.50	1.70
G	0.043	0.051	1.10	1.30
H	0.006	0.012	0.15	0.30

SOT-563 (REV: R2)

**PIN CONFIGURATION**



**LEAD CODE:**

- 1) Source Q1
- 2) Gate Q1
- 3) Drain Q2
- 4) Source Q2
- 5) Gate Q2
- 6) Drain Q1

**MARKING CODE: 87C**





R6 (8-June 2015)

CMLDM7585

SURFACE MOUNT SILICON  
N-CHANNEL AND P-CHANNEL  
ENHANCEMENT-MODE  
COMPLEMENTARY MOSFET



### N-CHANNEL TYPICAL ELECTRICAL CHARACTERISTICS

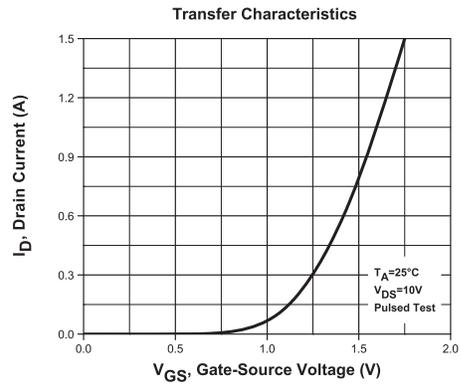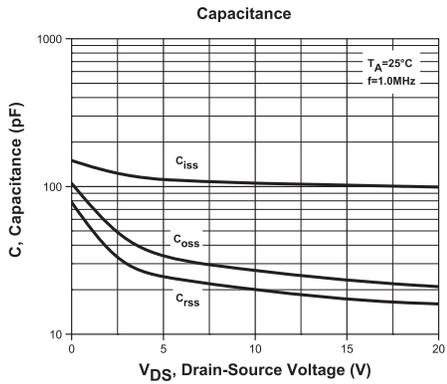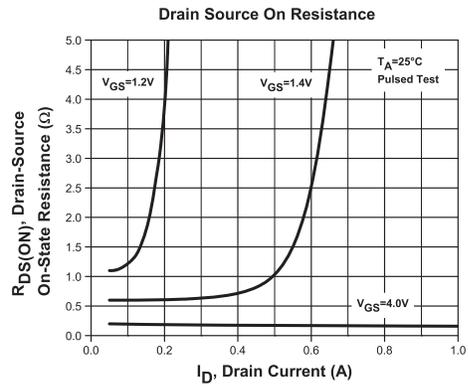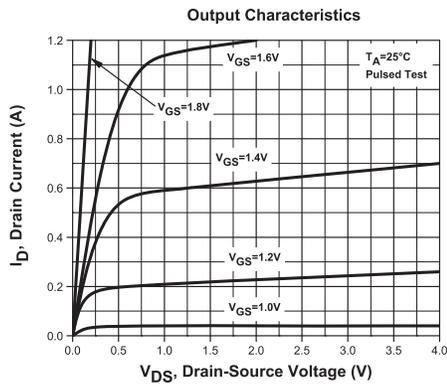






R6 (8-June 2015)

CMLDM7585

SURFACE MOUNT SILICON  
N-CHANNEL AND P-CHANNEL  
ENHANCEMENT-MODE  
COMPLEMENTARY MOSFET



P-CHANNEL TYPICAL ELECTRICAL CHARACTERISTICS

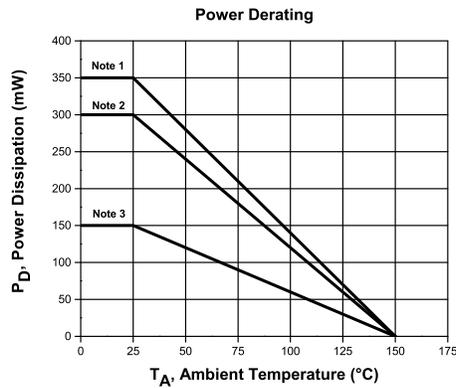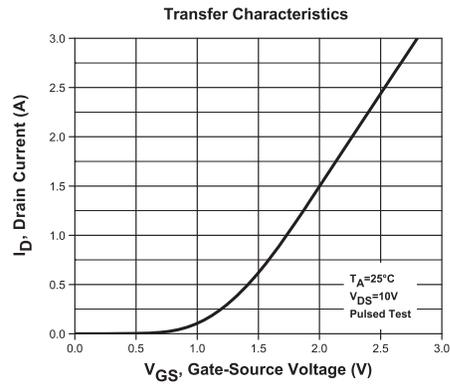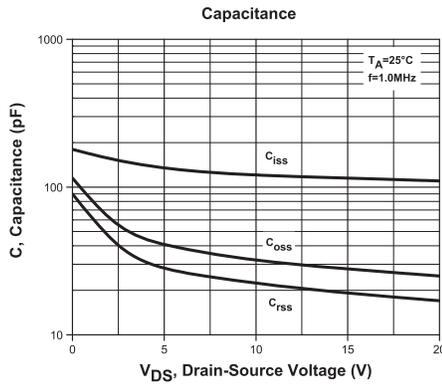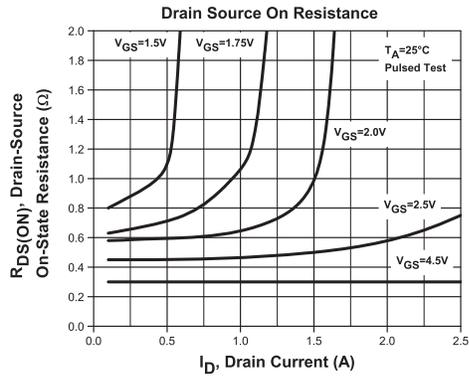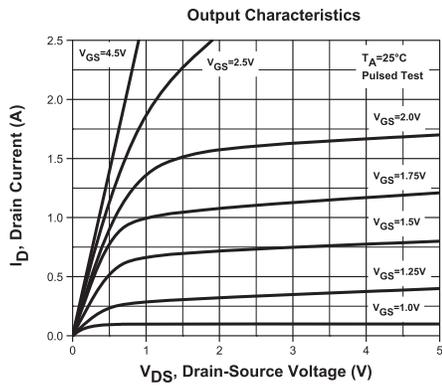

R6 (8-June 2015)

CMLDM7585

**SURFACE MOUNT SILICON  
N-CHANNEL AND P-CHANNEL  
ENHANCEMENT-MODE  
COMPLEMENTARY MOSFET**



**SERVICES**

- Bonded Inventory
- Custom Electrical Screening
- Custom Electrical Characteristic Curves
- SPICE Models
- Custom Packaging
- Package Base Options
- Custom Device Development/ Multi Discrete Modules (MDM™)
- Bare Die Available for Hybrid Applications

---

**LIMITATIONS AND DAMAGES DISCLAIMER:** In no event shall Central be liable for any collateral, indirect, punitive, incidental, consequential, or exemplary damages in connection with or arising out of a purchase order or contract or the use of products provided hereunder, regardless of whether Central has been advised of the possibility of such damages. Excluded damages shall include, but not be restricted to: cost of removal or reinstallation, rework, ancillary costs to the procurement of substitute products, loss of profits, loss of savings, loss of use, loss of data, or business interruption. No claim, suit, or action shall be brought against Central more than two (2) years after the related cause of action has occurred.

In no event shall Central's aggregate liability from any warranty, indemnity, or other obligation arising out of or in connection with a purchase order or contract, or any use of any Central product provided hereunder, exceed the total amount paid to Central for the specific products sold under a purchase order or contract with respect to which losses or damages are claimed. The existence of more than one (1) claim against the specific products sold to Buyer under a purchase order or contract shall not enlarge or extend this limit.

Buyer understands and agrees that the foregoing liability limitations are essential elements of a purchase order or contract and that in the absence of such limitations, the material and economic terms of the purchase order or contract would be substantially different.

R6 (8-June 2015)