



| | | |
|-----|----------|------|
| REV | DATE | ECO# |
| A | 03/31/95 | 1342 |
| | | |

DRAWING NOT TO SCALE
ALL DIMENSIONS IN INCHES

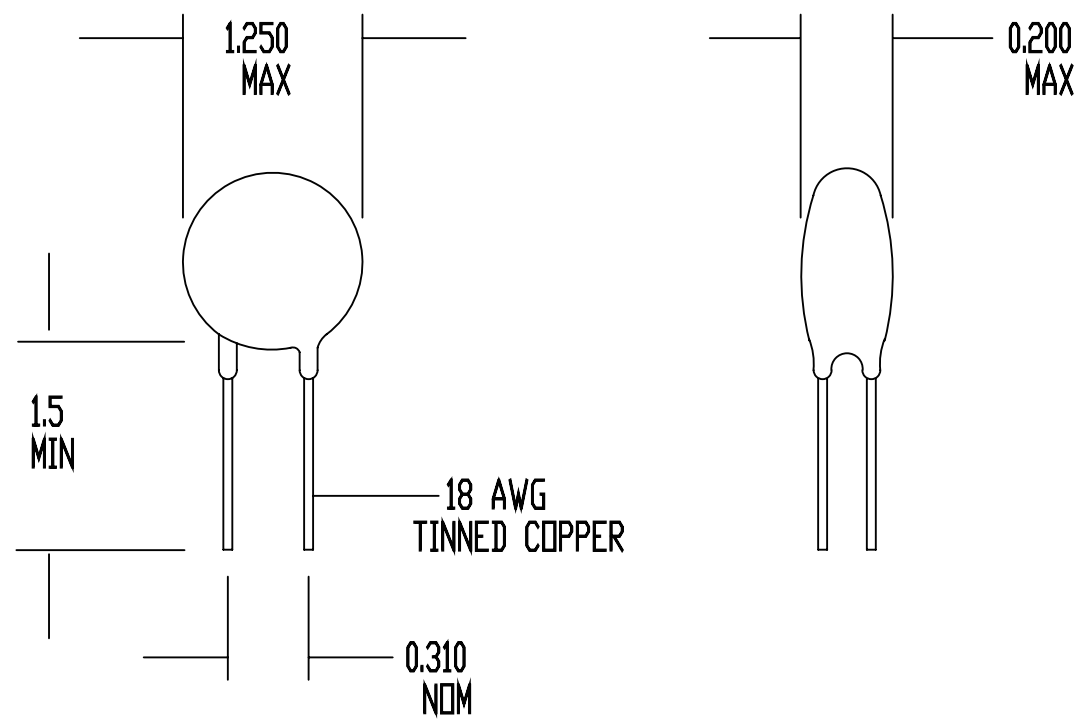

SPECIFICATIONS:

RESISTANCE AT 25 DEG C = 0.5 OHMS +/- 20%
 MAX CONTINUOUS CURRENT (I_{max}) = 30 AMPS
 RESISTANCE AT I_{max} = 0.010 OHMS NOMINAL
 MAX VOLTAGE RATING = 120 VAC (RMS)
 MAX SURGE RATING = 31 JOULES
 ENCAPSULATION = SILICONE RESIN
 MARKING = OPTIONAL
 LEADS = RODAN P/N STL-209-50

| | | |
|--------------------|----------------|--|
| DRAWN BY D. NGUYEN | |  Circuit Protection Thermistors |
| DATE 12/06/88 | ORIG. F. TISEO | |
| REV A | APP | SURGE-GARD INRUSH CURRENT LIMITER |
| SHEET 1 OF 1 | | SG260 |