

# Q1 Standard MP-A6 Triple Transmit Wireless Charge Coil

Pulse Part Number SWW174N



## Features

- Magnetic Coil: antifreeze plate + coil
- Meet the Qi international standard
- Antifreeze film of transmitter is injection molding ,make use of V-ON material, unzerbrechlich, breakage proof, every shape suitable
- Length and gap of the outgoing line is customizability

## Application

-Wireless charge Tx

## Q1 Standard MP-A6 Triple Transmit Wireless Charge Coil

Pulse Part Number SWW174N


### Electrical specifications

Standard Voltage(V)	5/12V
Max Current (A)	1~2A
DC Resistance (mΩ)	80±10%
Inductance(uH)	$11.3 \pm 10\%$ / $13.9 \pm 10\%$
Q	>70
Wire Diameter (mm)	0.07*105 strands cotton-insulated wire
Testing Environment	100KHZ/1V


## Q1 Standard MP-A6 Triple Transmit Wireless Charge Coil

Pulse Part Number SWW174N

## Mechanical dimensions

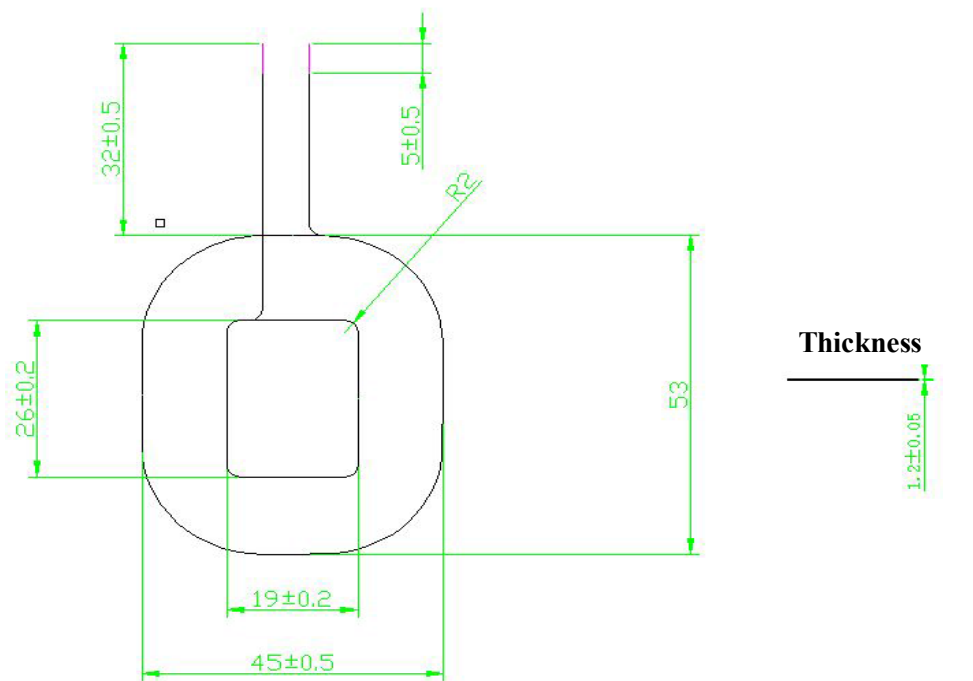

## Coil

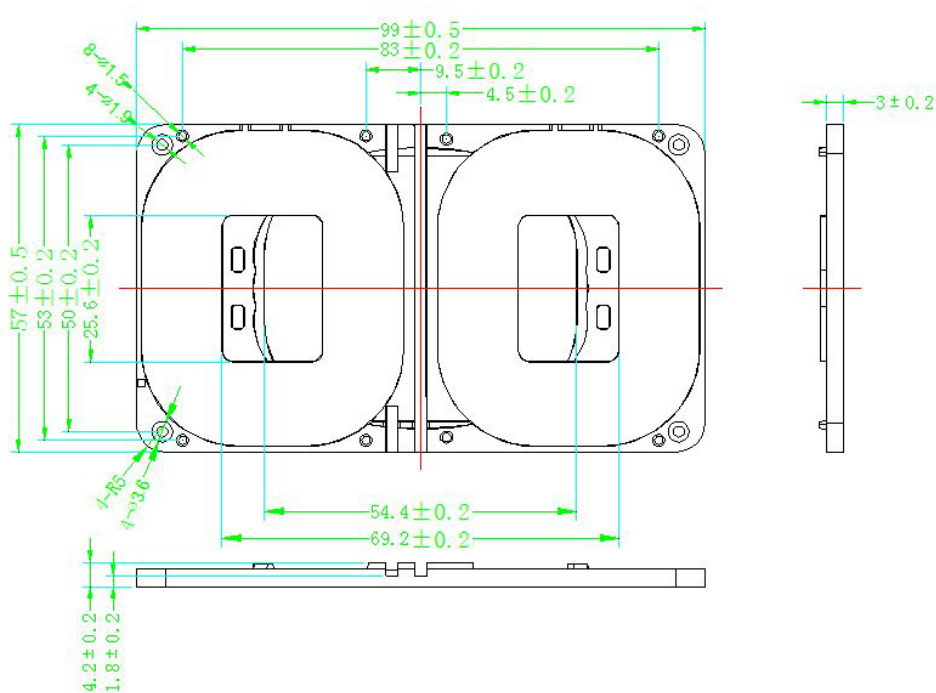

### Antifreeze plate

# QI Standard MP-A6 Triple Transmit Wireless Charge Coil

Pulse Part Number: SWW174N

## Packing


- Put 1pc product in the poly bag, then add the info label.
- Align the finished goods into the tray.
- Cardboard sheet under and on the top of the tray stack in the tray stack. Every second tray must be rotated 180 degrees, binding of the stack-1 strap lengthwise and 2 strap crosswise.
- Add foam paper between two trays.
- First put down 1pc sheet board in box, then put binding tray in box, empty 1 pc on the top of the box.
- Binding of the carton: scaled with tape, 1 strap length wise and 2 strap crosswise.



Label content:

P/N:  
Project Name:  
Inductance:

- P/N, e.g. SWA1380
- Project Name, e.g. A6
- Wireless Charge Coil
- Inductance, e.g. 12.5uH

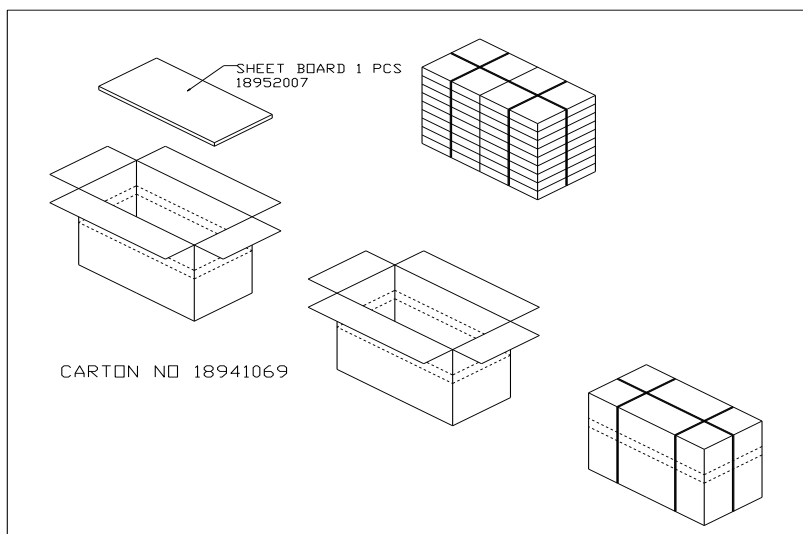

Contact: [mobiledeviceantenna.sales@pulseelectronics.com](mailto:mobiledeviceantenna.sales@pulseelectronics.com)