
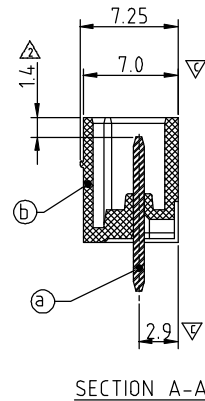
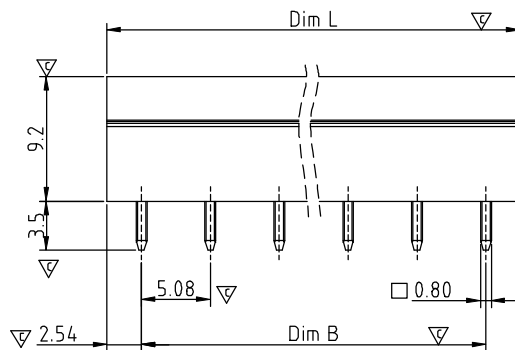
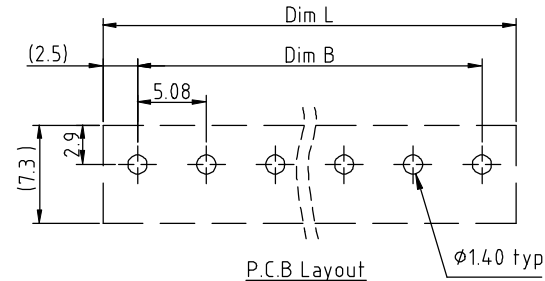


SIGN	DATE	DESCRIPTION	APPROVER
△	12/22/09	Add UL standard	Jacke
△	10/20/11	The dimensions are added	Aaron
△	11/18'13	Update the drawing	Chen Bo
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

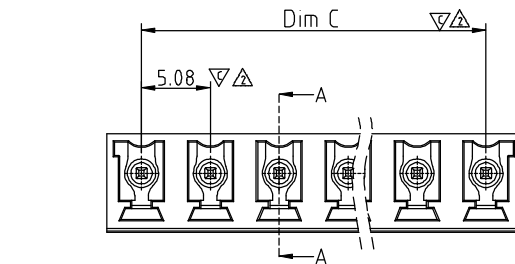

Material:

- Item ㉔ Male contact pin: Copper, Tin plated
- Item ㉕ Terminal(housing): Thermoplastic (UL94 V-0)

Electrical:

- Voltage rating: 300V
- Current rating: 10A
- Withstanding Voltage: 1.6 KV
- Operating temperature: -40°C to $+115^{\circ}\text{C}$
- Soldering temperature: $260^{\circ}\text{C} \pm 5^{\circ}\text{C}/5 \text{ Sec}$
- △ ● Safety Approval: 
- Critical dimension: ▽

PART NO. **VS xx 51 x 0 xxxx G**

No. OF POLES ————
02 2 CONTACTS
03 3 CONTACTS
... ..
24 24 CONTACTS

Color ————
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7035/D)
9 White(RAL1102)
C Green(RAL6018/U)

————— G RoHS compliant (lead<4%)
In copper Alloy
0000: "@" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by customer request.
please contact sales department.

Dimension

N= Number of poles

Dim L	$N \times 5.08$
Dim B	$(N-1) \times 5.08$
Dim C	$(N-1) \times 5.08$

Poles	Tolerance
2p-5p	± 0.15
6p-10p	± 0.25
11p-15p	± 0.30
16p-24p	± 0.40

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	VS 5.08 Series Close Vertical				
PART NO.	VSxx51x0xxxxG			DWG NO.	8VS0001
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Chen Bo 11/18`13	Chen Bo 11/18`13		
				UNIT: mm	X. ±0.50
				SCALE: NONE	X.X ±0.30
				SHEET: 01/01	X.XX ±0.10
				REV.: D	X° ±1°