
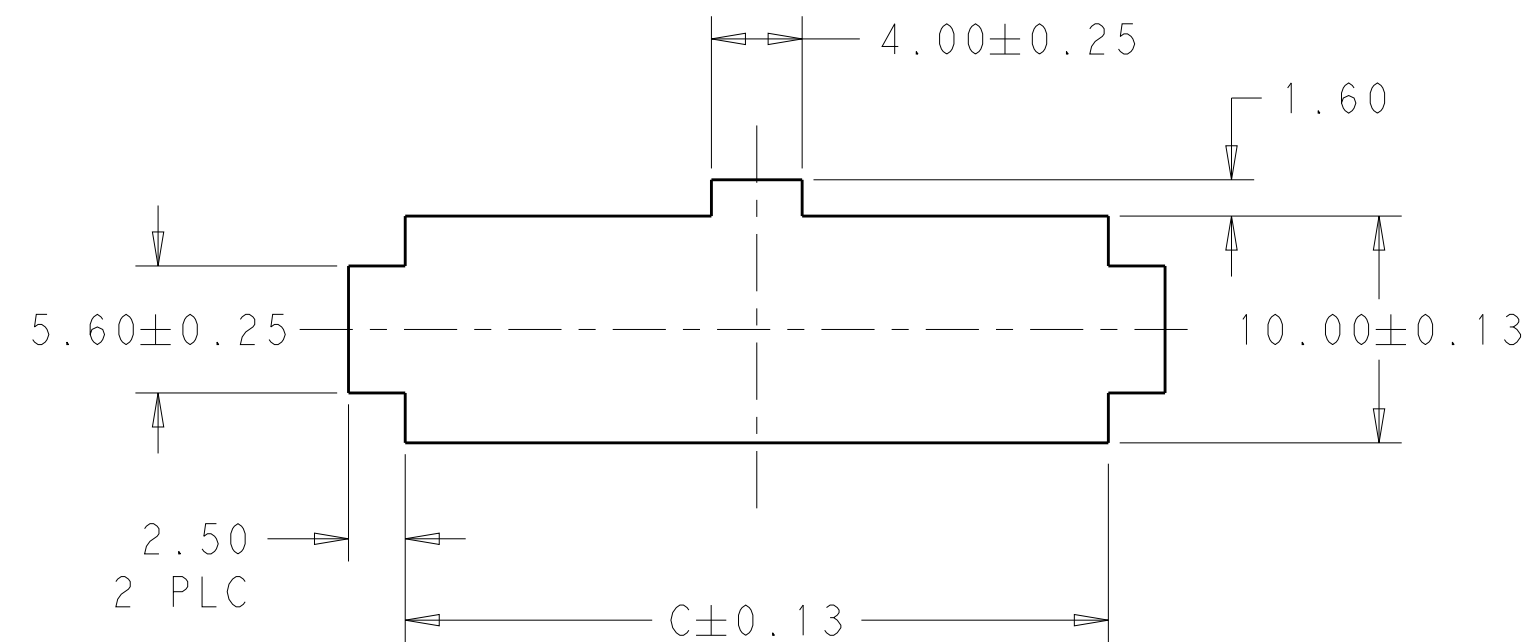
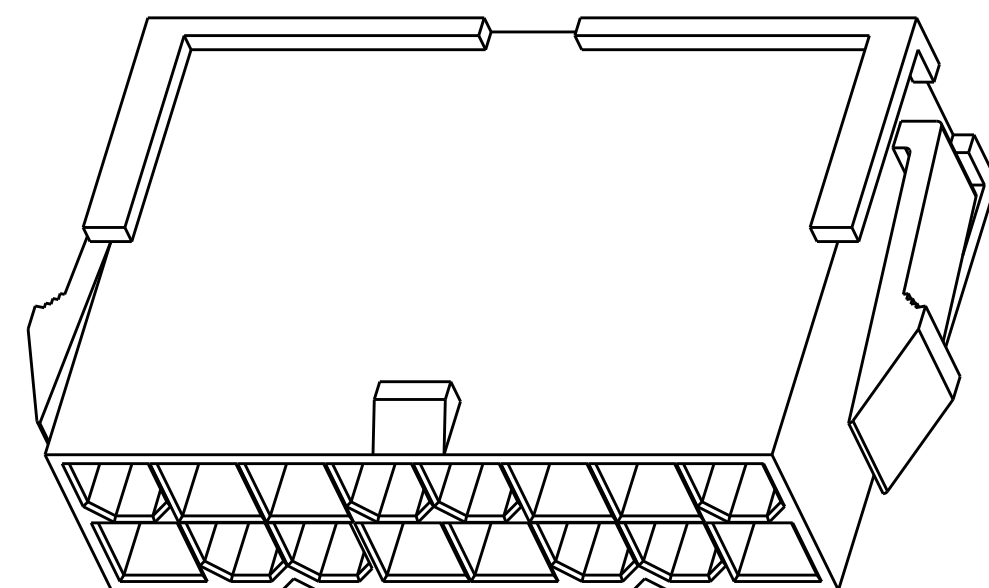
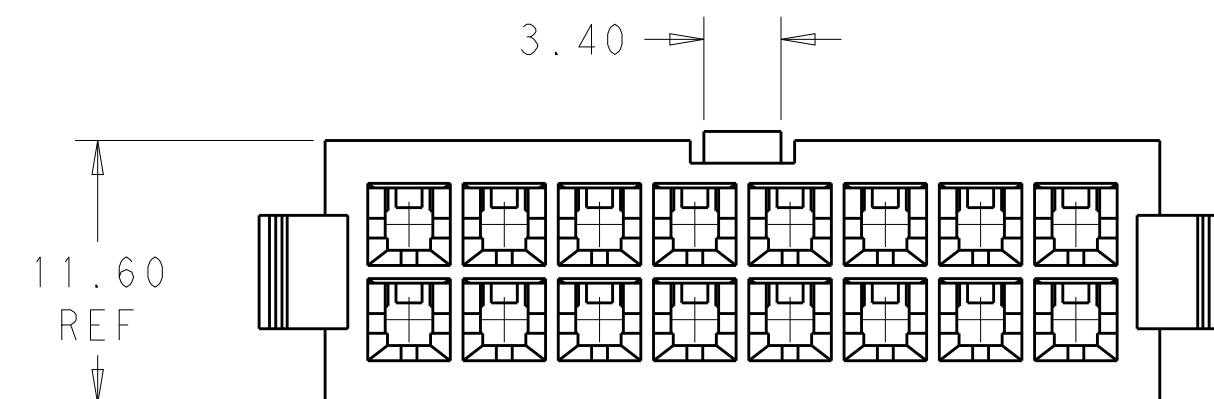
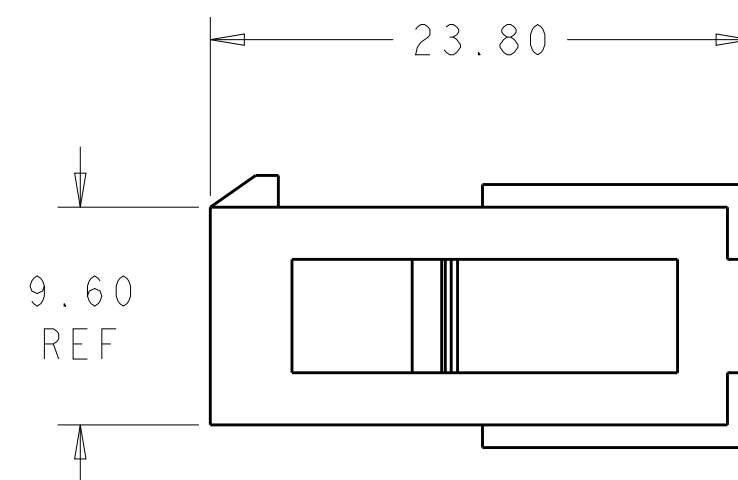


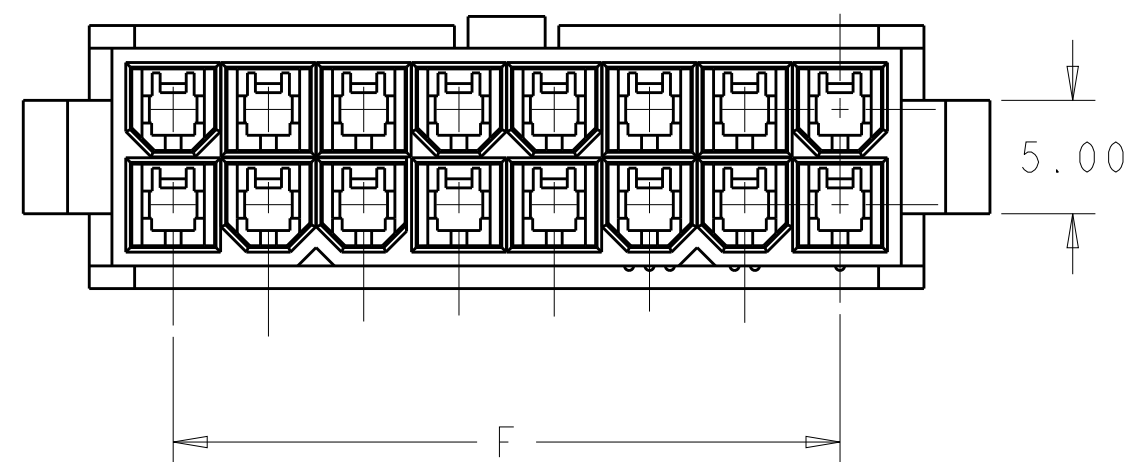

PANEL MUST BE PUNCHED OUT SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.

52.00	46.2	51.60	24	2-1969613-4
47.80	42.0	47.40	22	2-1969613-2
43.60	37.8	43.20	20	2-1969613-0
39.40	33.6	39.00	18	1-1969613-8
35.20	29.4	34.80	16	1-1969613-6
31.00	25.2	30.60	14	1-1969613-4
26.80	21.0	26.40	12	1-1969613-2
22.60	16.8	22.20	10	1-1969613-0
18.40	12.6	18.00	8	1969613-8
14.20	8.4	13.80	6	1969613-6
10.00	4.2	9.60	4	1969613-4
5.80	--	5.40	2	1969613-2
DIM C	DIM F	DIM L	NO. OF POS.	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 18 JAN 13	 TE Connectivity	
		CHN KURT RANDOLPH 18 JAN 13		
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD KURT RANDOLPH 18 JAN 13	NAME	
mm		PRODUCT SPEC	PANEL MOUNT PLUG HOUSING	
	0 PLC ±.	-	VAL-U-LOK	
	1 PLC ±.	-	-	
	2 PLC ±0.25	APPLICATION SPEC		
	3 PLC ±.	-		
	4 PLC ±.		SIZE	CAGE CODE
	ANGLES ±.		DRAWING NO	RESTRICTED TO
MATERIAL	FINISH	WEIGHT	A200779C-1969613	
NYLON 6/6, V0	COLOR-NATURAL	Customer Drawing	SCALE 3.1	SHEET 1 of 1
			REV	A