

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

(C) COPYRIGHT

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD




E3

REVISED PER ECR-16-010553

05AUG2017

BW

SG

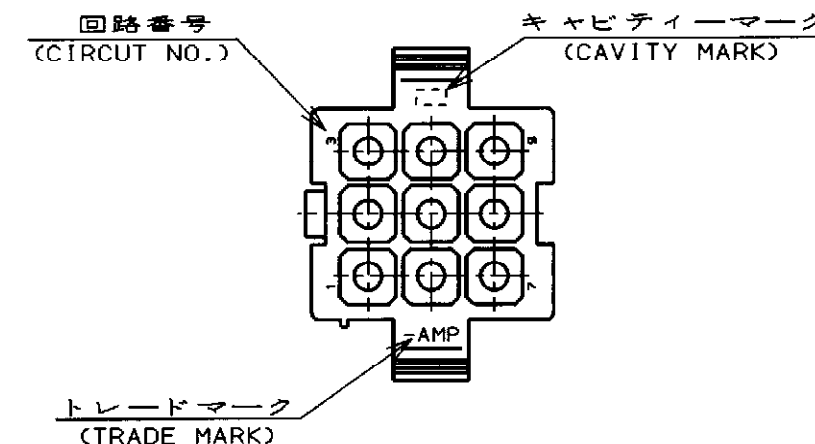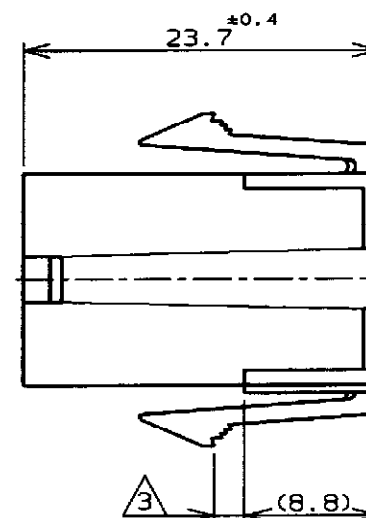
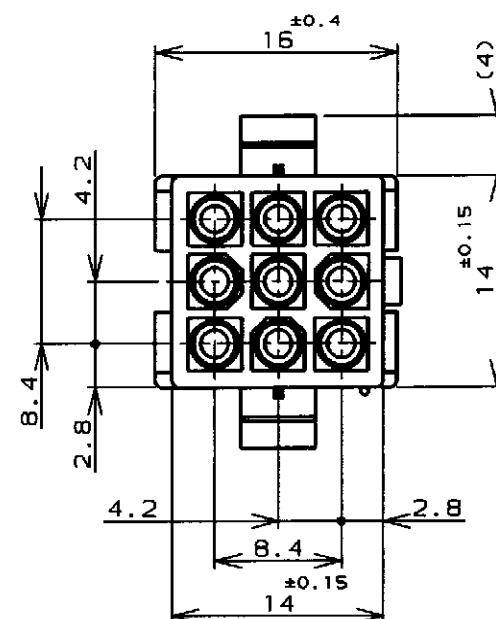


注記:

1. 使用端子型番は170359,170360,170361,170362
2. 嵌合相手ハウジング型番は172169
3. 通用パネル厚 0.8-2.0mm
4. 取付穴打抜方向とハウジングの挿入方向は同じとする。

NOTE:

1. APPLICABLE CONT P/N:170359,170360,170361,170362
2. MATING HSG P/N:172169
3. APPLICABLE PANEL THICKNESS:0.8-2.0mm
4. HOUSING INSERTION INTO THE PANEL CUT-OUT MUST BE DONE IN THE SAME DIRECTION WITH PUNCH KNOCKING.
5. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

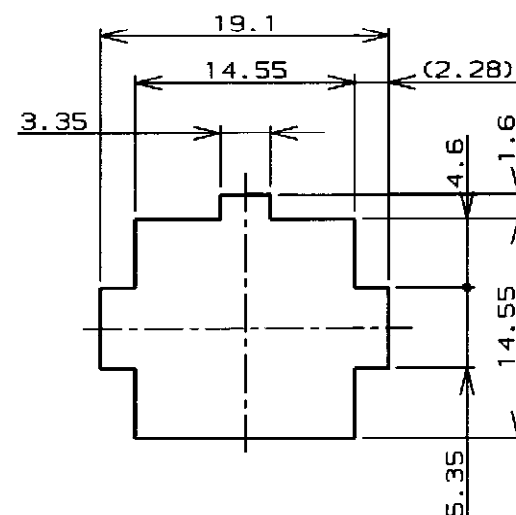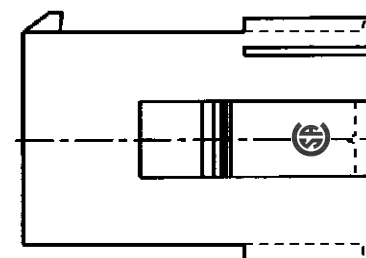寸法公差は±0.20
(TOLERANCE: ±0.20)パネル取付穴
(RECOMENDED PANEL OPENING DIMENSION)5
OBSOLETE

黒 (BLACK)

1-172161-9

青 (BLUE)

1-172161-6

緑 (GREEN)

1-172161-5

赤 (RED)

1-172161-2

自然色 (NATURAL)

172161-1

色 (COLOR)

型番 (P/N)

WIRE RANGE

適合電線断面積

INSULATION DIA

被覆外径

TE

TE Connectivity

9極ミニユニバーサルメイトンロックキャップハウジング (UL94V-0)

9Pos MINI UNIVERSAL MATE-N-LOCK CONN.CAP HOUSING (UL94V-0)

SIZE CAGE CODE DRAWING NO

A3 00779 C=172161

RESTRICTED TO

SCALE 2-1 SHEET 1 OF 1 REV E3

DIMENSIONS: 単位・精 mm	TOLERANCES UNLESS OTHERWISE SPECIFIED 一般公差 (GENERAL TOLERANCE) ±0.3
MATERIAL 材料 66ナイロン UL94V-0 (66NYLON UL94V-0)	FINISH 仕上

DWN 8 JUN '98 N. YAMASAKI	CHK 15 JUN '98 M. SHINDO	APVD 15 JUN '98 M. SHINDO
PRODUCT SPEC 製品規格 108-5138	INSTRUCTION SHEET 取扱い説明書 IS-105J	WEIGHT —
CUSTOMER DRAWING		

参考図面