

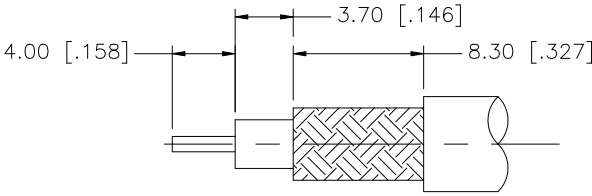



REV.	DATE	ECR NO.	DESCRIPTION
A	04/20/08	100005	UPDATE DRAWING FORMAT

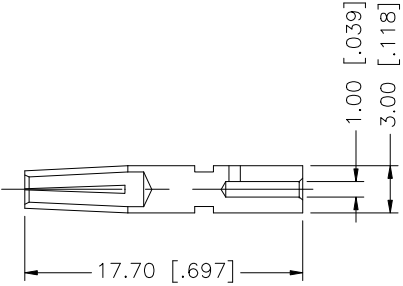

RECOMMENDED
CABLE STRIPPING DIM'S

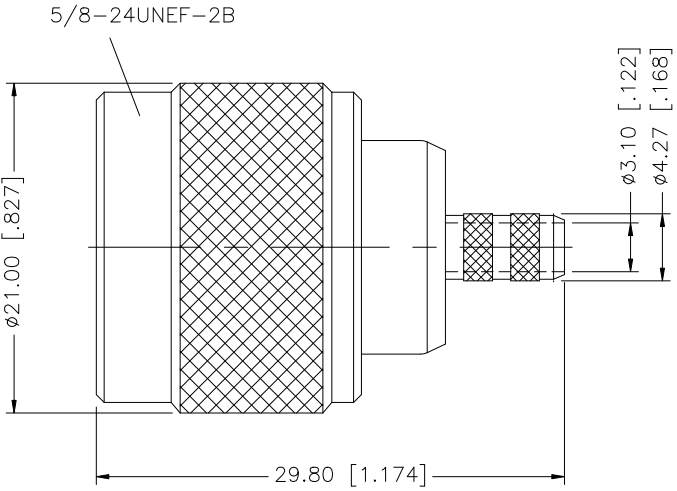

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex						
7						DRAWN	GRS	04/20/08								
6						CHECKED				PART DESCRIPTION N CRIMP REVERSE POLARIZED PLUG (FOR RG-223/U, 400/U)						
5						ISSUED										
4	FERRULE	COPPER	NEXCOTE	1		SHEET	1 OF 1			PART NO. 172142RP						
3	CONTACT PIN	PHOS. BRONZE	GOLD	1	CAD FILE C:/172/172142RP.DWG											
2	INSULATOR	PTFE	NATURAL	1	DWG. NO.				172142RP.DWG		REV.	A	SIZE	A	SCALE	NA
1	BODY	BRASS	NEXCOTE	1												
	DESCRIPTION	MATERIAL	FINISH	QTY												