


Jul.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

ELV. RoHS COMPLIANT

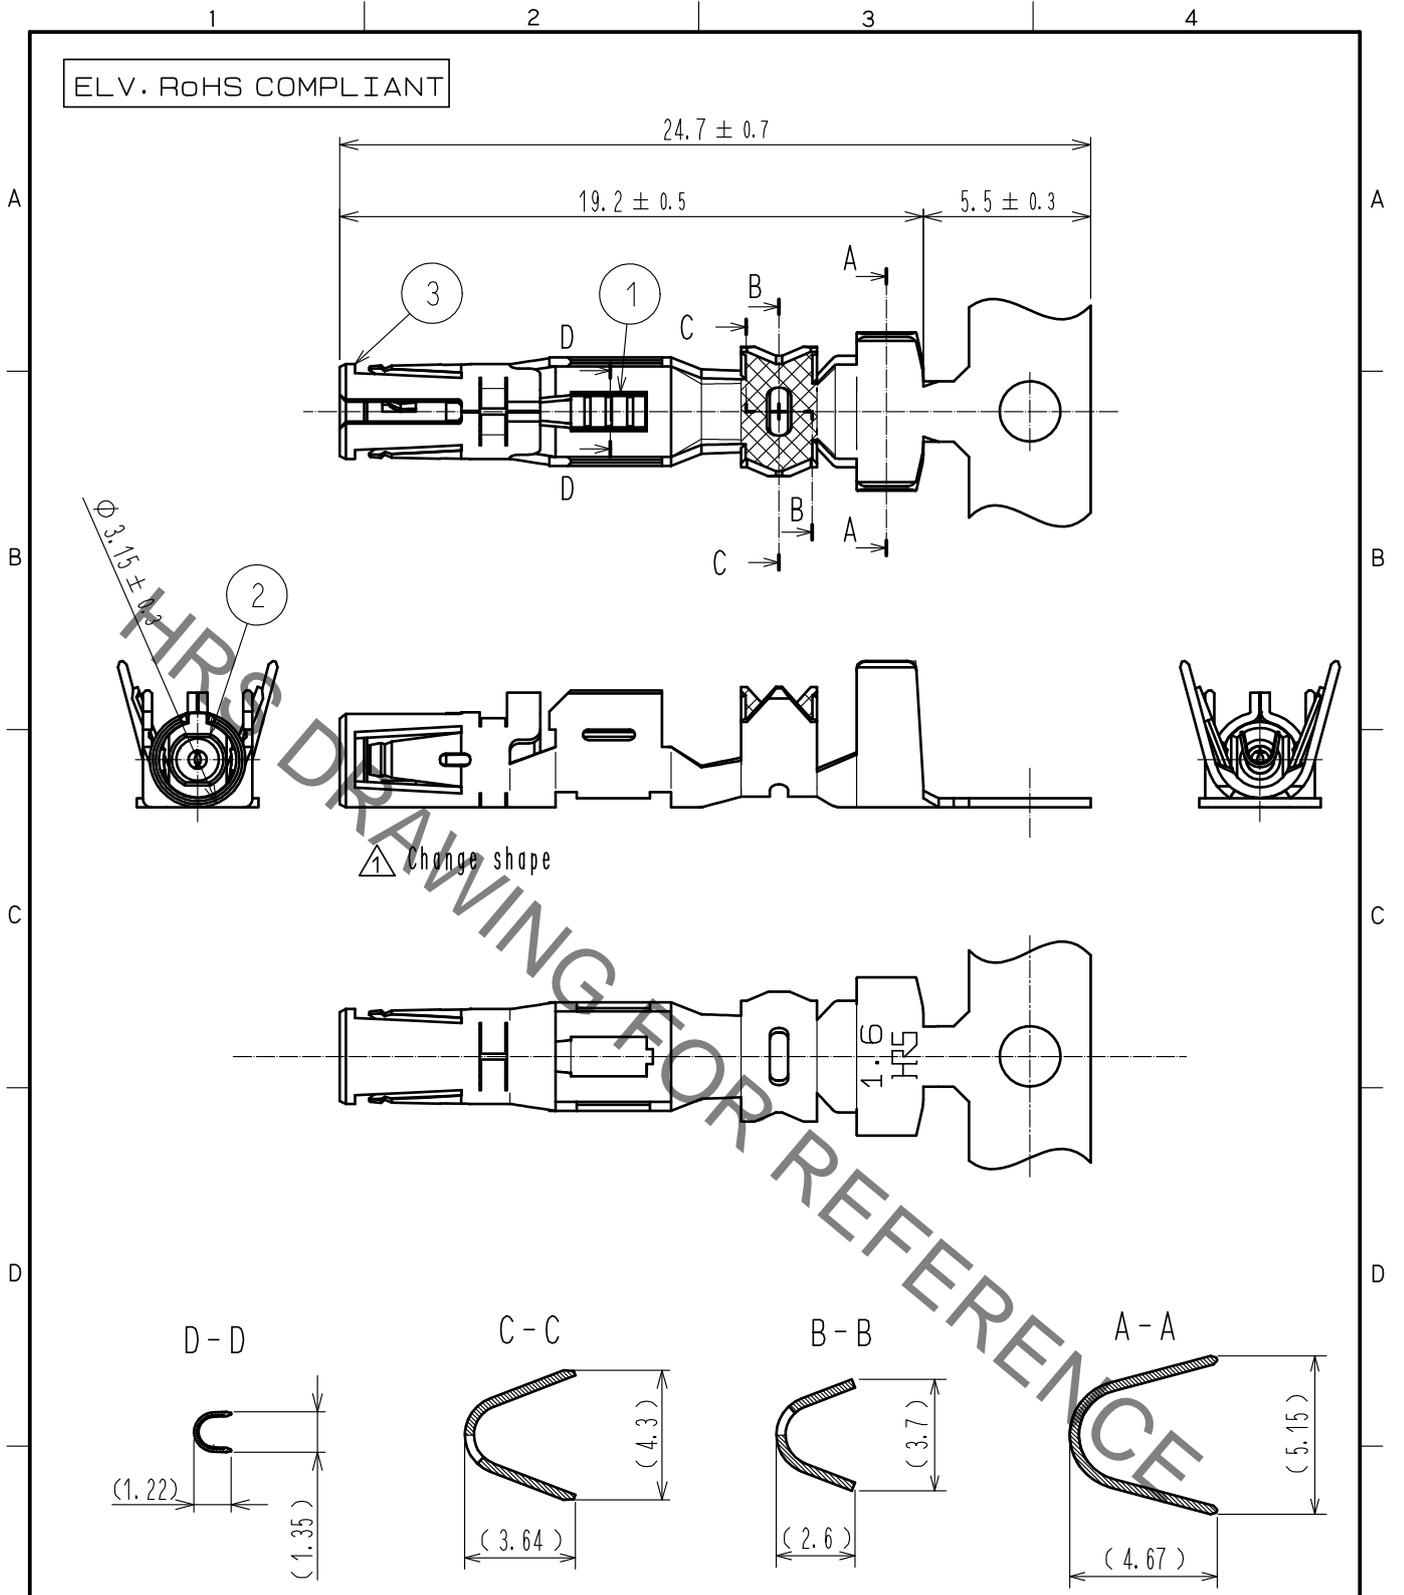

△ Change shape

NOTES
 1. PER REEL : 2500 CONTACTS.

| 2 | PA | BLACK | | | | | | | |
|---------------------------|-----------------|------------|----------------|------------|--|-----------------------|-------------------------|------------------|--|
| 1 | PHOSPHOR BRONZE | TIN PLATED | 3 | BRASS | TIN PLATED | | | | |
| NO. | MATERIAL | FINISH . | REMARKS | NO. | MATERIAL | FINISH . | REMARKS | | |
| | UNITS mm | | SCALE 4 : 1 | COUNT 1 | DESCRIPTION OF REVISIONS DIS-T-00001179 | DESIGNED NK. IKUTA | CHECKED KI. HIROKAWA | DATE 16.06.13 | |
| HIROSE ELECTRIC CO., LTD. | | APPROVED | ·NH. NAKATA | 16.03.29 | DRAWING NO. | EDC-360008-00-00 | | | |
| | | CHECKED | ·KI. HIROKAWA | 16.03.29 | PART NO. | GT36S-2426/1.6-2.9SCF | | | |
| | | DESIGNED | ·NK. IKUTA | 16.03.29 | CODE NO. | CL786-0081-6-00 | 1/1 | | |
| | | DRAWN | ·NK. IKUTA | 16.03.29 | | | | | |