
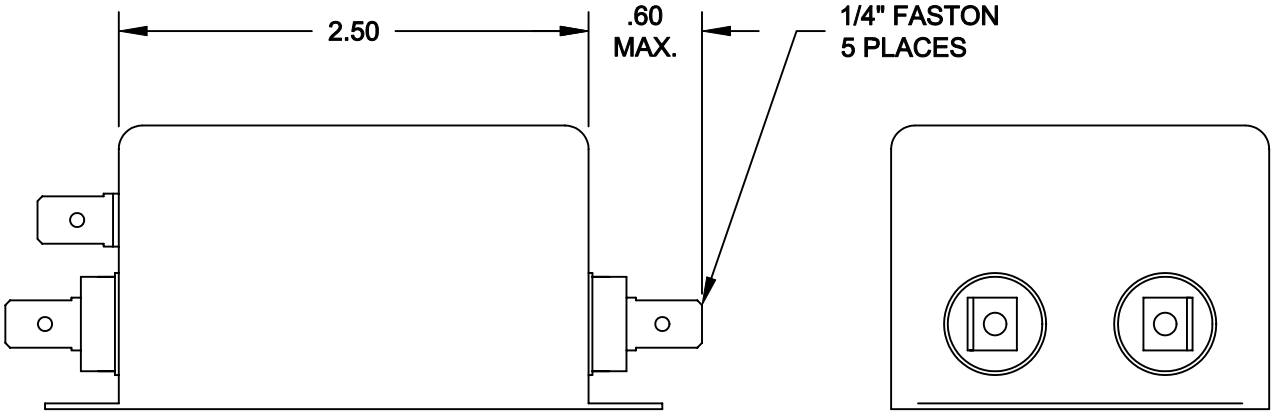
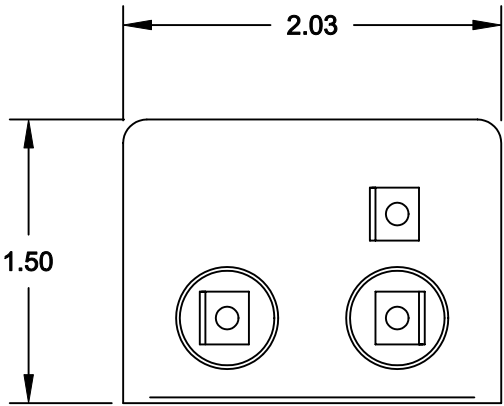


SPECIFICATIONS


1. CASE:
24 GA. (.024) CRS, TIN PLATED
2. RATED CURRENT:
15A
3. RATED VOLTAGE:
60VDC
4. TEST VOLTAGE:
LINE TO GROUND: 150VDC

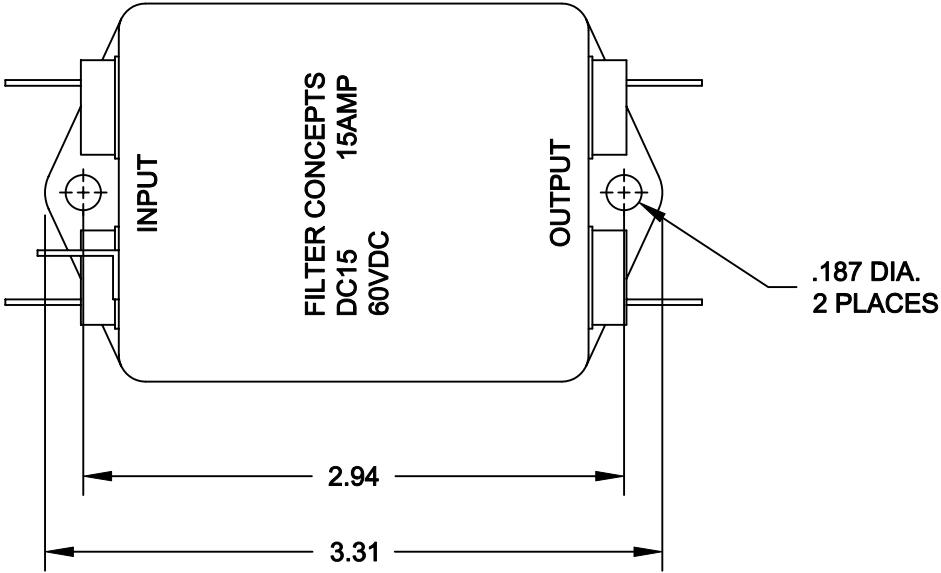

INSERTION LOSS (50Ω TYPICAL)

	.05 MHz	.15 MHz	.50 MHz	1.5 MHz	5.0 MHz	20 MHz
L/G	35 db	60 db	60 db	60 db	60 db	55 db

SCHEMATIC

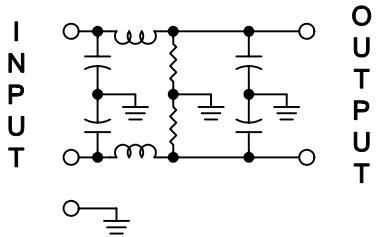

NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ±.030 ± .XXX ±.010	CONTRACT NO.		FILTER CONCEPTS INC.			
	APPROVALS		DATE		APPLICATION DRAWING	
	DRAWN		06-13-02		DC15 FILTER	
	CHECKED		08-05-02		SIZE	CODE IDENT NO.
	DANNIEL VUONG				B	7343
MATERIAL					SCALE	1/1
FINISH					SHEET 1 OF 1	