



- Bumpers can be used as mounting feet to prevent equipment from sliding or moving.
- Designed for through hole installation.
- 60-70 Durometer Range.
- 29 sizes available that will accommodate various mounting holes and panel thicknesses.
- Provide vibration dampening.

Heyco® Screw-In Rubber Pocket Bumpers

PART DIMENSIONS								BLACK PART NO.		E Fastner Hole Dia.*	
A Outside Diameter		B Overall Height		C Recess Diameter		D Recess Depth		No Washer	With Steel Washer		
in.	mm.	in.	mm.	in.	mm.	in.	mm.			in.	mm.

Type RS

.50	12,7	.25	6,4	.25	6,4	.16	4,0	-	G2201	.13	3,2
.63	15,9	.38	9,5	.25	6,4	.19	4,7	-	G2205		
.75	19,1	.38	9,5	.32	7,9	.19	4,7	-	G2209	.16	4,0
.81	20,6	.72	18,3	.38	9,5	.28	7,1	-	G2213	.22	5,5
1.00	25,4	.81	20,6	.25	6,4	.44	11,1	-	G2217	.13	3,2
		1.00	25,4	.31	7,9	.63	15,9	G2220	G2221	.16	4,0
1.09	27,7	.63	15,9	.44	11,1	.41	10,3	-	G2225	.19	4,7

Type RR

.50	12,7	.25	6,4	.25	6,4	.16	4,0	-	G2229	.09	2,4
.75	19,1	.56	14,3	.38	9,5	.25	6,4	-	G2233	.19	4,7
		.75	19,1	.31	7,9	.25	6,4	-	G2237	.13	3,2
.81	20,6	.81	20,6	.47	11,9	.44	11,1	-	G2241	.25	6,4
.94	23,8	.35	8,9	.38	9,5	.18	4,6	-	G2245		
		.38	9,5	.38	9,5	.22	5,5	G2244	-	.19	4,7
.97	24,6	.34	8,7	.38	9,5	.19	4,7	-	G2249		
		.44	11,1	.38	9,5	.19	4,7	-	G2253		
1.00	25,4	.50	12,7	.50	12,7	.25	6,4	-	G2257	.22	5,5
		.56	14,3	.53	13,5	.31	7,9	-	G2261	.28	7,1
1.25	31,8	1.25	31,8	.38	9,5	.75	19,1	-	G2267	.25	6,4
		1.88	47,6	.38	9,5	.75	19,1	-	G2271		
1.50	38,1	.63	15,9	.50	12,7	.34	8,7	-	G2275	.19	4,7
		.75	19,1	.34	8,7	.34	8,7	G2278	G2279	.31	7,9
		.75	19,1	.47	11,9	.50	12,7	-	G2283	.25	6,4
1.70	43,2	1.12	28,4	.60	15,2	.72	18,3	G2286			
1.71	44,5	1.66	44,5	.62	15,9	.50	12,7	G2290			
2.50	63,5	1.00	25,4	1.13	28,6	.50	12,7	G2294 G2296† G2298†	-	.38	9,6
		2.00	50,8	1.13	28,6	1.25	28,6	G2302			


Type S

1.00	25,4	.50	12,7	.36 / .43	9,0 / 10,9	.20 / .16	5,0 / 4,1	-	G2307	.19	4,7
1.50	38,1	.75	19,1	.75	19,1	.38	9,5	-	G2311	.25	6,4


Standard color black. Standard material SBR (Styrene Butadiene Rubber), 60-70 durometer.

*Fastener not included.


†Part Nos. G2296 and G2298 are made from White SBR, 60-70 durometer.

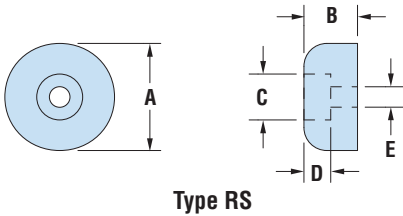

Type RS

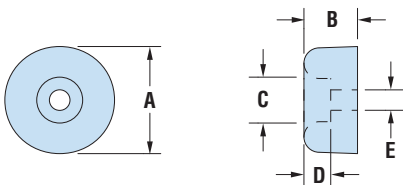

Type RR

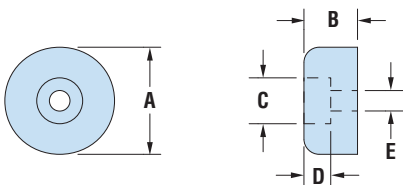

Type S

*Quick
Specs*

Material
Temperature Range

SBR
-40°F (-40°C) to 221°F (105°C)