



## Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	Application

## Complementary

Electrical connection	1/2"20 UNF, 3 pins straight female connector
Cable connector fixing	Screw-on
Collar material	Stainless steel 316L
Status LED	Without
Cable length	32.81 ft (10 m)
Cable outer diameter	0.2 in (5 mm)
Cable composition	3 x 0.34 mm <sup>2</sup>
Wire insulation material	PVC
System Voltage	250 V AC 300 V DC
Line Rated Current	4 A
Contact resistance	5000 µOhm
Insulating resistance	1 GΩ
Product weight	0.88 lb(US) (0.4 kg)

## Environment

IP degree of protection	IP69K
ambient air temperature for operation	-13...185 °F (-25...85 °C) (static)
ambient air temperature for storage	-31...212 °F (-35...100 °C)


## Offer Sustainability

Not Green Premium product	Not Green Premium product
Compliant - since 0601 - Schneider Electric declaration of conformity	Compliant - since 0601 - Schneider Electric declaration of conformity
WARNING: This product can expose you to chemicals including:	WARNING: This product can expose you to chemicals including:
Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and	Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and
Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm.	Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm.
For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>	For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>

## Contractual warranty

Warranty period	18 months
-----------------	-----------


## Dimensions

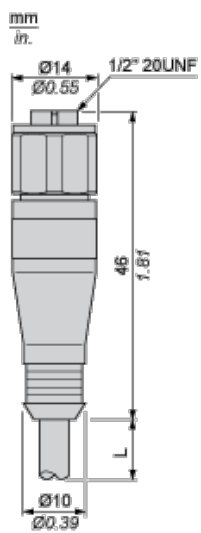

L : Length of cable

## Connections and Schemes

### Connectors



GN : Green

RD/WH :Red / White

RD/BK :Red / Black