
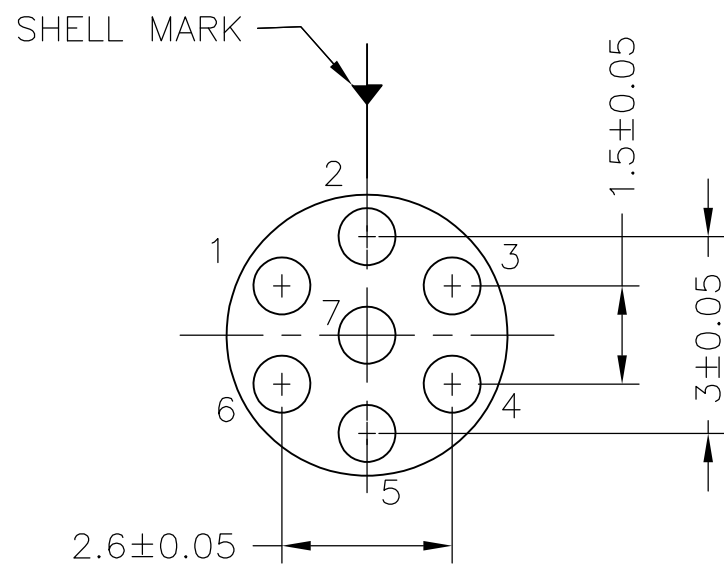
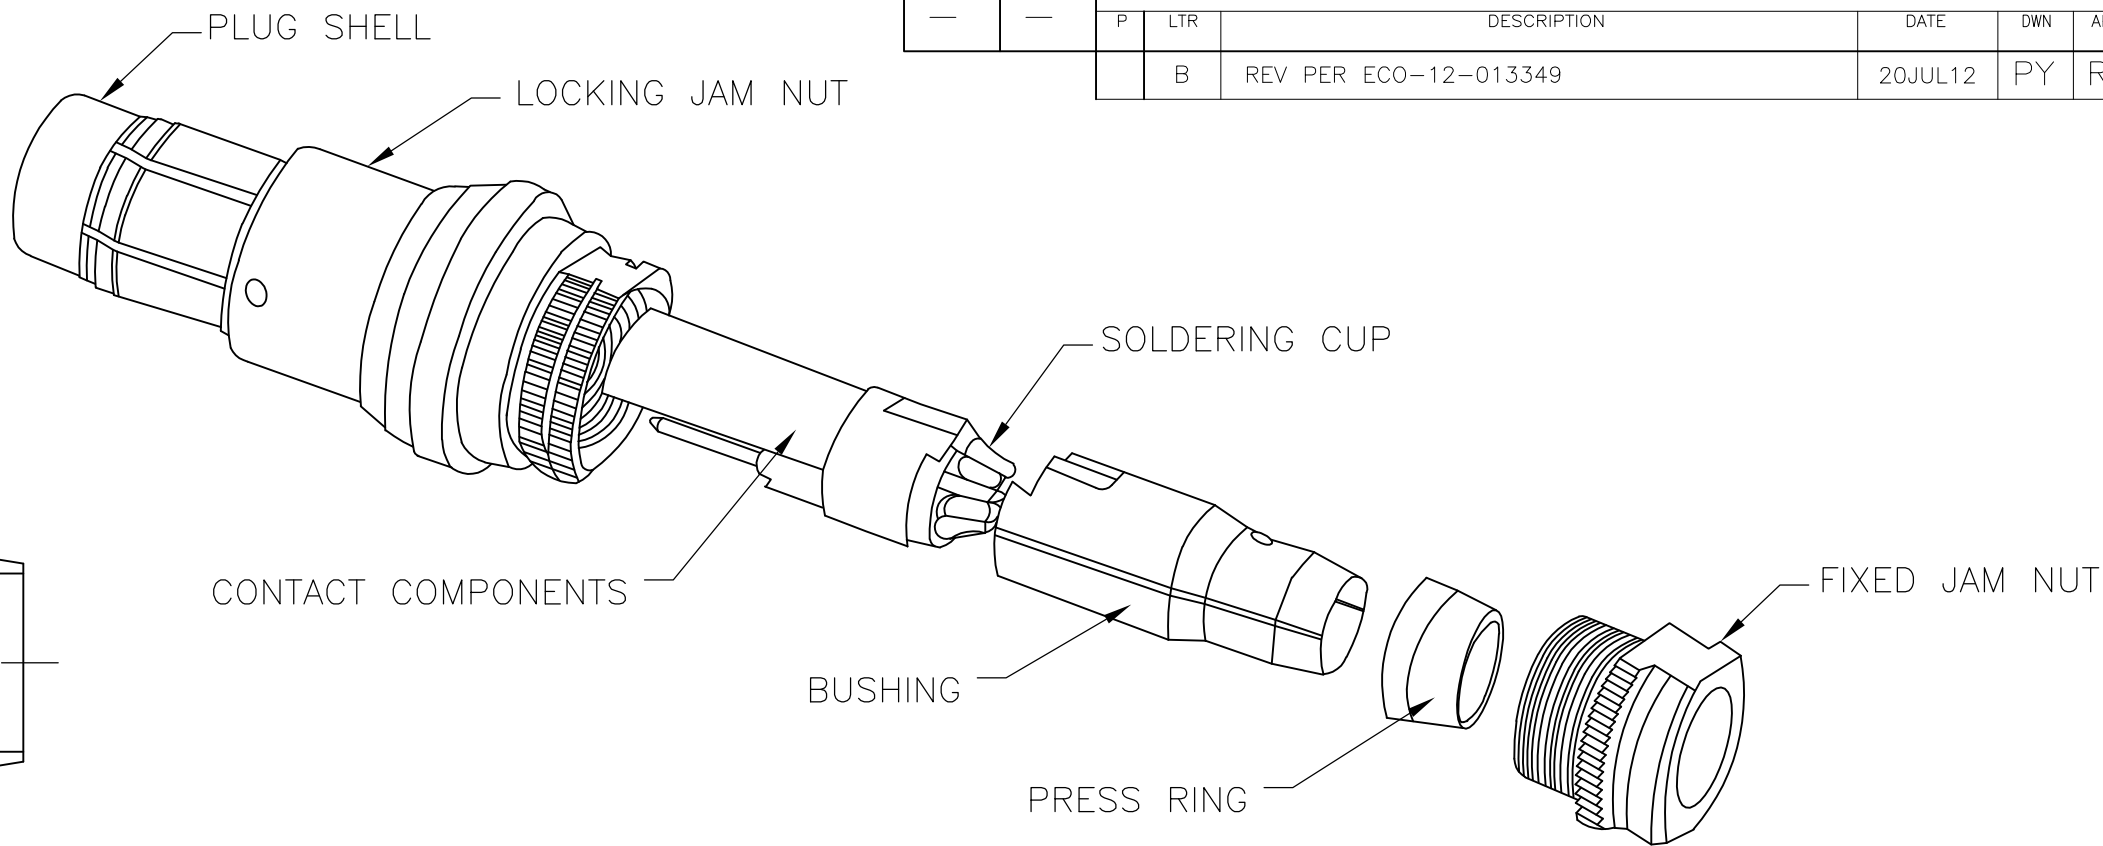
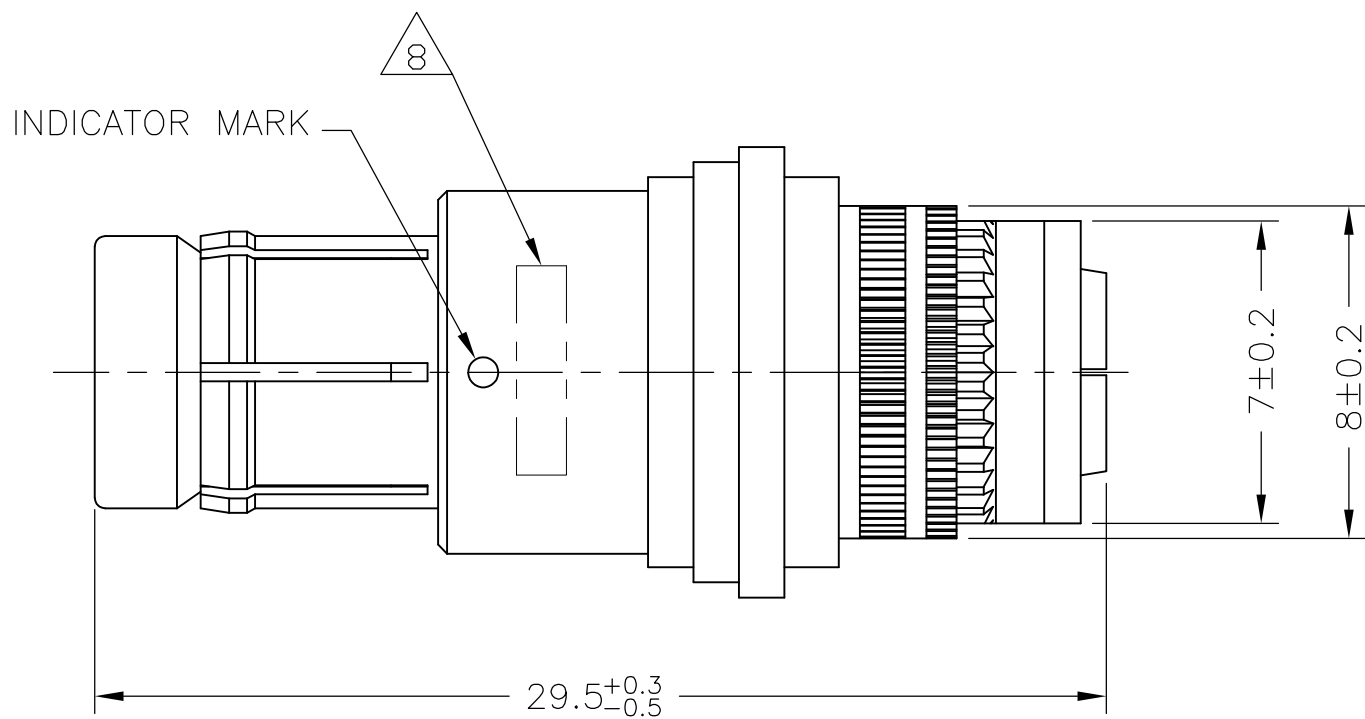
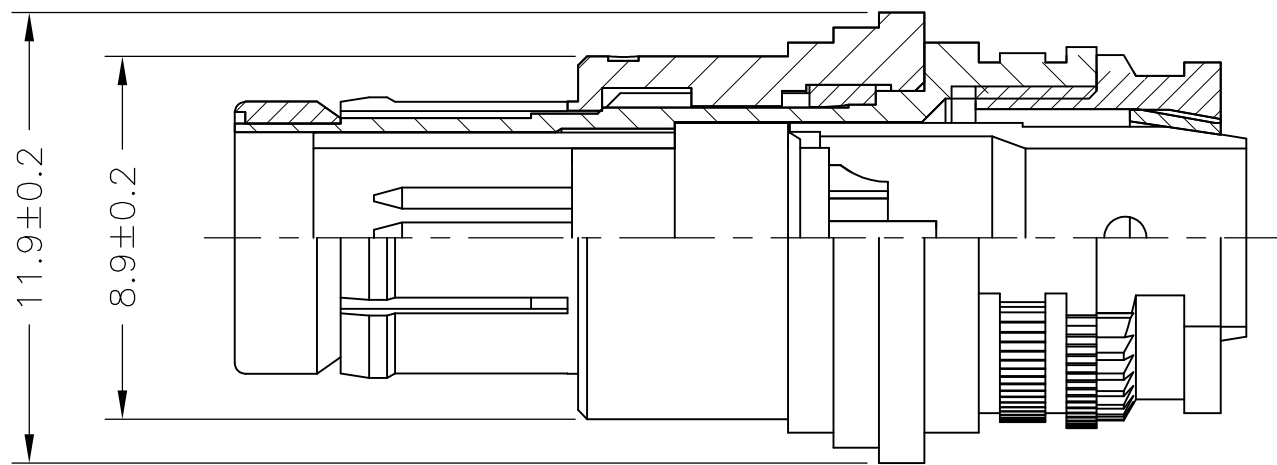
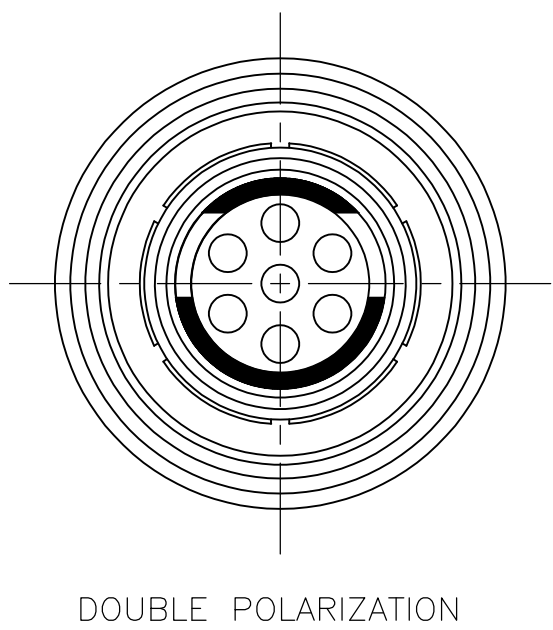


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	APVD
-	-	B		REV PER ECO-12-013349	20JUL12	RG

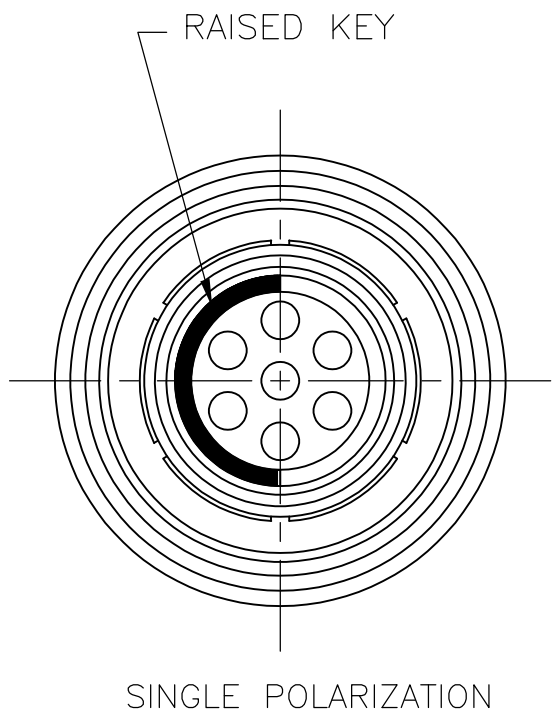

CAVITY IDENTIFICATION WHEN VIEWED
FROM MATING FACE

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS TOLERANCE ARE ± 0.20 .
2. DWV RATING: 875VAC @ SEA LEVEL
3. WORKING TEMPERATURE: $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$

4 MATERIAL:
CONTACT : COPPER ALLOY
SHELL : COPPER ALLOY
INSULATOR : PEEK

5 FINISH
CONTACT: GOLD OVER NICKEL
SHELL : BLACK CHROMIUM

6. WIRE SIZE: 28 AWG MAX.

7. MATING STYLE - PUSH TO MATE; PULL TO UNLOCK

8 PART IS MARKED WITH THE TE PART NUMBER, CHINA, DATE CODE, AND LOT ID.

2	CHROMIUM-BLACK	DOUBLE	SOLDERING	1	2157945-2
1	CHROMIUM-BLACK	SINGLE	SOLDERING	1	2157945-1
KEYING	FINISH	POLARIZATION	TERMINATION	SHELL SIZE	TE PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN C.C THOMAS 06APR2012 CHK R. GROSS 06APR2012 APVD R. GROSS 06APR2012 PRODUCT SPEC 108-127005 APPLICATION SPEC		
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC $\pm -$ 1 PLC $\pm -$ 2 PLC ± 0.2 3 PLC $\pm -$ 4 PLC $\pm -$ ANGLES $\pm 3^{\circ}$		NAME CIRCULAR HD PLUG WITH PIN, CONTACTS 7 POS. -		
MATERIAL	4	5	FINISH	SIZE A2	CAGE CODE 00779
CUSTOMER DRAWING			SCALE NTS	DRAWING NO C=2157945	RESTRICTED TO -
			SHEET 1 OF 1	REV B	