


DC spark-over voltage ^{1) 2)}	180 ... 220			V
Initial values				
Ignition time t _i after 150 hours in darkness ³⁾	95	99.9	100	%
at –20 °C	≤ 4	≤ 5	≤ 7	s
at +25; 125 °C	≤ 2	≤ 3	≤ 4	s
Electrical life time				
Maximum increase of DC spark-over voltage	25			V
Switching operations at +25; 125 °C				
Switching frequency 10 ... 25 Hz	2 000 000			Ignitions
Switching frequency < 10Hz	4 000 000			Ignitions
Test circuit parameters				
Open circuit voltage V ₀	230			V _{ac}
Loading resistance R	15			kΩ
Discharge capacitance C	2.2			μF
Inductance L	10			μH
Discharge peak current I _p	~ 300			A
Insulation resistance at 100 V _{dc}	> 0.1			GΩ
Capacitance at 1 MHz	< 2			pF
Weight	~ 1.5			g
Operation and storage temperature	-20 ... +125			°C
Climatic category (IEC 60068-1)	20/ 125/ 21			
Marking, red	EPCOS CS 230 YYMM O CS - Series 230 - Nominal voltage YY - Year of production MM - Month of production O - Non radioactive			

¹⁾ At delivery AQL 0.65 level II, DIN ISO 2859

²⁾ In ionized mode, after load

³⁾ Time from capacitor charged to the first high voltage spark

Test circuit: $V_{ac} = 198 \text{ V}$; $R = 36 \text{ k}\Omega$; $C = 2.2 \text{ }\mu\text{F}$

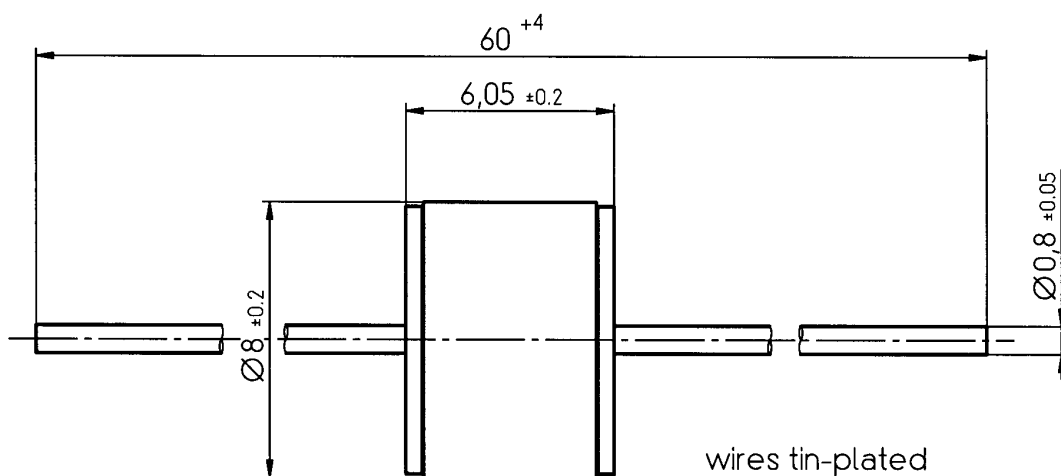

wires tin-plated

Not to scale

Dimensions in mm

Non controlled document

© EPCOS AG 2002. Reproduction, publication and dissemination of this data sheet, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.