



Features/Benefits

- **Connect headsets and phones**
- **Answer and hang up for telephone**
- **Various lever designs**

Typical Applications

- **Telecommunication**
- **Computer peripherals**

Specifications

CONTACT ARRANGEMENT: DPDT

CONTACT RATING: 0.2 A @ 30 VDC

INITIAL CONTACT RESISTANCE: 50m Ω max.

INSULATION RESISTANCE: 100M Ω min. @ 500 VDC

DIELECTRIC STRENGTH: 500 V AC (50-60 Hz)

OPERATING TEMPERATURE: -20°C to +70°C

OPERATING FORCE: 50 ± 20 gf

Materials


LEVER: POM (UL94 HB)

COVER: POM (UL94 HB)

TERMINAL: Silver plated





NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

PART NUMBER	LIFE CYCLE	PACKAGING
HS-2206-A1 NS	300,000 cycles	5,000 pieces

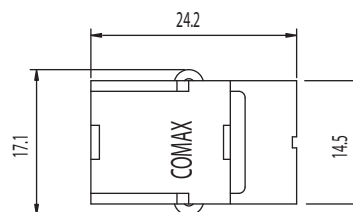



		TRAVEL POSITION (X)	
①	③	ON	OFF
②	③	OFF	ON
④	⑥	ON	OFF
⑤	⑥	OFF	ON

6.85 Max 2.65 Min (m/m)


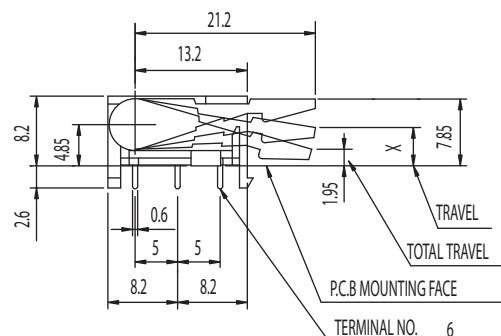


Hook Switch

PART NUMBER	LIFE CYCLE	PACKAGING
HS-2206-D NS	100,000 cycles	5,000 pieces

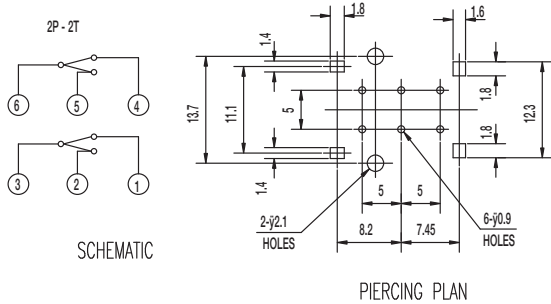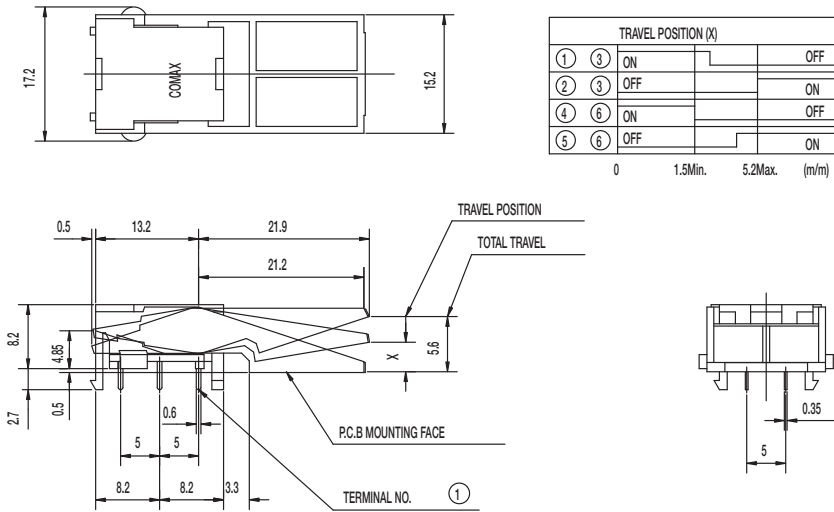

PART NUMBER	LIFE CYCLE	PACKAGING
HS-2206-E NS	100,000 cycles	5,000 pieces

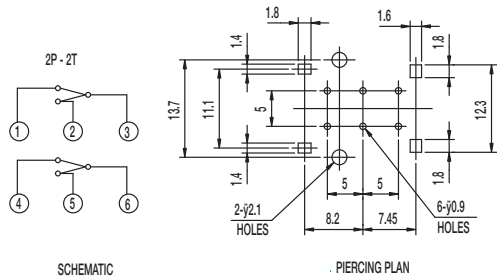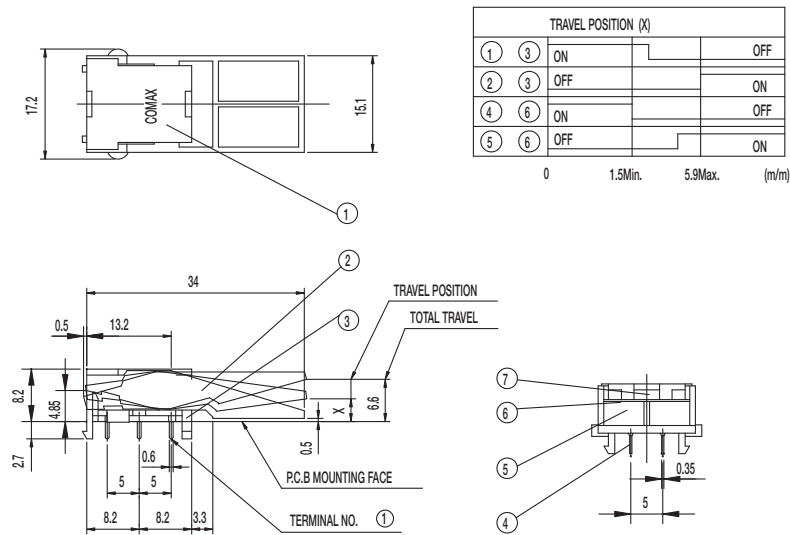

Dimensions are shown: mm
Specifications and dimensions subject to change